

MCR-C-UI-UI-DCI

MCR 3-Way Isolation Amplifier, Configurable

1. Short description

- configurable inputs and outputs
- signal conversion/amplification
- 3-way-isolation
- zero/span adjustment
- 17.5 mm ME housing

The MCR 3-way modules are used for electrical isolation and conversion of analog signals. The modules guarantee electrical isolation of standard analog signals. The module input and output electronics are isolated by a DC/DC converter from the auxiliary supply (3-way-isolation, fig. 2).




Fig. 2

The required auxiliary power supply is signalized via a green power LED. Thus it is clearly evident whether an auxiliary power supply is available.

The MCR modules ensure reliable decoupling of a sensor circuit from the processing circuit and thus also avoid cross-coupling of several sensor circuits. The 3-way isolation means that the modules can be used universally, both on site or in the vicinity of the controller for the conversion of signals and as electrical isolation, and along the transmission path to bridge apparent ohmic resistance.

Two sealed potentiometers with front access allow an adjustment between zero and span in order to perform a measuring adjustment.

The desired configuration to which the device is to be adapted (see ordering example and combination table) must be indicated when ordering. If no information is given after the ordering example provided (page 4), the devices are delivered with the standard configuration (input signal 0-10 V, output signal 0-10 V).



Fig. 1

DIP switches allow a reconfiguration of the inputs and outputs of the isolation amplifiers so that more than 200 signal variations are possible.

Signal conversion and the electrical isolation of the analog signals is carried out using an inductive transmission process. In addition, a filter downstream of the transmitter reduces interference.

The MCR 3-way modules snap onto symmetrical mounting rails according to EN 50 022. The signal lines are securely connected to the module via pluggable screw connections and are clearly marked.

MCR-C-UI-UI-DCI MCR 3-Way Isolation Amplifier, Configurable

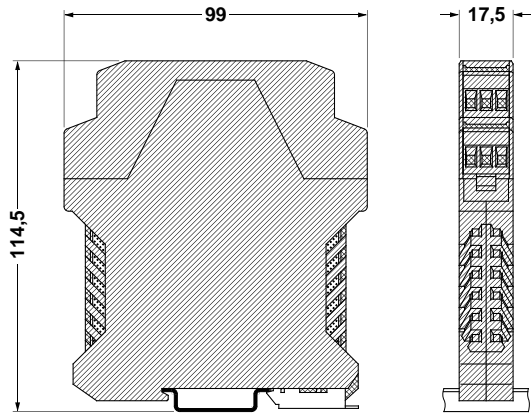


Fig. 3



Fig. 4

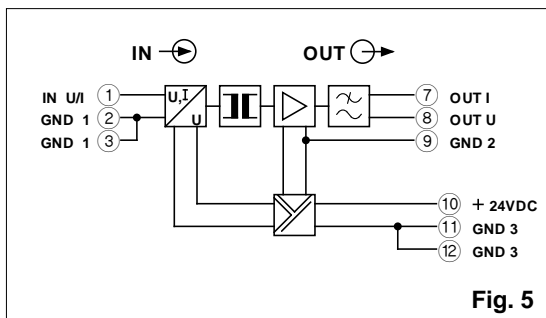


Fig. 5

MCR-C-UI-UI-DCI

with configurable input and output



(IEC) [mm ²]	rigid solid	flexible rigid	AWG
Connection data	0.2-2.5	0.2-2.5	24-14

2. Description

MCR 3-way-isolator, for analog signal isolation

MCR 3-way-isolator, as above, however with a cut-off frequency of (3 dB) 450 Hz

2.1. Technical Data

Input

Input signal
Possible adjustment: zero span
Max. input signal
Input resistance

0...10 V, indicate other setting in the order
± 2 %
± 2 %
30 V or 50 mA
1 MΩ at U-input
50 Ω at I-input

Output

Output signal
Max. output signal
Load

0...10 V, indicate other setting in the order
15 V or 30 mA
≥ 10 kΩ at U-output
≤ 500 Ω at I-output

2.2. General Data

Supply voltage
Current consumption (without load)
Transmission error
Temperature coefficient
Cut-off frequency (3 dB)
Ascent time (10-90 %)
Test voltage:
Protection circuit
Ambient temperature range
Type of connection
Installed position / mounting
Dimensions (W / H / D)
Conductor diameter
Type of housing

MCR-C-UI-UI-DCI	MCR-C-UI-UI-450-DCI
18...30 V	18...30 V
< 30 mA	< 30 mA
0.1 % of end value	0.1 % of end value
0.0075 %/K	0.0075 %/K
30 Hz	450 Hz
11 ms	0.8 ms
1.5 kV, 50 Hz, 1 min.	1.5 kV, 50 Hz, 1 min.
1 kV, 50 Hz, 1 min.	1 kV, 50 Hz, 1 min.
transient protection	transient protection
-20 °C to +65 °C	-20 °C to +65 °C
pluggable screw terminal	pluggable screw terminal
COMBICON	COMBICON
as desired	as desired
(17.5 / 99 / 114.5) mm	(17.5 / 99 / 114.5) mm
0.2-2.5 mm ² (AWG 24-14)	0.2-2.5 mm ² (AWG 24-14)
polyamide PA unreinforced	polyamide PA unreinforced

¹⁾ If no further details are given as to configuration, the device is supplied in the standard configuration (see order key, page 4)!

²⁾ Only MCR-C-UI-UI-DCI Order No.: 28 10 91 3

MCR-C-UI-UI-DCI MCR 3-Way Isolation Amplifier, Configurable

2.3. EMC Electromagnetic Compatibility



Complies with EMC guideline 89/336/EEC and low voltage directive 73/23/EEC

Immunity to interference in acc. with EN 50082-2

• Electrostatic discharge (ESD)	EN 61000-4-2	Criterion B 8 kV discharge in air
• Electromagnetic HF field: Amplitude modulation Pulse modulation	EN 61000-4-3	Criterion A 10 V/m 10 V/m
• Fast transients (Burst)	EN 61000-4-4	Criterion B I/O(S ¹) : 2 kV/5 kHz
• Surge voltage capacities (Surge)	EN 61000-4-5	Criterion B I/O(S ¹) : 2 kV/42 Ω
• Conducted disturbance	EN 61000-4-6	Criterion A I/O(S ¹) : 10 V
• Noise emission in acc. with EN 50081	EN 55011	Class A

EN 61000 corresponds to IEC 1000

EN 55011 corresponds to CISPR11

1) I≐ Input / O≐Output / S≐Supply

Criterion A: Normal operating behavior within the defined limits.

Criterion B: Temporary impairment to operational behavior that is corrected by the device itself.

Class A: Area of application: industry, without special installation measures.

2.4. Connection Scheme MCR 3-way isolation amplifier, configurable

- ① pluggable screw terminal blocks (supply, signal output)
- ② ZERO/SPAN potentiometer
- ③ pluggable screw terminal block (signal input)
- ④ upper part of housing can be slid open to set DIP switches
- ⑤ Metal latch for fixing to the mounting rail

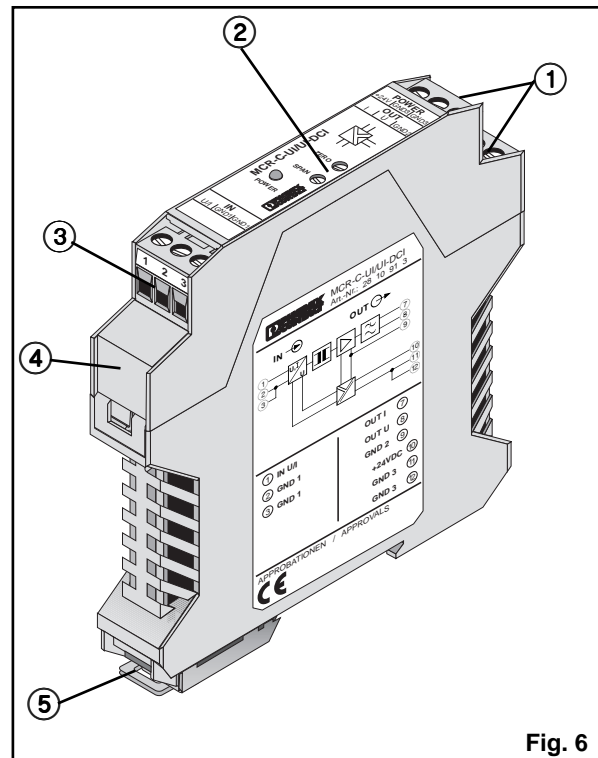


Fig. 6

MCR-C-UI-UI-DCI MCR 3-Way Isolation Amplifier, Configurable

3. Order key

3.1. Combination table for input and output signals

Input	Output								
	0 - 10 V	± 10 V	0 - 5 V	± 5 V	1 - 5 V	0 - 5 mA	0 - 10 mA	0 - 20 mA	4 - 20 mA
0 - 60 mV	x	x	x	x	x	x	x	x	x
0 - 100 mV	x	x	x	x	x	x	x	x	x
0 - 200 mV	x	x	x	x	x	x	x	x	x
0 - 300 mV	x	x	x	x	x	x	x	x	x
0 - 500 mV	x	x	x	x	x	x	x	x	x
0 - 1 V	x	x	x	x	x	x	x	x	x
0 - 2 V	x	x	x	x	x	x	x	x	x
0 - 2.5 V	x	x	x	x	x	x	x	x	x
0 - 5 V	x	x	x	x	x	x	x	x	x
0 - 10 V	x	x	x	x	x	x	x	x	x
0 - 20 V	x	x	x	x	x	x	x	x	x
± 60 mV	x	x	x	x			x	x	
± 100 mV	x	x	x	x			x	x	
± 200 mV	x	x	x	x			x	x	
± 300 mV	x	x	x	x			x	x	
± 500 mV	x	x	x	x			x	x	
± 1 V	x	x	x	x			x	x	
± 2 V	x	x	x	x			x	x	
± 2.5 V	x	x	x	x			x	x	
± 5 V	x	x	x	x			x	x	
± 10 V	x	x	x	x			x	x	
± 20 V	x	x	x	x			x	x	
0 - 5 mA	x	x	x	x	x	x	x	x	x
0 - 10 mA	x	x	x	x	x	x	x	x	x
0 - 20 mA	x	x	x	x	x	x	x	x	x
± 5 mA	x	x	x	x			x	x	
± 10 mA	x	x	x	x			x	x	
± 20 mA	x	x	x	x			x	x	
1 - 5 V	x	x	x	x	x		x	x	x
4 - 20 mA	x	x	x	x	x		x	x	x

Further ranges are available on request!

3.2. Order key MCR-C-UI-UI-DCI

Input	Output
MCR-C-UI-UI-DCI / 0-10 V	0-10 V
for others, please refer to combination table	for others, please refer to combination table

4. Notes on Connection


4.1. Standard setting:

The 3-way isolation amplifier is supplied factory-adjusted, with sealed potentiometers. The set configuration is indicated in handwriting on the side label.

4.2. Configuration


4.2.1. Opening the device (Fig. 7)

The snap lock of the upper part of the housing is released on both sides with the help of a screwdriver ①. The upper part of the housing and the electronics can now be pulled out by about 3 cm.

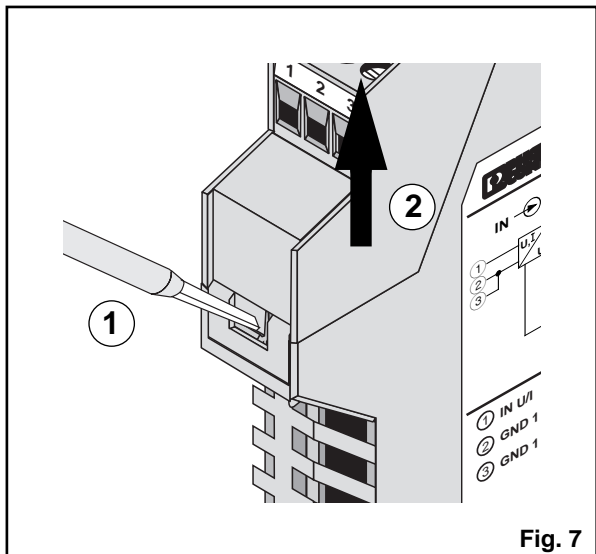

4.2.2. Changing the configuration

Setting of the required **input** range by means of switch **DIP 1**, and of the **output** range by means of **DIP 2** (see Fig. 8) as indicated in the relevant table.

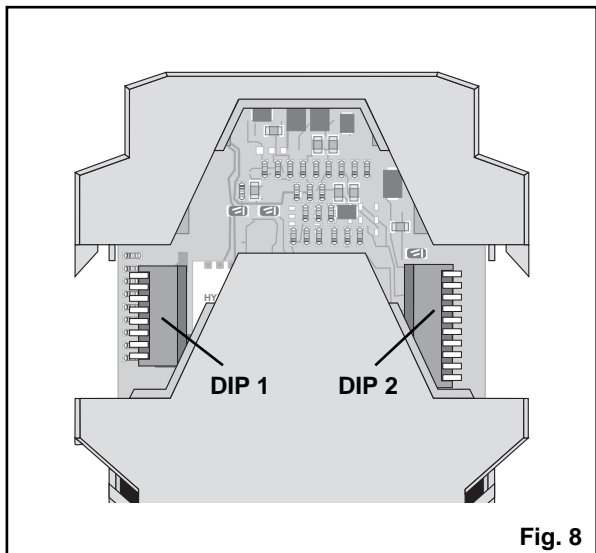

MCR-C-UI-UI-DCI MCR 3-Way Isolation Amplifier, Configurable

4.3. Setting of the signal ranges

4.3.1. Input signal range (DIP 1)

Select one of the possible input signal ranges by configuring the switch DIP 1 according to table 1. Exception: Bipolar input signals are not allowed for the output signal ranges 4...20 mA and 1...5 V (see tables 4/6, page 9/10)!

Input	Switch DIP 1							
	1	2	3	4	5	6	7	8
0... 60 mV		ON				ON	ON	ON
0...100 mV		ON					ON	ON
0...200 mV			ON				ON	ON
0...300 mV			ON			ON		ON
0...500 mV		ON				ON		
0 ... 1 V			ON			ON		
0 ... 2 V				ON		ON		
0 ... 2.5V		ON						
0 ... 5 V			ON					
0... 10 V				ON				
0... 20 V					ON			
± 60 mV		ON				ON	ON	ON
± 100 mV		ON					ON	ON
± 200 mV			ON				ON	ON
± 300 mV			ON			ON		ON
± 500 mV		ON				ON		
± 1 V			ON			ON		
± 2 V				ON		ON		
± 2.5 V		ON						
± 5 V			ON					
± 10 V				ON				
± 20 V					ON			
0... 5 mA	ON			ON		ON	ON	ON
0...10 mA	ON	ON				ON		
0...20 mA	ON		ON			ON		
± 5 mA	ON			ON		ON	ON	ON
± 10 mA	ON	ON				ON		
± 20 mA	ON		ON			ON		
1...5 V			ON					
4...20 mA	ON		ON			ON		


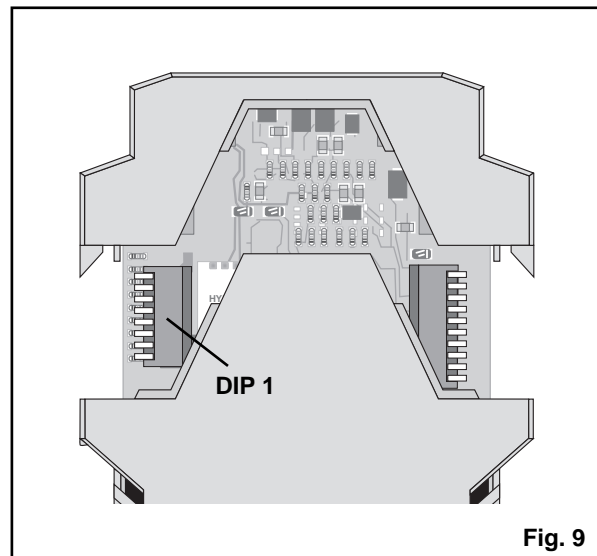


Fig. 9

MCR-C-UI-UI-DCI MCR 3-Way Isolation Amplifier, Configurable

4.3.2. Output (DIP 2) with single adjustment (0...5 V / 0...10 V output)

Set the output range by means of switch DIP 2. Take the selected input range into account! Set the lower range value and the upper range (full-scale) value of the input signal, using a calibration source. Adjust the respective output value with a digital multimeter (see table 2).

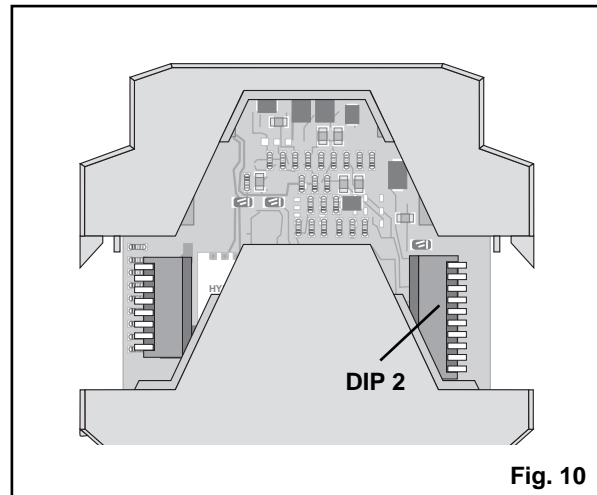

Input	Output 0...5 V Switch DIP 2									
	1	2	3	4	5	6	7	8	9	10
0... 60 mV			ON			ON				
0...100 mV			ON			ON				
0...200 mV			ON			ON				
0...300 mV			ON			ON				
0...500 mV			ON			ON				
0 ... 1 V			ON			ON				
0 ... 2 V			ON			ON				
0 ... 2.5 V			ON			ON				
0 ... 5 V			ON			ON				
0... 10 V			ON			ON				
0... 20 V			ON			ON				
± 60 mV		ON		ON			ON			
± 100 mV		ON		ON			ON			
± 200 mV		ON		ON			ON			
± 300 mV		ON		ON			ON			
± 500 mV		ON		ON			ON			
± 1 V		ON		ON			ON			
± 2 V		ON		ON			ON			
± 2.5 V		ON		ON			ON			
± 5 V		ON		ON			ON			
± 10 V		ON		ON			ON			
± 20 V		ON		ON			ON			
0... 5 mA			ON			ON				
0...10 mA			ON			ON				
0...20 mA			ON			ON				
± 5 mA		ON		ON			ON			
± 10 mA		ON		ON			ON			
± 20 mA		ON		ON			ON			
1...5 V								ON		
4...20 mA								ON		

Input	Output 0...10 V Switch DIP 2									
	1	2	3	4	5	6	7	8	9	10
0... 60 mV			ON		ON	ON				
0...100 mV			ON		ON	ON				
0...200 mV			ON		ON	ON				
0...300 mV			ON		ON	ON				
0...500 mV			ON		ON	ON				
0 ... 1 V			ON		ON	ON				
0 ... 2 V			ON		ON	ON				
0 ... 2.5 V			ON		ON	ON				
0 ... 5 V			ON		ON	ON				
0... 10 V			ON		ON	ON				
0... 20 V			ON		ON	ON				
± 60 mV		ON		ON	ON			ON		
± 100 mV		ON		ON	ON			ON		
± 200 mV		ON		ON	ON			ON		
± 300 mV		ON		ON	ON			ON		
± 500 mV		ON		ON	ON			ON		
± 1 V		ON		ON	ON			ON		
± 2 V		ON		ON	ON			ON		
± 2.5 V		ON		ON	ON			ON		
± 5 V		ON		ON	ON			ON		
± 10 V		ON		ON	ON			ON		
± 20 V		ON		ON	ON			ON		
0... 5 mA			ON		ON	ON				
0...10 mA			ON		ON	ON				
0...20 mA			ON		ON	ON				
± 5 mA		ON		ON	ON			ON		
± 10 mA		ON		ON	ON			ON		
± 20 mA		ON		ON	ON			ON		
1...5 V					ON				ON	
4...20 mA					ON				ON	

Adjustment after set value of the lower or upper range value to:	Output 0...5 V	Output 0...10 V
ZERO pot	0 V ± 0.5 mV	0 V ± 0.5 mV
SPAN pot	5 V ± 0.5 mV	10 V ± 0.5 mV

MCR-C-UI-UI-DCI MCR 3-Way Isolation Amplifier, Configurable

4.3.3. Output with adjustment point calculation (±5 V / ±10 V/1...5 V/0...5;10;20 mA/4...20 mA)

- Set the output range by means of switch DIP 2. Take the selected input range into account!
- Set the lower range value and the upper range (full-scale) value of the input signal, using a calibration source.
- Note down the output value measured with a digital multimeter.

Output signal range:

± 5 V, ± 10 V, 1...5 V, 4...20 mA,		0...20 mA	
Set value (input)	Measured value (output)	Set value (input)	Measured value (output)
Lower range value	MW 1	Lower range value +10% of the range	MW 1
Upper range (full scale) value	MW 2	Upper range (full scale) value	MW 2

• Calculation of the F.S. adjustment point A

$$A = \frac{MW 2 \cdot \text{constant}}{MW 2 - MW 1}$$



Refer to the following tables 3-5, page 8-9 for the values for the constant, the output upper range value and adjustment tolerance!

Adjustment:

- Set the upper range (full-scale) value of the input signal range using a calibration source.
- SPAN pot: FS adjustment point A ± adjustment tolerance
- ZERO pot: output upper range (full-scale) ± adjustment tolerance

Table 3

Output ± 5 V											Output ± 10 V										
Input	1	2	3	4	5	6	7	8	9	10	Input	1	2	3	4	5	6	7	8	9	10
0... 60 mV	ON		ON					ON	ON	ON	0... 60 mV	ON		ON		ON			ON	ON	ON
0...100 mV	ON		ON					ON	ON	ON	0...100 mV	ON		ON		ON			ON	ON	ON
0...200 mV	ON		ON					ON	ON	ON	0...200 mV	ON		ON		ON			ON	ON	ON
0...300 mV	ON		ON					ON	ON	ON	0...300 mV	ON		ON		ON			ON	ON	ON
0...500 mV	ON		ON					ON	ON	ON	0...500 mV	ON		ON		ON			ON	ON	ON
0 ... 1 V	ON		ON					ON	ON	ON	0 ... 1 V	ON		ON		ON			ON	ON	ON
0 ... 2 V	ON		ON					ON	ON	ON	0 ... 2 V	ON		ON		ON			ON	ON	ON
0 ... 2.5 V	ON		ON					ON	ON	ON	0 ... 2.5 V	ON		ON		ON			ON	ON	ON
0 ... 5 V	ON		ON					ON	ON	ON	0 ... 5 V	ON		ON		ON			ON	ON	ON
0... 10 V	ON		ON					ON	ON	ON	0... 10 V	ON		ON		ON			ON	ON	ON
0... 20 V	ON		ON					ON	ON	ON	0... 20 V	ON		ON		ON			ON	ON	ON
± 60 mV			ON			ON					± 60 mV			ON		ON	ON				
± 100 mV			ON			ON					± 100 mV			ON		ON	ON				
± 200 mV			ON			ON					± 200 mV			ON		ON	ON				
± 300 mV			ON			ON					± 300 mV			ON		ON	ON				
± 500 mV			ON			ON					± 500 mV			ON		ON	ON				
± 1 V			ON			ON					± 1 V			ON		ON	ON				
± 2 V			ON			ON					± 2 V			ON		ON	ON				
± 2.5 V			ON			ON					± 2.5 V			ON		ON	ON				
± 5 V			ON			ON					± 5 V			ON		ON	ON				
± 10 V			ON			ON					± 10 V			ON		ON	ON				
± 20 V			ON			ON					± 20 V			ON		ON	ON				
0... 5 mA	ON		ON					ON	ON	ON	0... 5 mA	ON		ON		ON			ON	ON	ON
0...10 mA	ON		ON					ON	ON	ON	0...10 mA	ON		ON		ON			ON	ON	ON
0...20 mA	ON		ON					ON	ON	ON	0...20 mA	ON		ON		ON			ON	ON	ON
± 5 mA			ON			ON					± 5 mA			ON		ON	ON				
± 10 mA			ON			ON					± 10 mA			ON		ON	ON				
± 20 mA			ON			ON					± 20 mA			ON		ON	ON				
1...5 V	ON							ON	ON		1...5 V	ON				ON			ON	ON	
4...20 mA	ON							ON	ON		4...20 mA	ON				ON			ON	ON	

MCR-C-UI-DCI MCR 3-Way Isolation Amplifier, Configurable

	Output ± 5 V	Output ± 10 V
Constant	10 V	20 V
Output upper range v.	5 V	10 V
Adjustment tolerance	± 0.5 mV	± 0.5 mV

Table 4

Output 1...5 V
Switch DIP 2

Input	1	2	3	4	5	6	7	8	9	10
0... 60 mV	ON			ON						
0...100 mV	ON			ON						
0...200 mV	ON			ON						
0...300 mV	ON			ON						
0...500 mV	ON			ON						
0 ... 1 V	ON			ON						
0 ... 2 V	ON			ON						
0 ... 2.5 V	ON			ON						
0 ... 5 V	ON			ON						
0... 10 V	ON			ON						
0... 20 V	ON			ON						
0... 5 mA	ON			ON						
0...10 mA	ON			ON						
0...20 mA	ON			ON						
4...20 mA			ON			ON				
1...5 V			ON			ON				

Output 1 ...5 V

Constant	4 V
Output upper range v.	5 V
Adjustment tolerance	± 1 mV

Table 5

Output 0...10 mA
Switch DIP 2

Input	1	2	3	4	5	6	7	8	9	10
0... 60 mV			ON			ON				
0...100 mV			ON			ON				
0...200 mV			ON			ON				
0...300 mV			ON			ON				
0...500 mV			ON			ON				
0 ... 1 V			ON			ON				
0 ... 2 V			ON			ON				
0 ... 2.5 V			ON			ON				
0 ... 5 V			ON			ON				
0... 10 V			ON			ON				
0... 20 V			ON			ON				
± 60 mV		ON		ON			ON			
± 100 mV		ON		ON			ON			
± 200 mV		ON		ON			ON			
± 300 mV		ON		ON			ON			
± 500 mV		ON		ON			ON			
± 1 V		ON		ON			ON			
± 2 V		ON		ON			ON			
± 2.5 V		ON		ON			ON			
± 5 V		ON		ON			ON			
± 10 V		ON		ON			ON			
± 20 V		ON		ON			ON			
0... 5 mA			ON			ON				
0...10 mA			ON			ON				
0...20 mA			ON			ON				
± 5 mA		ON		ON			ON			
± 10 mA		ON		ON			ON			
± 20 mA		ON		ON			ON			
1...5 V								ON		
4...20 mA								ON		

Table 5

Output 0...5 mA
Switch DIP 2

Input	1	2	3	4	5	6	7	8	9	10
0... 60 mV		ON		ON		ON				
0...100 mV		ON		ON		ON				
0...200 mV		ON		ON		ON				
0...300 mV		ON		ON		ON				
0...500 mV		ON		ON		ON				
0 ... 1 V		ON		ON		ON				
0 ... 2 V		ON		ON		ON				
0 ... 2.5 V		ON		ON		ON				
0 ... 5 V		ON		ON		ON				
0... 10 V		ON		ON		ON				
0... 20 V		ON		ON		ON				
0... 5 mA		ON		ON		ON				
0...10 mA		ON		ON		ON				
0...20 mA		ON		ON		ON				

MCR-C-UI-UI-DCI MCR 3-Way Isolation Amplifier, Configurable

Table 6

Input	Output 0...20 mA Switch DIP 2										Input	Output 4...20 mA Switch DIP 2									
	1	2	3	4	5	6	7	8	9	10		1	2	3	4	5	6	7	8	9	10
0... 60 mV			ON		ON	ON					0... 60 mV	ON			ON	ON					
0...100 mV			ON		ON	ON					0...100 mV	ON			ON	ON					
0...200 mV			ON		ON	ON					0...200 mV	ON			ON	ON					
0...300 mV			ON		ON	ON					0...300 mV	ON			ON	ON					
0...500 mV			ON		ON	ON					0...500 mV	ON			ON	ON					
0 ... 1 V			ON		ON	ON					0 ... 1 V	ON			ON	ON					
0 ... 2 V			ON		ON	ON					0 ... 2 V	ON			ON	ON					
0 ... 2.5 V			ON		ON	ON					0 ... 2.5 V	ON			ON	ON					
0 ... 5 V			ON		ON	ON					0 ... 5 V	ON			ON	ON					
0... 10 V			ON		ON	ON					0... 10 V	ON			ON	ON					
0... 20 V			ON		ON	ON					0... 20 V	ON			ON	ON					
± 60 mV		ON		ON	ON		ON				± 60 mV										
± 100 mV		ON		ON	ON		ON				± 100 mV										
± 200 mV		ON		ON	ON		ON				± 200 mV										
± 300 mV		ON		ON	ON		ON				± 300 mV										
± 500 mV		ON		ON	ON		ON				± 500 mV										
± 1 V		ON		ON	ON		ON				± 1 V										
± 2 V		ON		ON	ON		ON				± 2 V										
± 2.5 V		ON		ON	ON		ON				± 2.5 V										
± 5 V		ON		ON	ON		ON				± 5 V										
± 10 V		ON		ON	ON		ON				± 10 V										
± 20 V		ON		ON	ON		ON				± 20 V										
0... 5 mA			ON		ON	ON					0... 5 mA	ON			ON	ON					
0...10 mA			ON		ON	ON					0...10 mA	ON			ON	ON					
0...20 mA			ON		ON	ON					0...20 mA	ON			ON	ON					
± 5 mA		ON		ON	ON		ON				± 5 mA										
± 10 mA		ON		ON	ON		ON				± 10 mA										
± 20 mA		ON		ON	ON		ON				± 20 mA										
1...5 V					ON			ON			1...5 V			ON		ON	ON				
4...20 mA					ON			ON			4...20 mA			ON		ON	ON				


	Output 0...20 mA	Output 4...20 mA
Constant	18 mA	16 mA
Output upper range v.	20 mA	20 mA
Adjustment tolerance	± 1 µA	± 1 µA

MCR-C-UI-UI-DCI MCR 3-Way Isolation Amplifier, Configurable

4.4. Adjustment

Adjustment of the module by means of two potentiometers (see Fig. 11)

- ZERO pot: 0-point adjustment
- SPAN pot: upper range (full-scale) adjustment

 **Allow a module warm-up time of 2 minutes before the adjustment!**

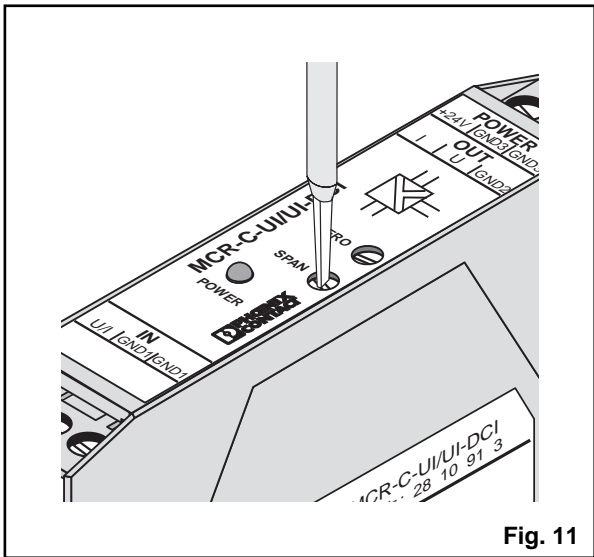


Fig. 11

5. Application example:

PH measurement of a liquid (Fig. 12)

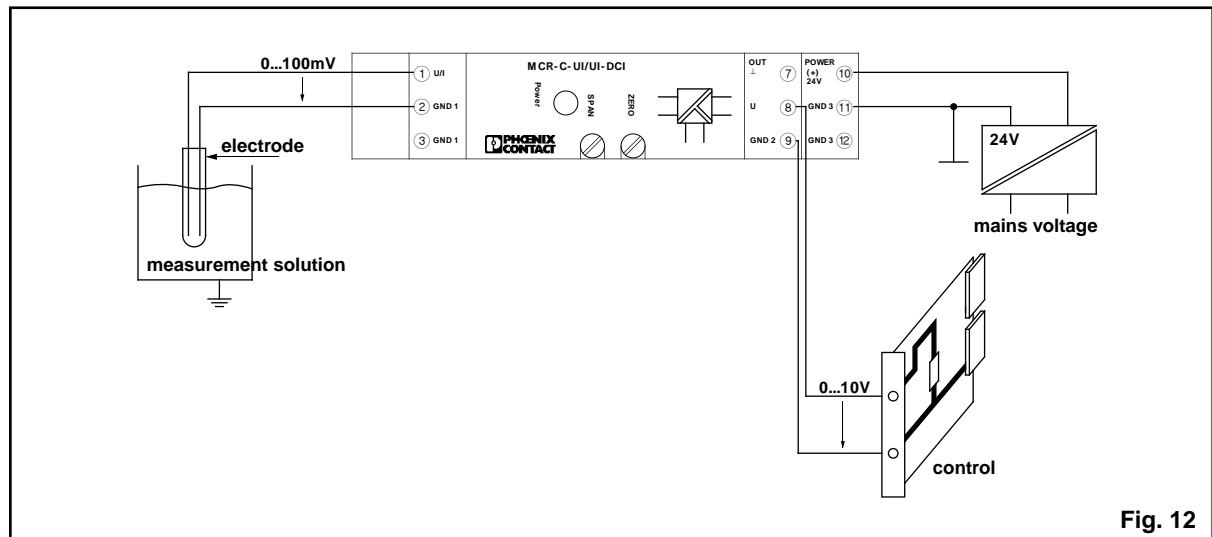


Fig. 12

<http://www.phoenixcontact.com>

© PHOENIX CONTACT 15.08.98 TNR: 5087125-00

© PHOENIX CONTACT 15.08.98 TNR: 5087125-00