


CGHV40200PP

200 W, 50 V, GaN HEMT

Description

Cree's CGHV40200PP is an unmatched, gallium nitride (GaN) high electron mobility transistor (HEMT). The CGHV40200PP, operating from a 50 volt rail, offers a general purpose, broadband solution to a variety of RF and microwave applications. GaN HEMTs offer high efficiency, high gain and wide bandwidth capabilities making the CGHV40200PP ideal for linear and compressed amplifier circuits. The transistor is available in a 4-lead flange package.

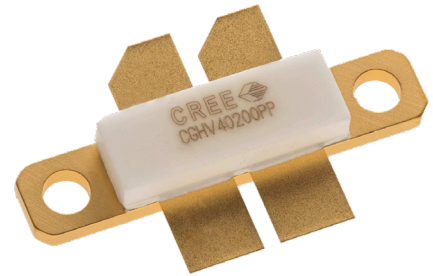

Package Type: 440199
PN: CGHV40200PP

Typical Performance Over 1.7-1.9 GHz ($T_c = 25^\circ\text{C}$), CW

| Parameter | 1.7 GHz | 1.8 GHz | 1.9 GHz | Units |
|---|---------|---------|---------|-------|
| Small Signal Gain | 21.7 | 21.0 | 20.1 | dB |
| Gain @ $P_{IN} = 38\text{ dBm}$ | 16.5 | 16.1 | 15.4 | dB |
| P_{OUT} @ $P_{IN} = 38\text{ dBm}$ | 270 | 250 | 218 | W |
| Drain Efficiency @ $P_{IN} = 38\text{ dBm}$ | 64 | 67 | 65 | % |

Features

- Up to 3.0 GHz Operation
- 21 dB Small Signal Gain at 1.8 GHz
- 250 W typical P_{SAT}
- 67% Efficiency at P_{SAT}
- 50 V Operation

Applications

- 2-Way Private Radio
- Broadband Amplifiers
- Cellular Infrastructure
- Test Instrumentation
- Class A, AB, Linear amplifiers suitable for OFDM, W-CDMA, EDGE, CDMA waveforms

 Large Signal Models Available for ADS and MWO

RoHS
COMPLIANT

Absolute Maximum Ratings (not simultaneous) at 25 °C Case Temperature

| Parameter | Symbol | Rating | Units | Conditions |
|---|-----------------|-----------|-------|------------|
| Drain-Source Voltage | V_{DSS} | 150 | Volts | 25 °C |
| Gate-to-Source Voltage | V_{GS} | -10, +2 | Volts | 25 °C |
| Storage Temperature | T_{STG} | -65, +150 | °C | |
| Operating Junction Temperature | T_J | 225 | °C | |
| Maximum Forward Gate Current ¹ | I_{GMAX} | 41.6 | mA | 25 °C |
| Maximum Drain Current ¹ | I_{DMAX} | 8.7 | A | 25 °C |
| Soldering Temperature ² | T_S | 245 | °C | |
| Screw Torque | τ | 40 | in-oz | |
| Thermal Resistance, Junction to Case ³ | $R_{\theta JC}$ | 0.94 | °C/W | 85 °C |
| Case Operating Temperature ^{3,4} | T_C | -40, +70 | °C | |

Notes:

¹ Current limit for long term, reliable operation per side of the device² Refer to the Application Note on soldering at wolfspeed.com/rf/document-library³ CGHV40200PP at $P_{DISS} = 166$ W⁴ See also, the Power Dissipation De-rating Curve on Page**Electrical Characteristics ($T_C = 25^\circ\text{C}$)**

| Characteristics | Symbol | Min. | Typ. | Max. | Units | Conditions |
|--|--------------|-------|------|-------|----------|---|
| DC Characteristics¹ | | | | | | |
| Gate Threshold Voltage | $V_{GS(th)}$ | -3.8 | -3.0 | -2.3 | V_{DC} | $V_{DS} = 10$ V, $I_D = 41.6$ mA |
| Gate Quiescent Voltage | $V_{GS(Q)}$ | - | -2.7 | - | V_{DC} | $V_{DS} = 50$ V, $I_D = 2.0$ A |
| Saturated Drain Current ² | I_{DS} | 27.0 | 38.7 | - | A | $V_{DS} = 6.0$ V, $V_{GS} = 2.0$ V |
| Drain-Source Breakdown Voltage | V_{BR} | 125 | - | - | V_{DC} | $V_{GS} = -8$ V, $I_D = 41.6$ mA |
| RF Characteristics^{3,4} ($T_C = 25^\circ\text{C}$, $F_0 = 1.8$ GHz unless otherwise noted) | | | | | | |
| Small Signal Gain | G_{SS} | 17.75 | 20.0 | - | dB | $V_{DD} = 50$ V, $I_{DQ} = 1.2$ A, $P_{IN} = 10$ dBm |
| Power Gain | P_G | 15.05 | 16.0 | - | dB | $V_{DD} = 50$ V, $I_{DQ} = 1.2$ A, $P_{IN} = 38$ dBm |
| Power Output | P_{OUT} | 200 | 250 | - | W | $V_{DD} = 50$ V, $I_{DQ} = 1.2$ A, $P_{IN} = 38$ dBm |
| Drain Efficiency ⁵ | η | 60 | 69 | - | % | $V_{DD} = 50$ V, $I_{DQ} = 1.2$ A, $P_{IN} = 38$ dBm |
| Output Mismatch Stress | VSWR | - | - | 3 : 1 | Ψ | No damage at all phase angles, $V_{DD} = 28$ V, $I_{DQ} = 1.2$ A, $P_{OUT} = 200$ W CW |
| Dynamic Characteristics⁶ | | | | | | |
| Input Capacitance | C_{GS} | - | 29.3 | - | pF | $V_{DS} = 28$ V, $V_{GS} = -8$ V, $f = 1$ MHz |
| Output Capacitance | C_{DS} | - | 7.3 | - | pF | $V_{DS} = 28$ V, $V_{GS} = -8$ V, $f = 1$ MHz |
| Feedback Capacitance | C_{GD} | - | 0.61 | - | pF | $V_{DS} = 28$ V, $V_{GS} = -8$ V, $f = 1$ MHz |

Notes:

¹ Measured on wafer prior to packaging per side of device² Scaled from PCM data³ Measured in CGHV40200PP-TB⁴ I_{DQ} of 1.2 A is by biasing each device at 0.6 A⁵ Drain Efficiency = P_{OUT} / P_{DC} ⁶ Capacitance values are for each side of the device



Typical Performance

Figure 1. Gain and Return Losses vs Frequency measured in CGHV40200PP-TB
 $V_{DD} = 50\text{ V}$, $I_{DQ} = 1.2\text{ A}$, Freq = 1500 - 2000 MHz


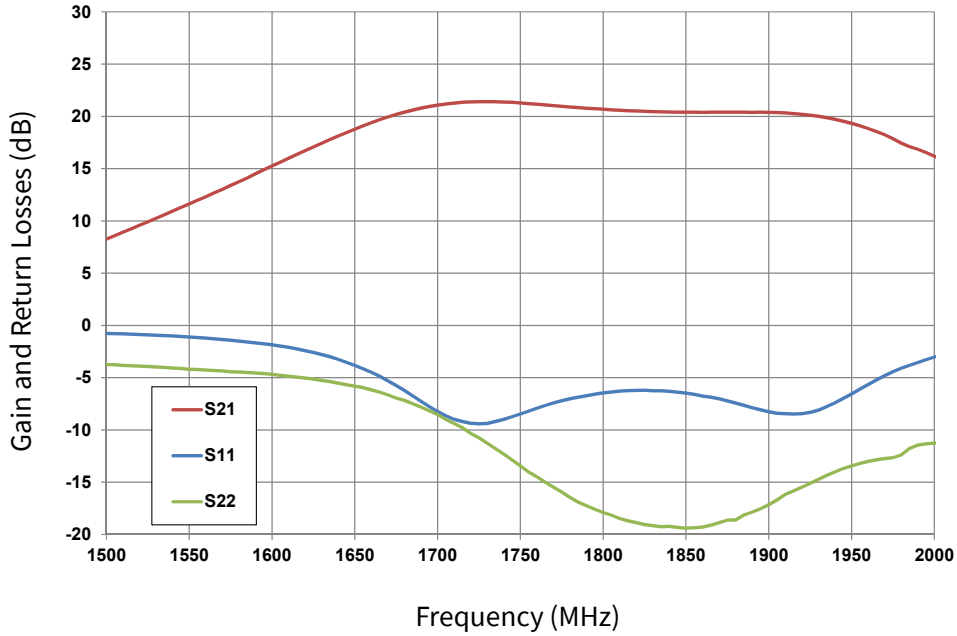


Figure 2. Output Power and Drain Efficiency vs Frequency measured in CGHV40200PP-TB
 CW Operation, $V_{DD} = 50\text{ V}$, $I_{DQ} = 1.2\text{ A}$, Output Power @ $P_{IN} = 38\text{ dBm}$



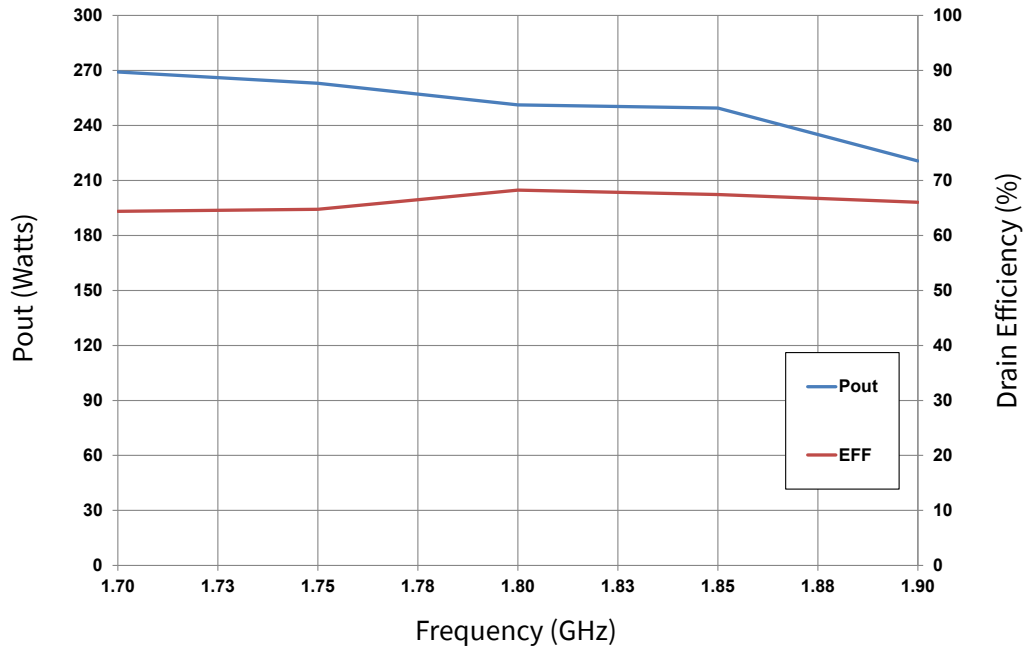

Typical Performance

Figure 3. Gain and Drain Efficiency vs Output Power measured in CGHV40200PP-TB
 CW Operation, $V_{DD} = 50\text{ V}$, $I_{DQ} = 1.2\text{ A}$


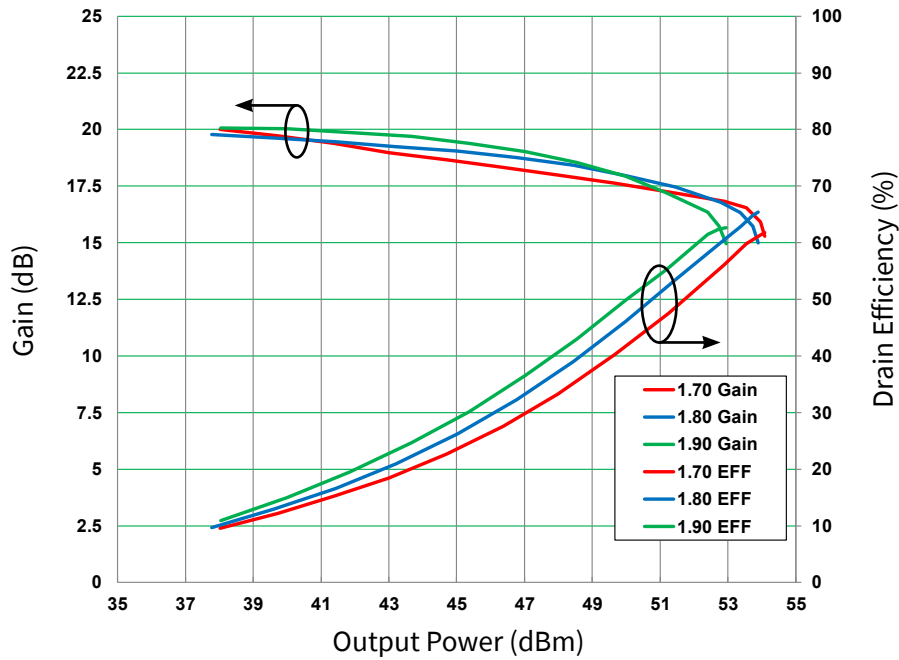


Figure 4. Simulated Maximum Available Gain and K-factor of the CGHV40200PP
 $V_{DD} = 50\text{ V}$, $I_{DQ} = 1.2\text{ A}$

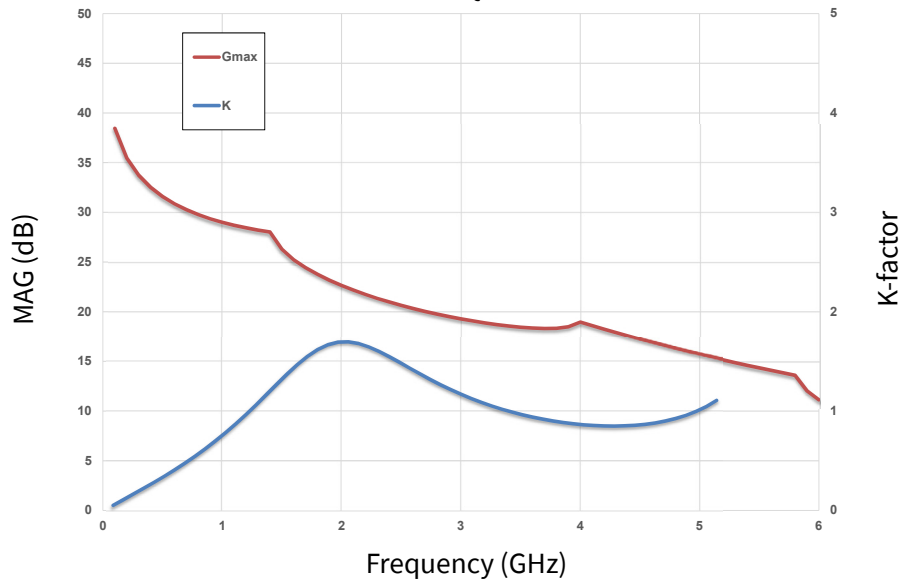

Electrostatic Discharge (ESD) Classifications

| Parameter | Symbol | Class | Test Methodology |
|---------------------|--------|------------|---------------------|
| Human Body Model | HBM | 1A > 250 V | JEDEC JESD22 A114-D |
| Charge Device Model | CDM | 1 < 200 V | JEDEC JESD22 C101-C |

CGHV40200PP-AMP1 Demonstration Amplifier Circuit Bill of Materials

| Designator | Description | Qty |
|-------------------------------------|---|-----|
| R1,2 | RES,1/4W,1206 1%, 0 OHM | 2 |
| R5, R6, R7,R11, R12, R13 | RES, 1/16W, 0603, 1%, 5.1 Ohms | 6 |
| R3, R4, R9, R10 | RES 5.1 OHM 1/8W 5% 0805 SMD | 4 |
| R15, R16, R17, R18 | RES SMD 10 OHM 1% 2W 2512 | 4 |
| R8,14 | RES SMD 150 OHM 5% 1W 2512 | 2 |
| C48,49 | CAP, 0.1PF, +/- 0.05pF, 0805, ATC, 600F | 2 |
| C16 | CAP, 0.8pF, +/-0.05pF, 0805, ATC | 1 |
| C27 | CAP, 1.2pF, +/-0.1pF, 0603, ATC | 1 |
| C24 | CAP, 1.2pF, +/-0.1pF, 0805, ATC | 1 |
| C15 | CAP, 1.0pF, +/-0.1pF, 0603, ATC | 1 |
| C26 | CAP, 1.5pF,+/-0.1pF, 0603, ATC | 1 |
| C25 | CAP, 2.0pF, +/-0.1pF, 0805, ATC | 1 |
| C17 | CAP, 3.9pF,+/-0.25pF, 0805, ATC | 1 |
| C28,29,36,37, 42, 46 | CAP, 5.1pF, +/-0.05pF, 0805, ATC600F | 4 |
| C5,6,38,39 | CAP, 5.6 PF +/- 0.1 pF, 0805, ATC 600F | 4 |
| C4,7,31,35 | CAP, 20PF ±5% 250V 0805, ATC600F | 4 |
| C32,33,44,47 | CAP, 100 PF +/- 5%, 250V, 0805, ATC 600F | 4 |
| C2,3,8,9,13,18,30, 34,40,41, 43, 45 | CAP, 1000PF, +/-10%, 0805, X7R, 100V, TEMP STBL | 12 |
| C1,11,14,19,22,23, | CAP, 10000PF, +/-10%, 0805, X7R, 100V, TEMP STBL | 6 |
| C21 | CAP, 0.1uF, +/-10%, 250V, 1206, X7R | 1 |
| C10,12 | CAP CER 10UF 25V X7R 1206 | 2 |
| C20 | CAP, 330 UF, +/-20%, 100V, ELECTROLYTIC, CASE SIZE K16 | 1 |
| L6,7, 9,10,12, 13 | IND, 12NH, 2%, 0908SQ-12NGL | 6 |
| L2, 3 | IND, 27NH, 2%, 0908SQ-27NGL | 2 |
| L11 | CABLE ,18 AWG, 4.2" | 1 |
| L1,4 | FERRITE BEAD 600 OHM 0603 1LN | 2 |
| L5,8 | FERRITE BEAD 72 OHM 1806 1LN | 2 |
| J2,3 | CONN, SMA, PANEL MOUNT JACK, FLANGE, 4-HOLE, BLUNT POST | 2 |
| J1 | HEADER RT>PLZ .1CEN LK 9POS | 1 |
| J4,5 | CONN SMA JACK STR 50 OHM SMD | 2 |
| | PCB, Rogers 6035HTC 0.020" THK, CGHV40200PP 1.35-1.85 GHz | 1 |
| | BASEPLATE, AL, 4.80 X 3.60 X 0.49, ALTERNATE HOLE PATTERN | 1 |
| | 2-56 SOC HD SCREW 1/4 SS | 4 |
| | #2 SPLIT LOCKWASHER SS | 4 |
| | CGHV40200PPP | 1 |



CGHV40200F Typical Performance

Figure 5. Small Signal Gain and Return Losses vs Frequency measured in the CGHV40200PP-AMP1 Broadband Amplifier Circuit
 $V_{DD} = 50\text{ V}, I_{DQ} = 1.2\text{ A}$



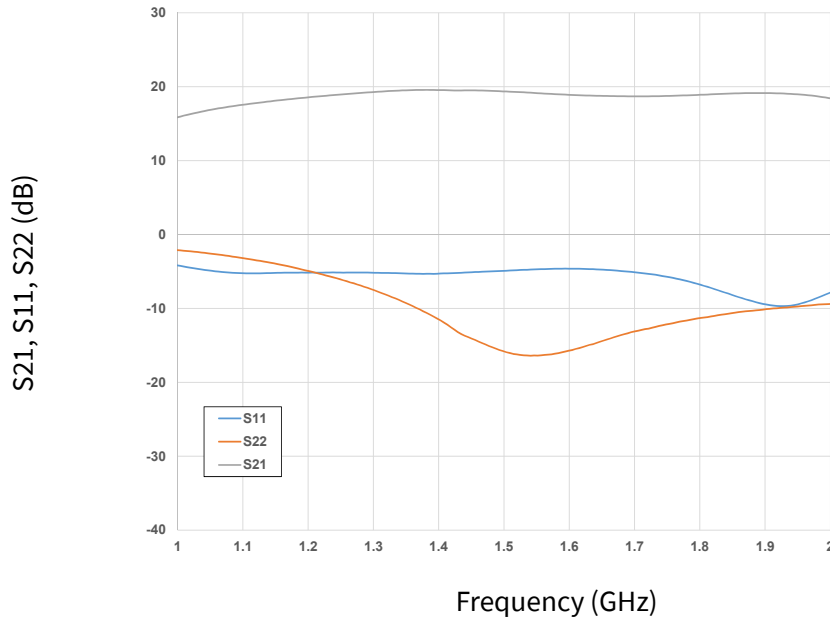



Figure 6. Saturated Output Power Gain, and Drain Efficiency vs Frequency of the CGHV40200PP measured in the CGHV40200PP-AMP1 Broadband Amplifier Circuit
 $V_{DD} = 50\text{ V}, I_{DQ} = 1\text{ A}, CW, P_{SAT}, I_G = 0\text{ mA}$

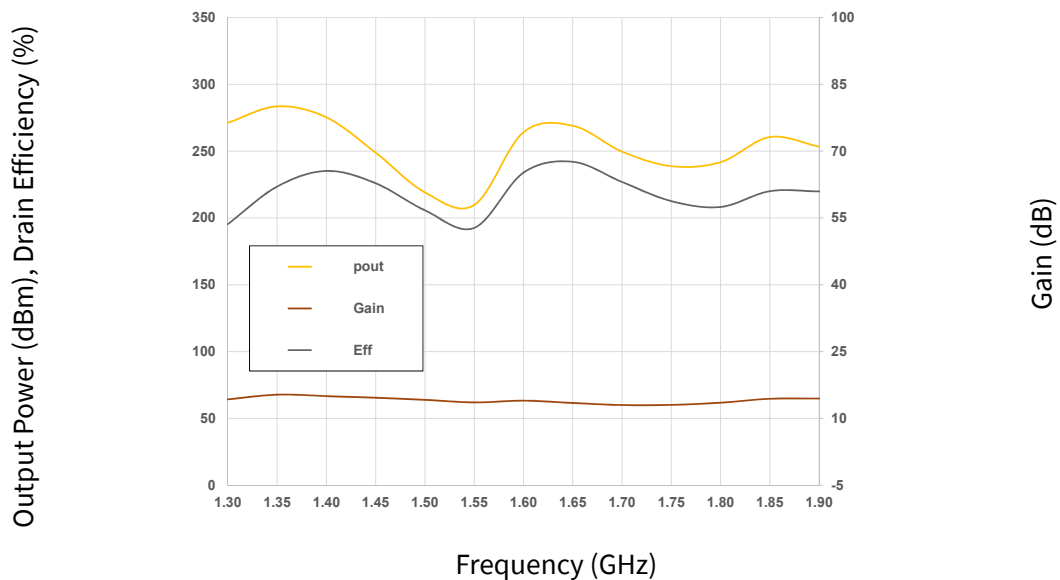

CGHV40200PP-AMP1 Demonstration Amplifier Circuit Schematic

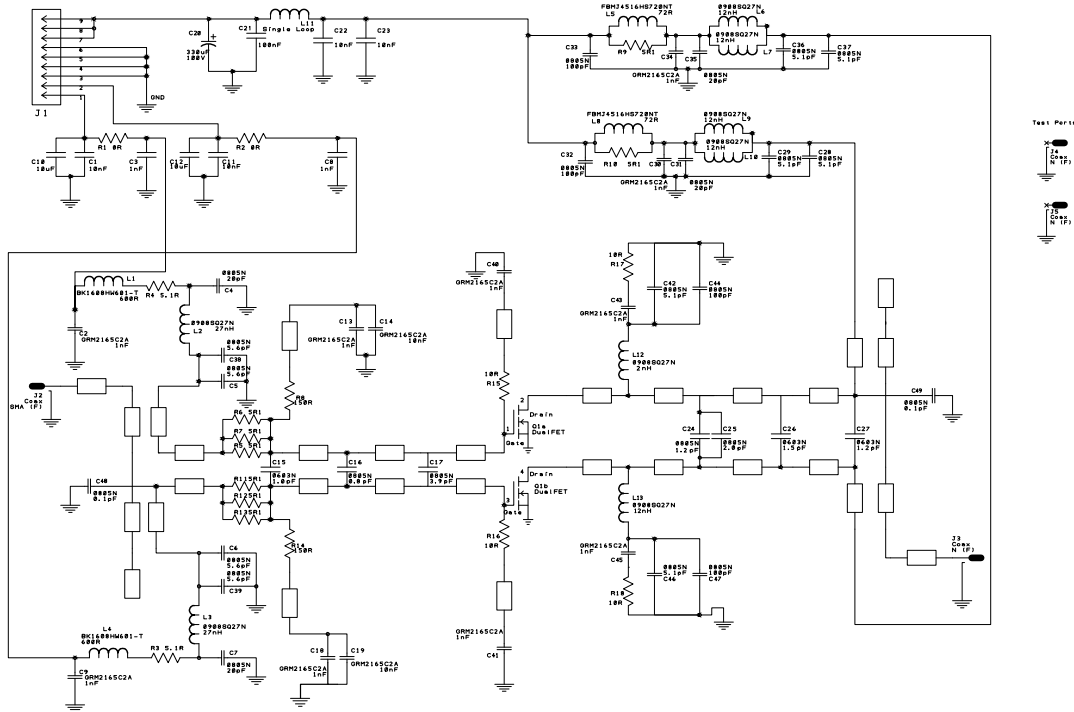


CGHV40200PP-AMP1 Demonstration Amplifier Circuit Outline

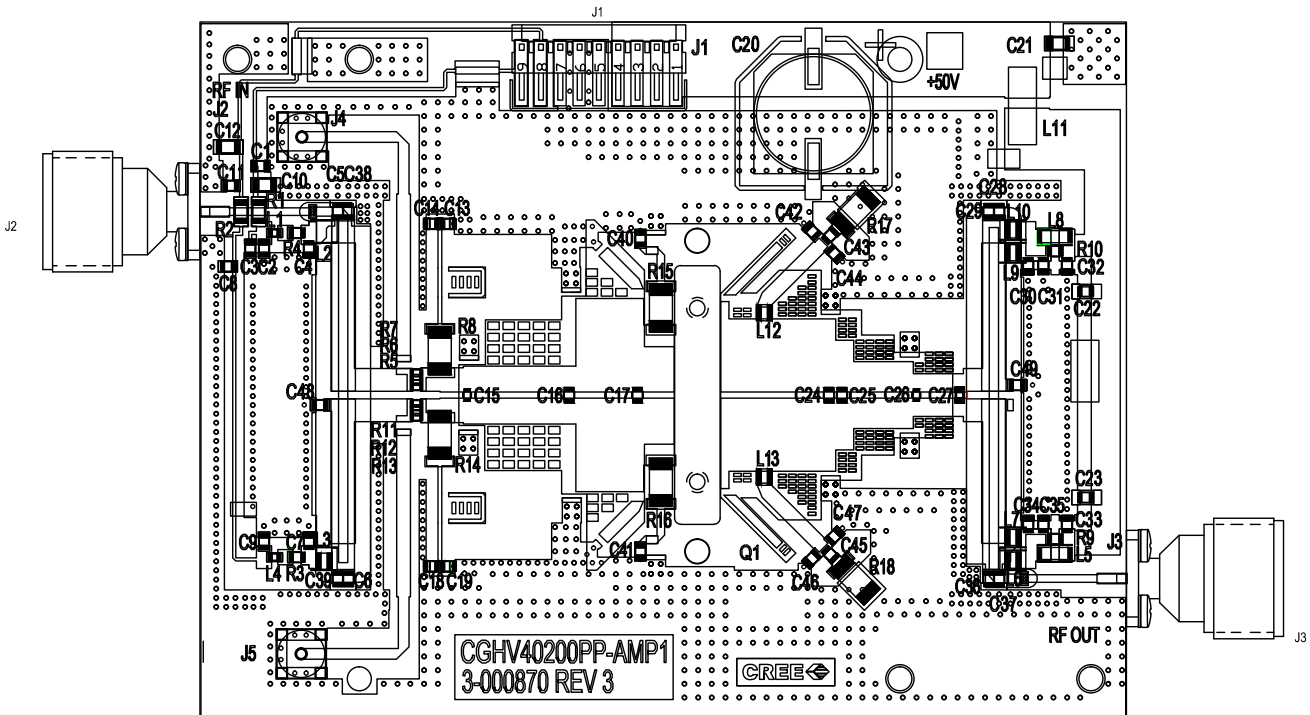




Simulated Source and Load Impedances

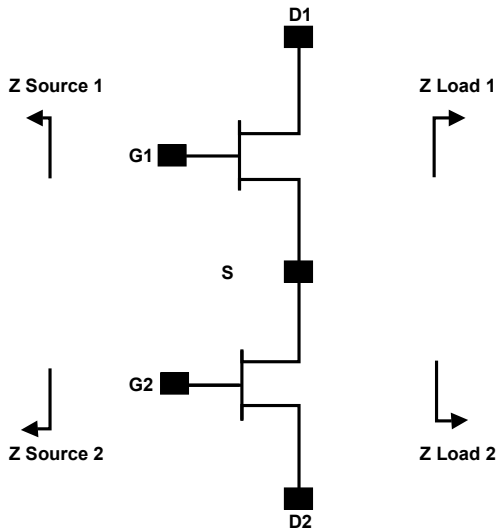

| Frequency (MHz) | Z Source (1,2) | Z Load (1,2) |
|-----------------|----------------|--------------|
| 500 | 2.9 +j4.8 | 12.8 +j7.3 |
| 1000 | 0.8 +j1.5 | 9.1 +j5.1 |
| 1500 | 0.9 +j0.6 | 5.5 +j3.8 |
| 2000 | 1.1 -j2.2 | 4.4 +j2.0 |
| 2500 | 1.8 -j4.0 | 3.8 +j0.5 |

Note 1. $V_{DD} = 50\text{ V}$, $I_{DQ} = 2 \times 0.6\text{ A}$ in the 440199 package
 Note 2. Optimized for power gain, P_{SAT} and PAE
 Note 3. When using this device at low frequency, series resistors should be used to maintain amplifier stability


CGHV40200PP Power Dissipation De-rating Curve

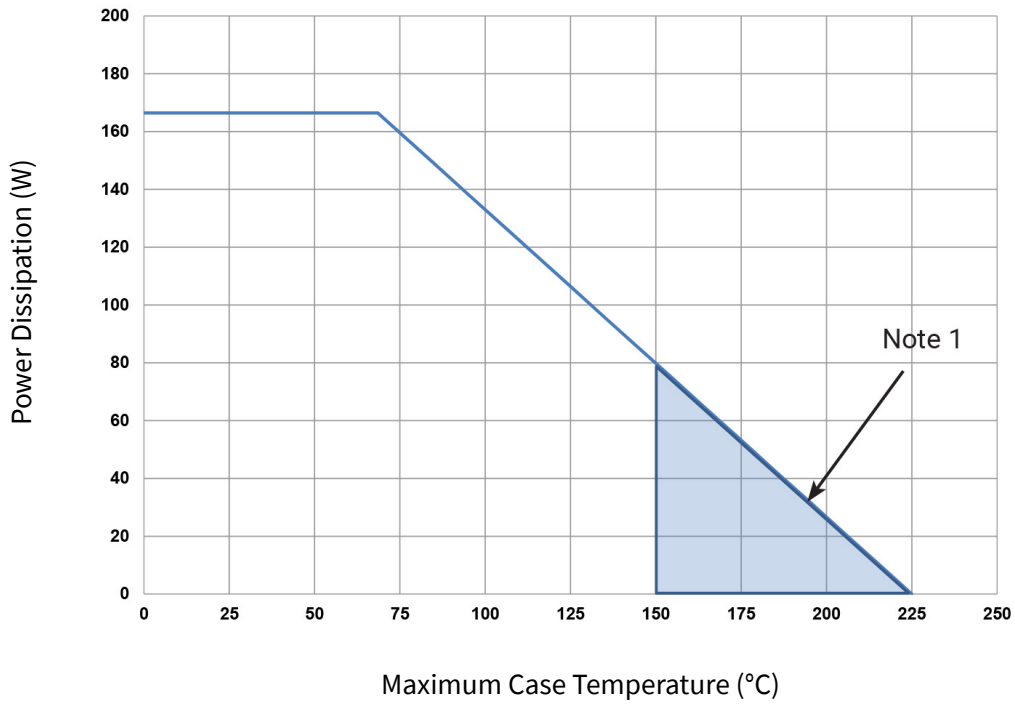

Note 1. Area exceeds Maximum Case Operating Temperature (See Page 2)



Product Dimensions CGHV40200PP (Package Type 440199)

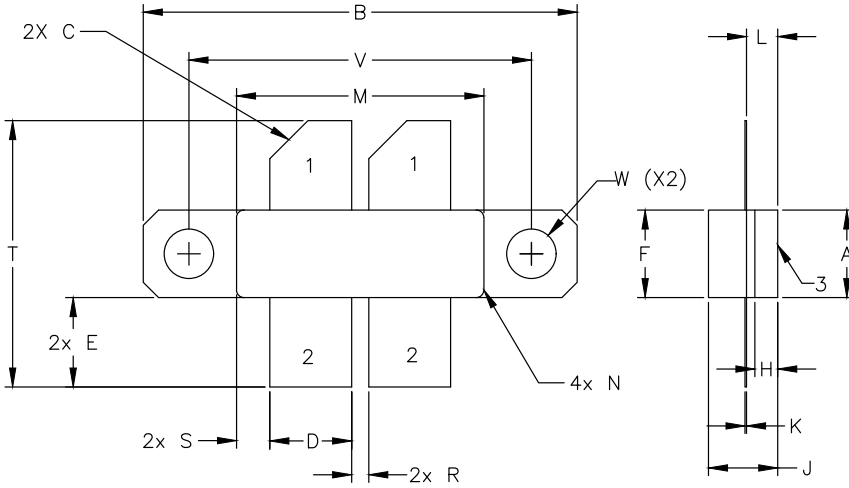

| DIM | INCHES | | MILLIMETERS | |
|-----|-----------|---------|-------------|---------|
| | MIN | MAX | MIN | MAX |
| A | 0.225 | 0.235 | 5.72 | 5.97 |
| B | 1.135 | 1.145 | 28.83 | 29.00 |
| C | 0.10 | 45° REF | 2.54 | 45° REF |
| D | 0.210 | 0.220 | 5.33 | 5.59 |
| E | 0.230 | 0.240 | 5.84 | 6.00 |
| F | 0.225 | 0.235 | 5.71 | 5.97 |
| H | 0.055 | 0.065 | 1.40 | 1.65 |
| J | 0.174 | 0.208 | 3.87 | 4.37 |
| K | 0.003 | 0.006 | 0.08 | 0.15 |
| L | 0.075 | 0.085 | 1.91 | 2.16 |
| M | 0.643 | 0.657 | 16.30 | 16.70 |
| N | R.010 REF | | R0.51 REF | |
| R | 0.040 | 0.050 | 1.00 | 1.27 |
| S | 0.083 | 0.093 | 2.10 | 2.36 |
| T | 0.680 | 0.720 | 17.30 | 18.30 |
| V | 0.895 | 0.905 | 22.70 | 22.98 |
| W | ø.130 | | ø 3.30 | |



Part Number System

CGHV40200PP

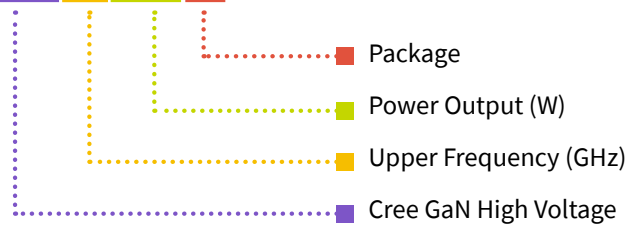


Table 1.

| Parameter | Value | Units |
|------------------------------|-----------|-------|
| Upper Frequency ¹ | 2.5 | GHz |
| Power Output | 200 | W |
| Package | Push Pill | - |

Note¹: Alpha characters used in frequency code indicate a value greater than 9.9 GHz. See Table 2 for value

Table 2.

| Character Code | Code Value |
|----------------|--------------------------------|
| A | 0 |
| B | 1 |
| C | 2 |
| D | 3 |
| E | 4 |
| F | 5 |
| G | 6 |
| H | 7 |
| J | 8 |
| K | 9 |
| Examples: | 1A = 10.0 GHz 2H = 27.0 GHz |



Product Ordering Information

| Order Number | Description | Unit of Measure | Image |
|------------------|------------------------------------|-----------------|-------|
| CGHV40200PP | GaN HEMT | Each | |
| CGHV40200PP-AMP1 | Test board with GaN HEMT installed | Each | |



For more information, please contact:

4600 Silicon Drive
Durham, North Carolina, USA 27703
www.wolfspeed.com/RF

Sales Contact
RFSales@wolfspeed.com

RF Product Marketing Contact
RFMarketing@wolfspeed.com

Notes

Disclaimer

Specifications are subject to change without notice. Cree, Inc. believes the information contained within this data sheet to be accurate and reliable. However, no responsibility is assumed by Cree for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Cree. Cree makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. “Typical” parameters are the average values expected by Cree in large quantities and are provided for information purposes only. These values can and do vary in different applications and actual performance can vary over time. All operating parameters should be validated by customer’s technical experts for each application. Cree products are not designed, intended or authorized for use as components in applications intended for surgical implant into the body or to support or sustain life, in applications in which the failure of the Cree product could result in personal injury or death or in applications for planning, construction, maintenance or direct operation of a nuclear facility.