




ECP5 Versa Evaluation Board

User Guide

Introduction

The ECP5™ Versa Evaluation Board allows designers to investigate and experiment with the features of the ECP5 Field-Programmable Gate Array. The features of the ECP5 Versa Evaluation Board can assist engineers with rapid prototyping and testing of their specific designs. The ECP5 Versa Evaluation Board is part of the ECP5 Versa Development Kit. The guide is intended to be referenced in conjunction with demo user's guides to demonstrate the ECP5 FPGA.

Figure 1. ECP5 Versa Evaluation Board, Top Side

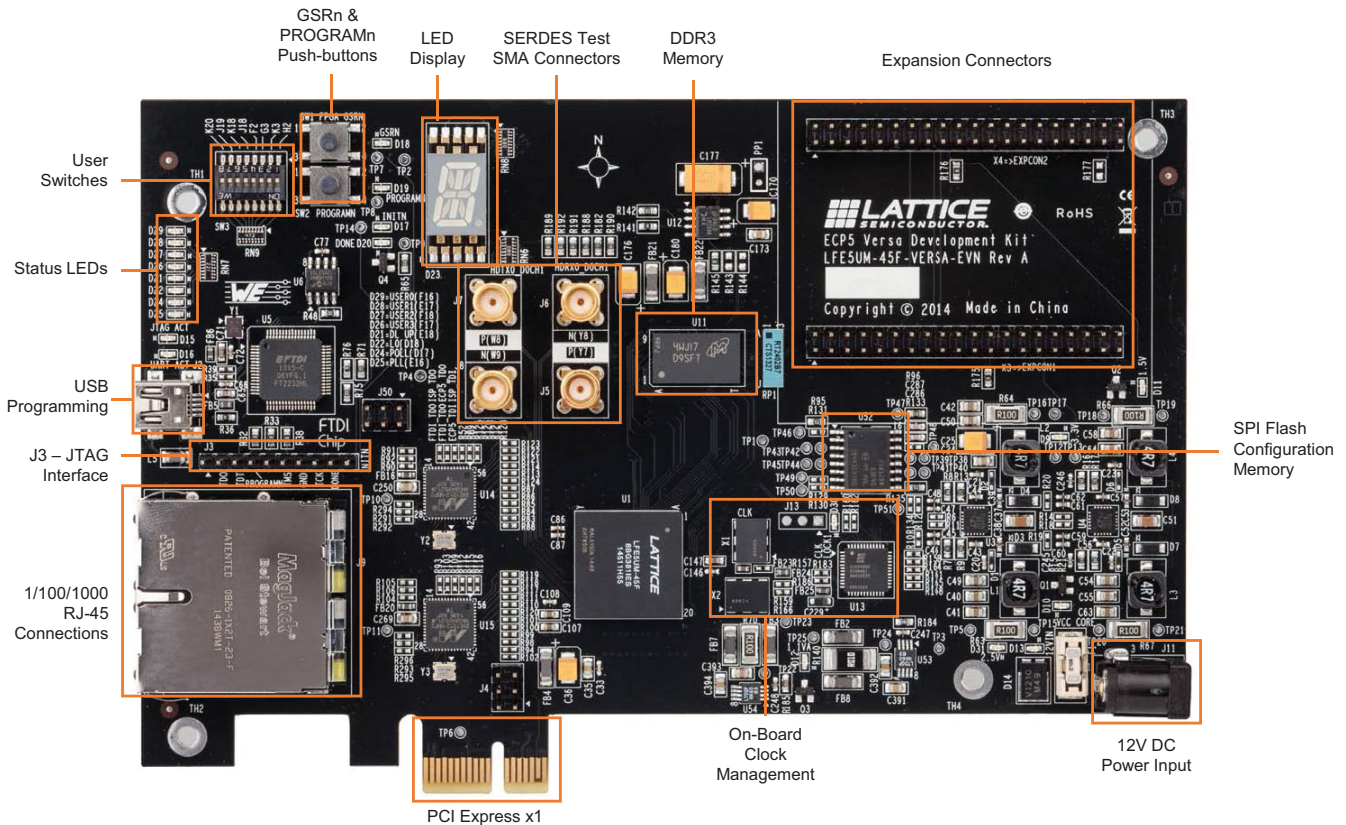

Features

- Half-length PCI Express form-factor
 - Allows demonstration of PCI Express x1 interconnection
- Electrical testing of one full-duplex SERDES channel via SMA connections
- USB-B connection for UART and device programming
- Two RJ45 interfaces to 10/100/1000 Ethernet to RGMII
- On-board Boot Flash
 - 128M Serial SPI Flash
- DDR3-1866 memory components (64Mb/x16)
- Expansion mezzanine interconnection for prototyping
- 14-segment alpha-numeric display
- Switches, LEDs and displays for demo purposes
- Diamond® programming support
- On-board reference clock sources

The contents of this user's guide include top-level functional descriptions of the various portions of the evaluation board, descriptions of the on-board connectors, diodes and switches and a complete set of schematics.

Caution: The ECP5 Versa Evaluation Board contains ESD-sensitive components. ESD safe practices should be followed while handling and using the evaluation board.

ECP5 Device

This board features an ECP5 FPGA with a 1.1 V core supply. It can accommodate all pin-compatible ECP5 devices in the 381 ball caBGA package. A complete description of this device can be found in DS1044, [ECP5 Family Data Sheet](#).

*Note: The connections referenced in this document refer to the **LFE5UM-45F-8BG381C** device.*

Applying Power to the Board

The ECP5 Versa Evaluation Board is ready to power on. The board can be supplied with power from a PCI Express host system or standalone with an external wall power module.

The 12 V DC input power source is fused with a surface mounted fuse, as noted in Table 1.


Table 1. Board Power Supply Fuses (See Appendix A, Sheet 2, Figure 11- Voltage Regulators)

Fuse Designator	Description
F1	12 V Input Supply Fuse

The board may be plugged into a host PC. Only plug the board into a PCI Express slot when the system is powered off. Once inserted, the PC can be safely powered on.

Using the evaluation board outside of a PC chassis supply requires the factory-supplied wall supply module. Use of other supplies is not suggested.

Figure 2. Power Distribution Scheme (See Appendix A, Sheet 2, Figure 11- Voltage Regulators)

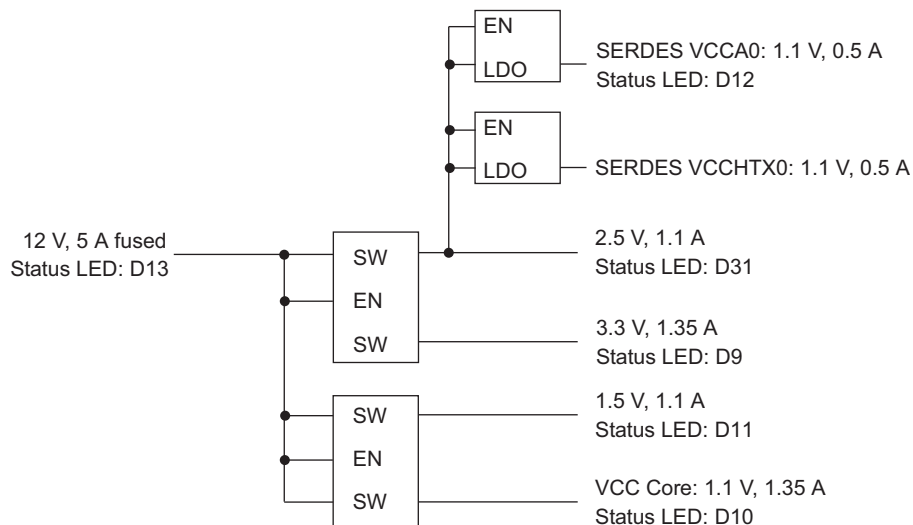

Programming/FPGA Configuration

The ECP5 Versa Evaluation Board has a built-in download controller for programming the ECP5 FPGA. The built-in module consists of a USB Type-B connector and a USB UART device. To use the built-in download cable, simply connect a standard USB cable (a USB-B to USB-A cable is included with the ECP5 Versa Development Kit) from J2 to your PC (with Diamond programming software installed). The USB hub on the PC will detect the addition of the USB function, making the built-in cable available for use with the Diamond programming software. The USB cable is connected in parallel to J3.

Alternate Programmer Download Interface

J3 is a 10 pin JTAG connector that is provided for use with an external Lattice download cable (available separately). A USB download cable can be attached to the board using J3 to interface with the FPGA (U1).

Note: Resistors R38, R33, R32 and R36 need to be removed.

The same interface can be used to access the ispClock 5406D clock device (U13) by reconfiguring the jumpers on J50 (See Appendix A, Sheet 3, Figure 12 - Programming). U13 is factory-programmed for use with the reference designs and should only be altered for customized designs.

Table 2. JTAG Connector Pinout (J3) (See Appendix A, Sheet 3, Figure 12 - Programming)

Pin	Function	Color
1	PWR	Red
2	TDO	Brown
3	TDI	Orange
4	PROGRAMn	Yellow
5	N/C	—
6	TMS	Purple
7	GND	Black
8	TCK	White
9	DONE	Green
10	INITn	Blue

Diamond Programmer Requirements

Note: This board includes the built-in download module and only requires the USB cable included with the board. After initial board setup, use the following procedure to program the board. Instructions assume that Diamond Programmer software has been installed on a local PC.

Requirements:

- PC with Diamond Programmer 3.2 (or later) programming software, installed with appropriate drivers (USB driver for USB cable).

Note: An option to install these drivers is included as part of the Diamond Programmer setup.

Board Programming

Configuration Status Indicators

(See Appendix A, Sheet 3, Figure 12 - Programming)

Figure 3. ECP5 Status LEDs and Push-button Controls



The LEDs indicate the configuration status of the ECP5 FPGA.

- **D17 (red)** illuminated indicates that programming was aborted or reinitialized, driving the INITN output low.
- **D20 (green)** illuminated indicates the successful completion of configuration by releasing the open collector DONE output pin.
- **D19 (red)** illuminated indicates that PROGRAMN is low.
- **D18 (red)** illuminated indicates that GSRN is low.

PROGRAMN and GSRN

These push-button switches assert/de-assert the logic levels on PROGRAMN (SW2) and GSRN (SW1). Depressing the button drives a logic level “0” to the device.


Programming Serial SPI Flash Memory

A serial SPI (16-pin TSSOP, 128M) Flash memory device (U52) is on-board for non-volatile configuration memory storage. A Micron N25Q128A device is populated on-board.

The Serial SPI Flash memory device can be configured easily via the ECP5 JTAG port. This mode enables the FPGA to be programmed at power-up or assertion of PROGRAMN with a bitstream stored in the memory device.


1. Connect the ECP5 Versa Evaluation Board.
2. Scan the board or select the **LFE5UM-45F** device in the ECP5UM device family.
3. From the Edit pull down menu select **Device Properties**. Set the Access mode to **SPI Flash Background Programming** and Operation to **SPI Flash Erase, Program, Verify**.

Figure 4. Diamond Programmer Main Screen

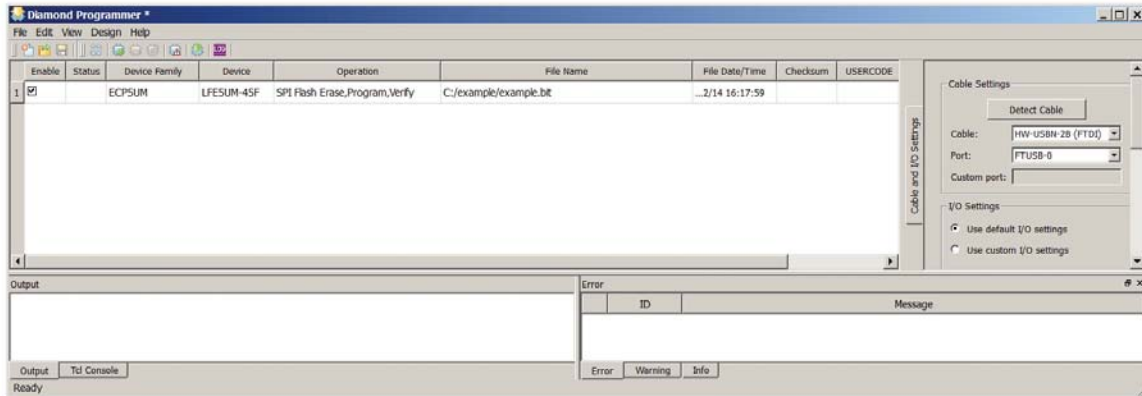

- Under the SPI Flash Options, select Family to **SPI Serial Flash**, Vendor to **Micron**, Device to **SPI-N25Q128A**, Package to **16-pin SOIC**.

Figure 5. Device Properties Dialog Box

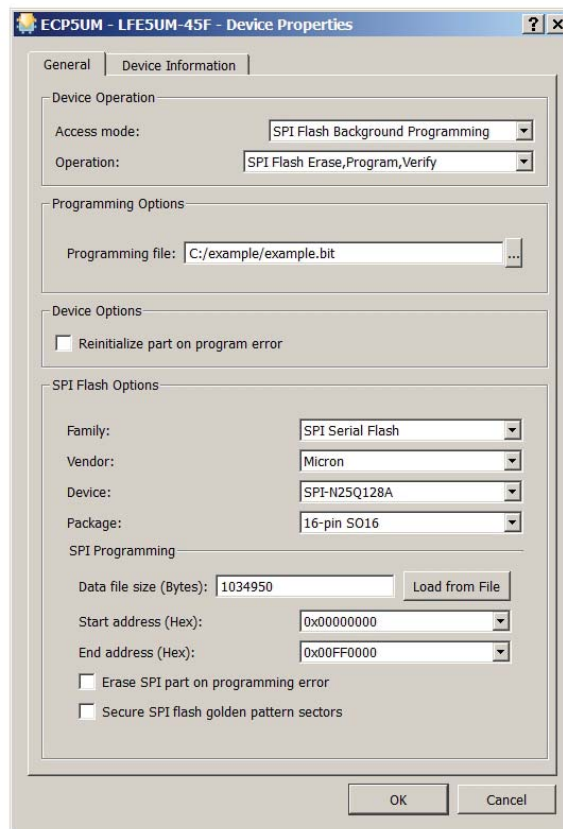


- Click **OK** in the Device Properties dialog box. You will return to the main configuration screen.
- Set J50 jumper to ECP5 programming (See Appendix A, sheet 3 "Programming")
- From the main programming window, select **Program** from the top toolbar. This begins the SPI Serial Flash programming.

On-Board Clock Capabilities

(See Appendix A, Sheet 9, Figure 18 - Reference Clock Generator)

The ECP5 Versa Evaluation Board allows for several clock source options. Some of these options are controlled via the ispClock5406D programmable clock manager device. The ispClock5406D enables the reference clock from the PCI Express interface to provide a reference clock to the SERDES. This is true only when the board is in a PCI Express host socket. When the board is not in a PCI Express host socket, the clock will be supplied by a 156.25 MHz clock on-board oscillator. Both clock inputs can be fanned out to the dedicated SERDES reference inputs, FPGA inputs, and to the expansion connectors. The factory default programming only connects the SERDES reference clock inputs. Factory-defined demonstration designs will control and manage the clock.

Figure 6. Clock Controller Scheme

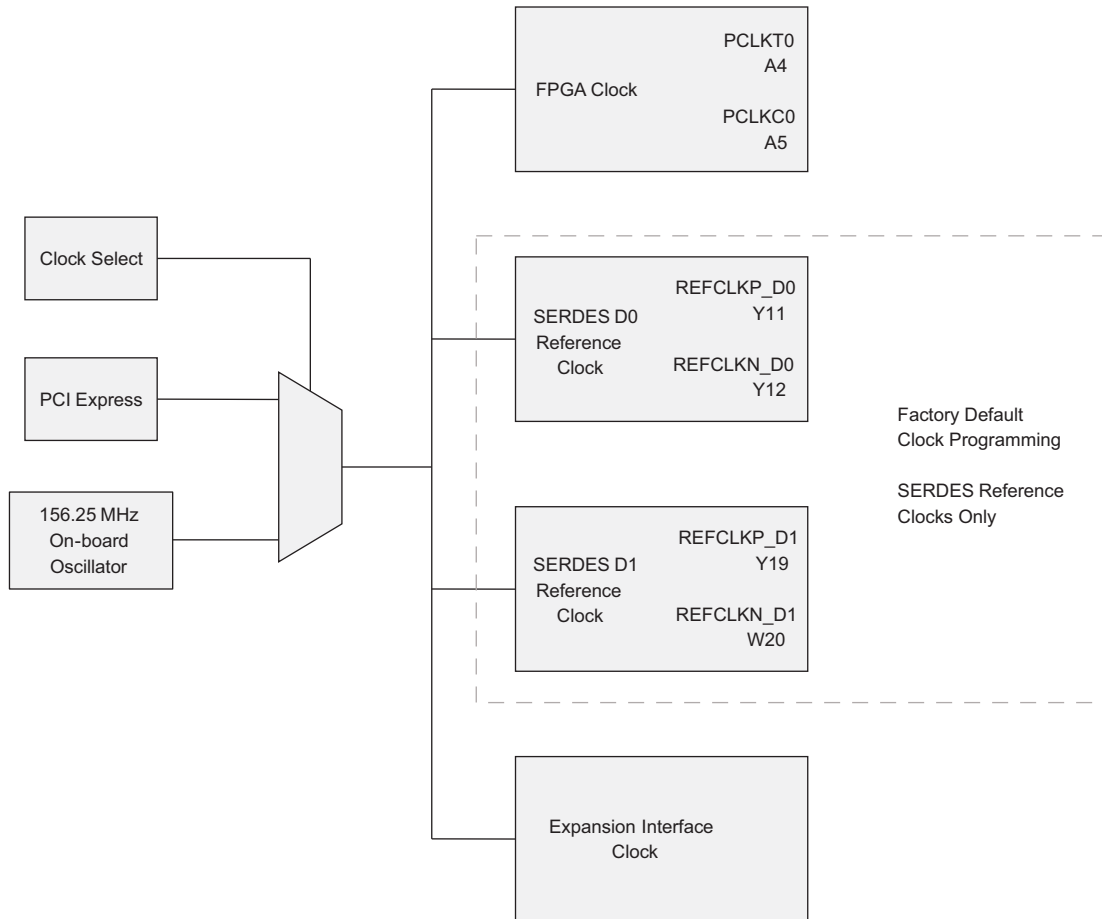


General Purpose Clock Source

An on-board 100 MHz LVDS oscillator is provided for general purpose use. This clock source is connected to differential inputs P3 and P4 and must be used as LVDS inputs to the FPGA. This pin pair also provides optimal interface to the FPGA PLL for customized use.

The PCI Express add-in card specification requires add-in boards to include capabilities to tell the host of its presence. The ECP5 Versa Evaluation Board allows this optional connection via a board jumper. The factory default will have two jumpers installed as shown below for the PRSNT connection to the PCI Express host.

Figure 7. PCI Express PRSNT Control Connection

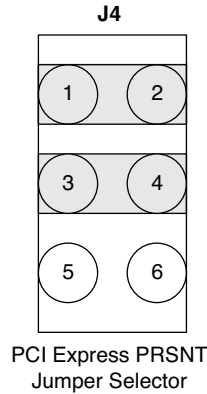

SERDES

The ECP5 quad-based SERDES FPGA is utilized on the board for several purposes. The PCSA quad is provisioned to provide a single, full-duplex PCI Express channel. The high-speed signals are connected to the PCI Express edge connection.

Table 3. PCI Express Channel Interconnections

Signal Name	SERDES Port	FPGA Ball Number
PETp0	HDRXP0_D0CH0	Y5
PETn0	HDRXN0_D0CH0	Y6
PERp0	HDTXP0_D0CH0	W4
PERn0	HDTXN0_D0CH0	W5

Table 4. SMA Test Interconnections

Connector	SERDES Port	FPGA Ball Number
J5	HDRXP0_D0CH1	Y7
J6	HDRXN0_D0CH1	Y8
J7	HDTXP0_D0CH1	W8
J8	HDTXN0_D0CH1	W9


FPGA Test Pins

(See Appendix A, Sheet 8, Figure 17 - LEDs and Switches)

General Purpose DIP Switches

General purpose FPGA pins are available for user applications. FPGA pins are connected to switch SW3, a SPST slide-actuated DIP switch. The switches are connected to logic level 0 when moved to the ON position. Switch position 1 is indicated with an arrow. *Inputs 1-4 are within a 1.5 V bank and inputs 5-8 are within a 2.5 V bank.* The user must program inputs 1-4 to be the LVCMOS15 type and inputs 5-8 to be the LVCMOS25 type in the design.

Figure 8. ECP5 Versa Evaluation Board LEDs and Switches

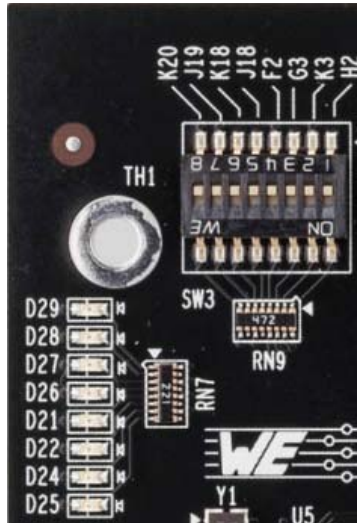

The designated pins are connected according to Table 5.

Table 5. FPGA Ball to DIP Switch Position

FPGA Ball Number	SW3 DIP Switch Position
H2	1
K3	2
G3	3
F2	4
J18	5
K18	6
J19	7
K20	8

General Purpose LEDs

(See Appendix A, Sheet 8, Figure 17 - LEDs and Switches)

The LEDs provided on the ECP5 Versa Evaluation Board are connected to general purpose FPGA I/Os. These LEDs provide status for user designs and must be included in the design. The LEDs illuminate when the FPGA output is driven LOW. Table 6 shows the LED and associated FPGA pins. These pins are within an I/O bank connected to 2.5 V and the user should program these to be LVCMOS25 type outputs in the design.

Table 6. LED Definitions

LED Number	FPGA Ball Number	PCB Designator	LED Color
LED0	E18	D21	Green
LED1	D18	D22	Green
LED2	D17	D24	Yellow
LED3	E16	D25	Yellow
LED4	F17	D26	Red
LED5	F18	D27	Red
LED6	F16	D29	Red
LED7	E17	D28	Red

Alpha-numeric LED Display

(See Appendix A, Sheet 8, Figure 17 - LEDs and Switches)

A 14-segment alpha-numeric display is provided on the board (D23). These LED segments are connected to general-purpose FPGA I/Os. The LEDs must be included in the FPGA design. The LEDs illuminate when the FPGA output is driven LOW. Table 7 shows the LED and associated FPGA pins. These pins are within an I/O bank connected to 2.5 V and the user should program these to be LVCMOS25 outputs in the design.

Figure 9. 14-Segment Display




Table 7. Alpha-numeric LED Definitions

Display	FPGA Ball Number	Display	FPGA Ball Number
A	M20	J	N18
B	L19	K	P17
C	M19	L	N17
D	L16	M	P16
E	L17	N	R16
F	M18	P	R17
G	N16	DP	U1
H	M17		

DDR3 Memory Device

(See Appendix A, Sheet 7, Figure 16 - DDR3 Memory)

- The ECP5 Versa Evaluation Board is equipped with an SDRAM memory device (1.5 V, 64 Mb/x16, 96-ball FBGA, 933 MHz, DDR3-1866) such as the Micron MT41K64M16TW-107:J device.
- The DDR3 memory includes a 16-bit wide memory controller interface.
- The board includes termination of data, address and command signals. It includes all power and external components needed to demonstrate the memory controller of the ECP5 device.
- A 100 MHz on-board clock oscillator is available to provide a DDR3 reference clock.

Table 8. DDR3 Memory Controller Interconnections

DDR3 Signal	FPGA Ball Number
DQ0	L5
DQ1	F1
DQ2	K4
DQ3	G1
DQ4	L4
DQ5	H1
DQ6	G2
DQ7	J3
DQ8	D1
DQ9	C1
DQ10	E2
DQ11	C2
DQ12	F3
DQ13	A2
DQ14	E1
DQ15	B1
DQS0	K2
DQS0#	J1
DQS1	H4
DQS1#	G5
CE0	N2
RAS#	P1
CLKP	P3
CLKN	P4
RST#	N4

DDR3 Signal	FPGA Ball Number
A0	P2
A1	C4
A2	E5
A3	F5
A4	B3
A5	F4
A6	B5
A7	E4
A8	C5
A9	E3
A10	D5
A11	B4
A12	C3
K_0	M4
K_0#	N5
CAS#	L1
BA0	P5
BA1	N3
BA2	M3
ODT	L2
CS0#	K1
WE#	M1
VREF	K5
DM0	J4
DM1	H5

Ethernet Interfaces

(See Appendix A, sheets 5 and 6 "10/100/1000-T PHY#x/RJ45")

Two Marvell 88E1512 Gigabit Ethernet transceiver devices (U14 and U15) are included on the board. This physical layer device supports 1000BASE-T, 100BASE-TX, and 10BASE-T applications via a standard media interface to a dual RJ45 connection. The RJ45 connection includes network magnetics providing the proper signal conditioning, electro-magnetic interference suppression and signal isolation. Each connector includes two LEDs which are controlled by the 88E1512 devices. Detailed descriptions are available in the Marvell device data sheet.

Table 9. PHY Status Indicators

LED	Status Description
RJ45 (Yellow)	Data RX/TX
RJ45 (Green/Orange)	Link State

Each Marvell 88E1512 device communicates via a RGMII interface to the ECP5 device.

Table 10. FPGA GPIO to RGMII Interfaces

Signal	Phy1	Phy2
CLK125	L18	J20
CLK125Pll	U16	C18
Config	T17	G20
Resethn	U17	F20
TXCLK	P19	C20
TX_D0	N19	J17
TX_D1	N20	J16
TX_D2	P18	D19
TX_D3	P20	D20
TXCTRL	R20	E19
RXCLK	L20	K19
RX_D0	T20	G18
RX_D1	U20	G16
RX_D2	T19	H18
RX_D3	R18	H17
RXCTRL	U19	F19
MDIO	U18	H20
MDC	T18	G19

Table 11. Expansion Connections

X3 Expansion Connector		
Pin	Signal	FPGA Ball Number
1	GND	-
2	NC	-
3	2V5	-
4	IO29	B19
5	IO30	B12
6	IO31	B9
7	IO32	E6
8	IO33	D6
9	IO34	E7
10	IO35	D7
11	IO36	B11
12	IO37	B6
13	IO38	E9
14	IO39	D9
15	IO40	B8
16	IO41	C8
17	IO42	D8
18	IO43	E8
19	IO44	C7
20	IO45	C6
21	5VIN	-
22	GND	-
23	2V5	-
24	GND	-
25	3V3	-
26	GND	-
27	3V3	-
28	GND	-
29	OSC	-
30	GND	-
31	CLKIN	A10
32	GND	-
33	CLKOUT	E11
34	GND	-
35	3V3	-
36	GND	-
37	3V3	-
38	GND	-

X4 Expansion Connector		
Pin	Signal	FPGA Ball Number
1	RESOUT#	A8
2	GND	-
3	IO0	A12
4	IO1	A13
5	IO2	B13
6	IO3	C13
7	IO4	D13
8	IO5	E13
9	IO6	A14
10	IO7	C14
11	IO8	D14
12	IO9	E14
13	IO10	D11
14	IO11	C10
15	IO12	A9
16	IO13	B10
17	IO14	D12
18	IO15	E12
19	GND	-
20	3V3	-
21	IO16	B15
22	GND	-
23	IO17	C15
24	GND	-
25	IO18	D15
26	GND	-
27	IO19	E15
28	IO20	A16
29	IO21	B16
30	GND	-
31	IO22	C16
32	IO23	D16
33	IO24	B17
34	GND	-
35	IO25	C17
36	IO26	A17
37	IO27	B18
38	CARDSEL#	A7


X3 Expansion Connector		
Pin	Signal	FPGA Ball Number
39	3V3	-
40	GND	-

X4 Expansion Connector		
Pin	Signal	FPGA Ball Number
39	IO28	A18
40	GND	-

References

- DS1044, [ECP5 Family Data Sheet](#)
- QS021, [ECP5 PCI Express Development Kit Quick Start Guide](#)
- UG72, [PCI Express Demos for the ECP5 PCI Express Board](#)
- UGXX, [DDR3 Demo for the ECP5 Versa Evaluation Board](#)
- UGXX, [SERDES Eye/Backplane Demo for the ECP5 Versa Evaluation Board](#)

Ordering Information

Description	Ordering Part Number	China RoHS Environment-Friendly Use Period (EFUP)
ECP5 Versa Evaluation Board	LFE5UM-45F-VERSA-EVN	

Technical Support Assistance

e-mail: techsupport@latticesemi.com

Internet: www.latticesemi.com

Revision History

Date	Version	Change Summary
March 2015	1.0	Initial release.

© 2015 Lattice Semiconductor Corp. All Lattice trademarks, registered trademarks, patents, and disclaimers are as listed at www.latticesemi.com/legal. All other brand or product names are trademarks or registered trademarks of their respective holders. The specifications and information herein are subject to change without notice.

Appendix A. Schematics

Figure 10. Board Block Design

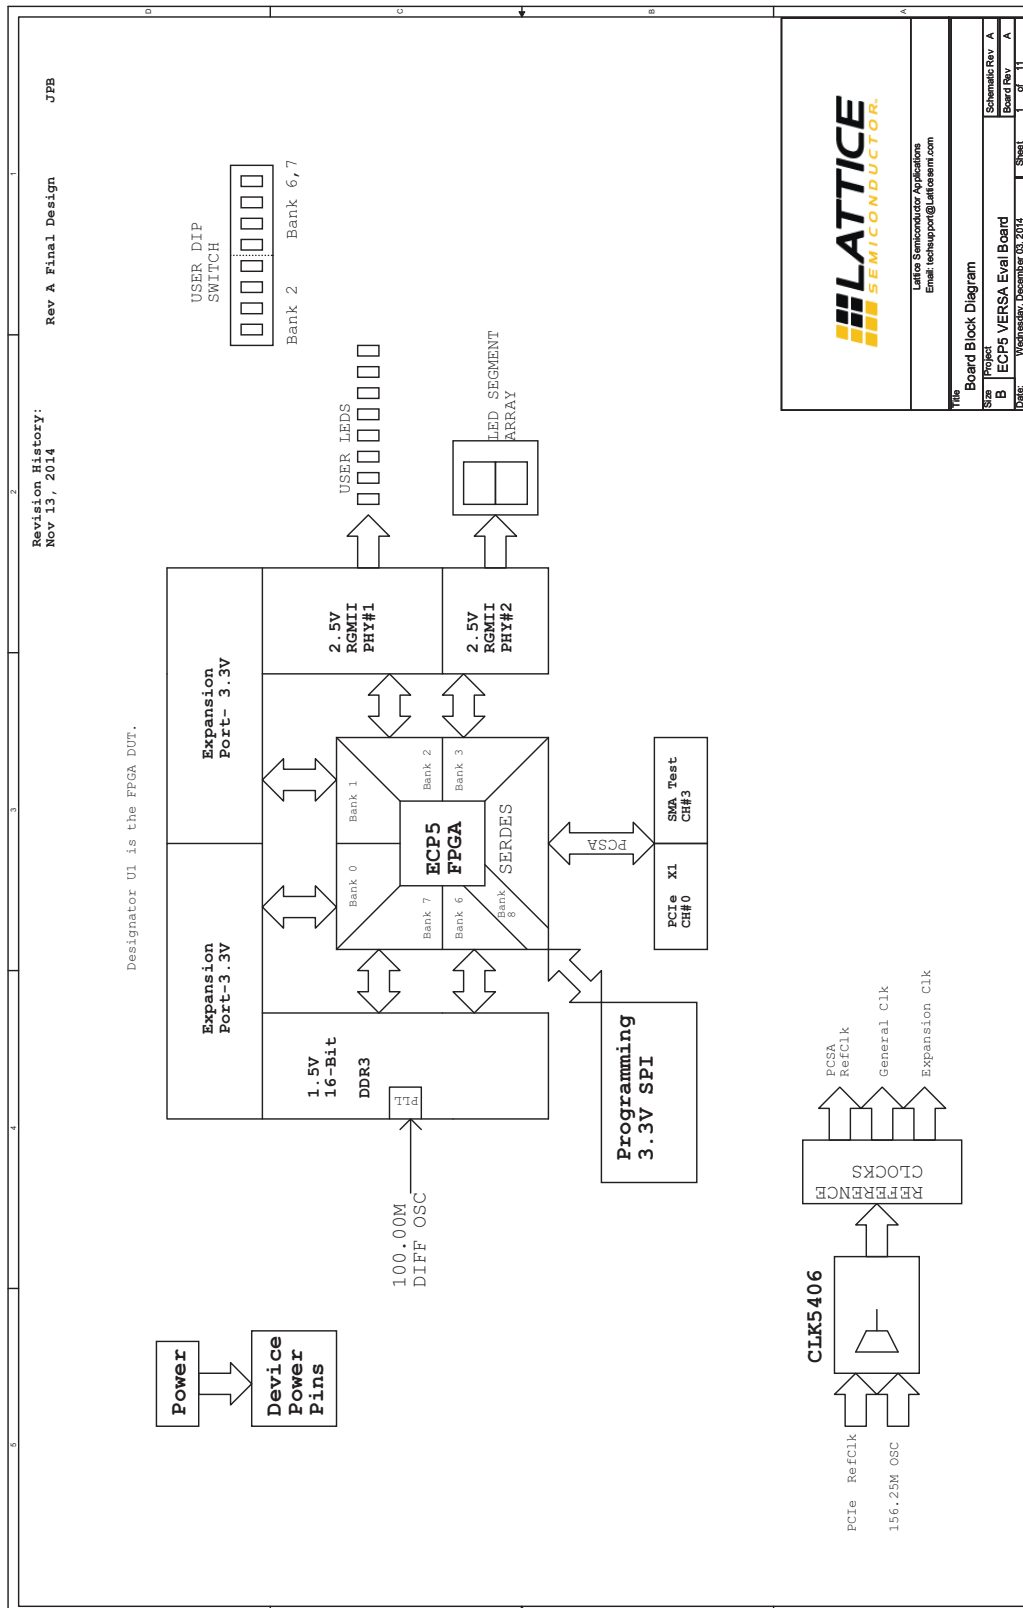


Figure 12. Programming

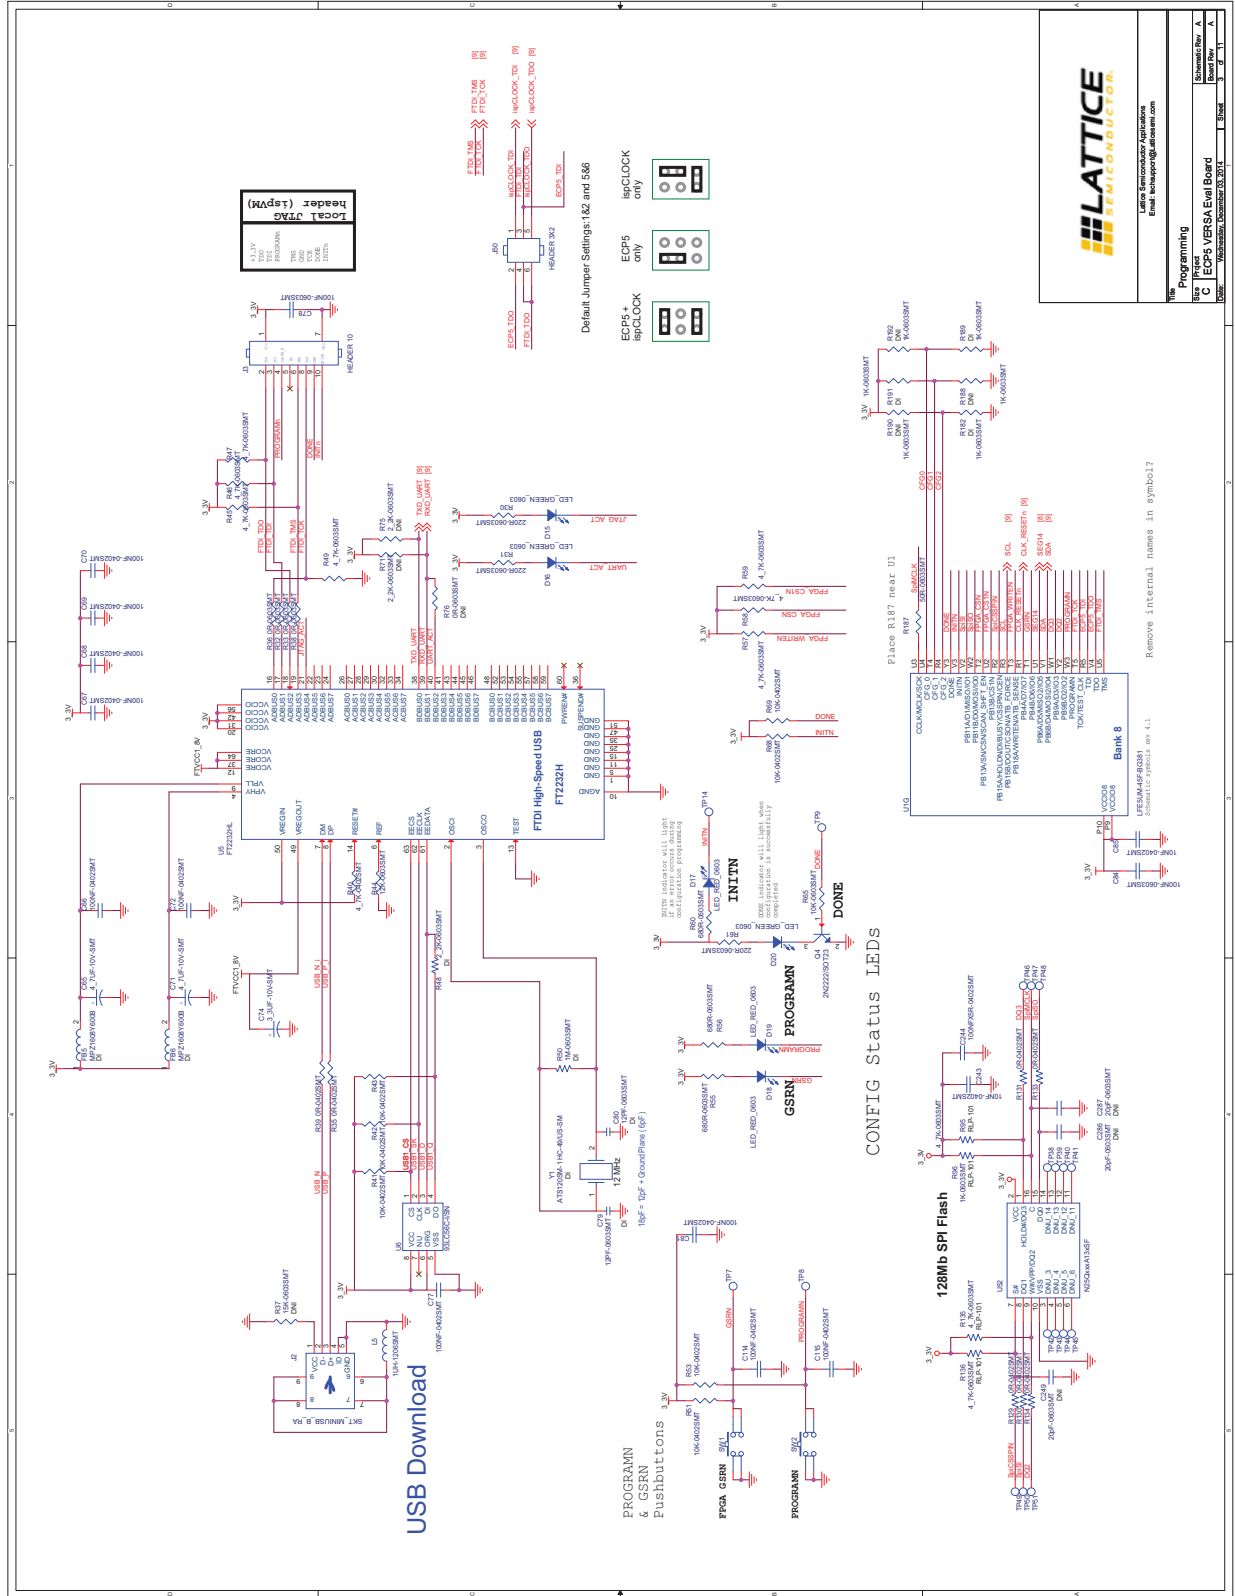


Figure 14. 10/100/1000-T PHY #1/RJ45

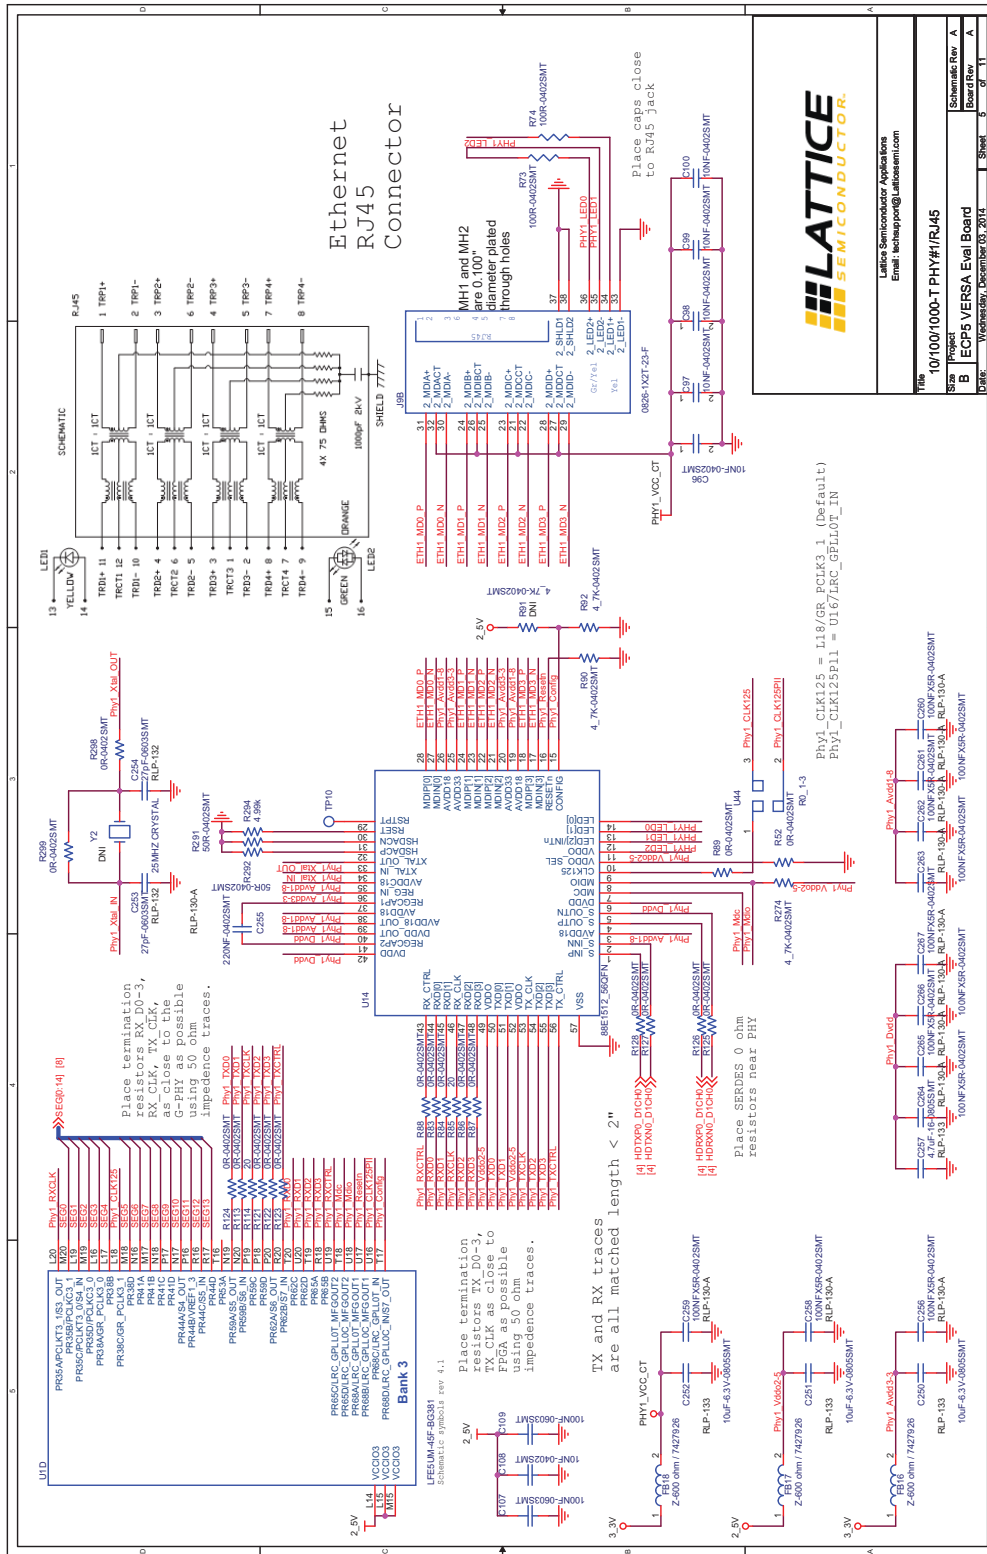


Figure 17. LEDs and Switches




Lattice Semiconductor Applications
Email: techsupport@lattice.com

File: LEDs & Switches

Sheet: 1 of 1
Schematic Rev: A
Board Rev: A

Date: Wed Aug 20, 2014 10:58:13 AM
Sheet: 8 of 11

Figure 19. Expansion Connector

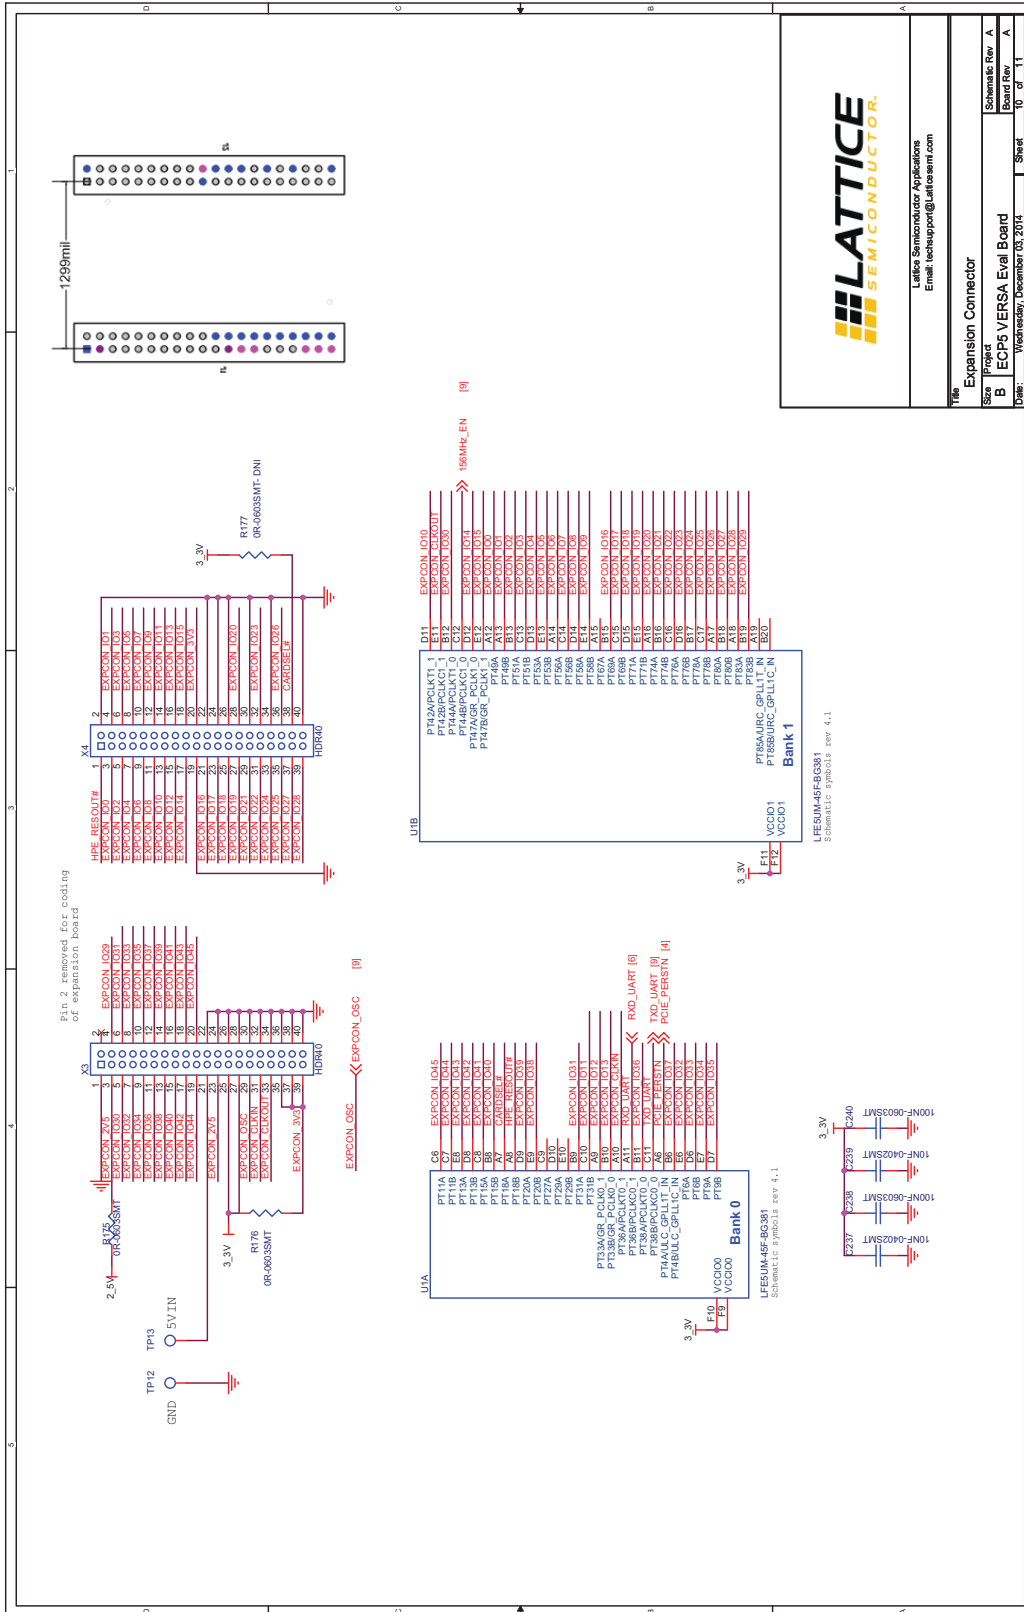

LATTICE SEMICONDUCTOR.

Lattice Semiconductor Applications
Email: techsupport@lattice.com

Expansion Connector

Size: **19x11**

Schema: Rev. **A**

Rev. **10/27/11**

Date: **Wednesday, December 03, 2015**

Sheet: **10** of **11**

Appendix B. Bill of Materials

Table 12. ECP5 Versa Evaluation Board Bill of Materials

Item	Quantity	Reference	Part	Manufacturer	Part Number	Description
1	1	CN1	PCI Express x1 Edge Finger Conn.			
2	33	C1,C2,C3,C4,C5,C20,C21,C29,C33,C85,C89,C92,C95,C96,C97,C98,C99,C100,C108,C110,C113,C134,C135,C136,C137,C138,C146,C202,C203,C206,C237,C239,C243	10NF-0402SMT	Panasonic	ECJ0EB1E103K	CAP .01UF 25V CERAMIC X7R 0402
3	24	C6,C7,C8,C9,C11,C22,C23,C28,C30,C34,C66,C67,C68,C69,C70,C72,C77,C81,C88,C91,C106,C111,C114,C115	100NF-0402SMT	Panasonic	ECJ-0EB1A104K	CAP .1UF 10V CERAMIC X5R 0402
4	8	C18,C25,C26,C36,C102,C104,C176,C180	22UF-16V-TANTBSMT	Kemet	T491B226M016AT	CAPACITOR TANT 22UF 16V 20% SMD
5	12	C19,C24,C27,C35,C101,C103,C171,C173,C178,C181,C391,C394	1UF-16V-0805SMT	Panasonic	ECJ-2FB1C105K	CAP 1UF 16V CERAMIC 0805 X5R
6	7	C31,C32,C90,C93,C94,C105,C112	1NF-0402SMT	TDK Corporation	C1005C0G1E102J	CAP CER 1000PF 25V C0G 5% 0402
7	2	C37,C51	10uF,25V-1206SMT	TDK Corporation	C3216Y5V1E106Z	CAP CER 10UF 25V Y5V 1206
8	6	C38,C39,C52,C53,C255,C273	220NF-0402SMT	TDK Corporation	C1005X7R1C224K050BC	CAP CER 22000PF 16V X7R 10% 0402
9	10	C40,C41,C42,C49,C50,C54,C55,C58,C63,C64	22uF,6.3V-0805SMT	TDK Corporation	C2012X5R0J226M	CAP CER 22UF 6.3V X5R 20% 0805
10	4	C43,C44,C56,C57	1000pF-0402SMT	Panasonic	ECJ-0EB1E102K	CAP 1000PF 25V CERAMIC X7R 0402
11	4	C45,C48,C59,C62	330pF-0402SMT	TDK Corporation	C1005C0G1H331J	CAP CER 330PF 50V C0G 5% 0402
12	4	C46,C47,C60,C61	10pF-0402SMT	TDK Corporation	C1005C0G1H100D	CAP CER 10PF 50V C0G 0402
13	2	C65,C71	4.7UF-10V-SMT	TDK Corporation	C1608X5R1A475K	CAP CER 4.7UF 10V X5R 0603
14	1	C74	3.3UF-10V-SMT	TDK Corporation	C1608X5R1A335K	CAP CER 3.3UF 10V X5R 0603
15	33	C78,C84,C107,C109,C145,C147,C172,C174,C175,C183,C185,C186,C188,C189,C191,C193,C195,C197,C199,C201,C205,C218,C220,C222,C224,C225,C227,C231,C232,C233,C238,C240,C242	100NF-0603SMT	Panasonic	ECJ-1VF1C104Z	CAP .1UF 16V CERAMIC Y5V 0603
16	2	C79,C80	12PF-0603SMT	TDK Corporation	C1608C0G1H120J	CAP CER 12PF 50V C0G 5% 0603
17	27	C86,C87,C244,C247,C248,C256,C258,C259,C260,C261,C262,C263,C264,C265,C266,C267,C274,C275,C277,C278,C279,C280,C281,C282,C283,C284,C285	100NFX5R-0402SMT	Kemet	C0402C104K8PACTU	CAP .10UF 10V CERAMIC X5R 0402
18	1	C170	47UF-16V-TANTBSMT	Kemet	B45196H2476K209	CAP TANTALUM 47UF 10V 10% SMD
19	1	C177	100UF-D3POSCAP	Sanyo	6TPE100MI	100UF,6.3V ,D2E. POSCAP
20	1	C179	10UF-16V-TANTBSMT	AVX	TAJB106K016R	CAP TANTALUM 10UF 16V 10% SMD
21	19	C182,C184,C187,C190,C192,C194,C196,C198,C200,C204,C217,C219,C221,C223,C226,C228,C234,C236,C241	10NF-0603SMT	Kemet	C0603C103K5RACTU	CAP .01UF 50V CERAMIC X7R 0603

Item	Quantity	Reference	Part	Manufacturer	Part Number	Description
22	1	C229	6.8UF-TAN-0805SMT	Kemet	T494R685K006AS	CAP TANT 6.8UF 6.3V 10% SMD
23	1	C235	560PF-0603SMT	Kemet	C0603C561K5RACTU	CAP 560PF 50V CERAMIC X7R 0603
24	2	C245,C246	100pF-0402SMT	Panasonic	ECJ-0EB1E101K	CAP 100PF 25V CERAMIC X7R 0402
25	3	C249,C286,C287	20pF-0603SMT	TDK Corporation	C1608C0G1H200J	CAP CER 20PF 50V C0G 5% 0603
26	8	C250,C251,C252,C268,C269,C270,C392,C393	10uF-6.3V-0805SMT	AVX	08056C106KAT2A	CAP CER 10UF 6.3V X7R 10% 0805
27	4	C253,C254,C271,C272	27pF-0603SMT	Kemet	C0603C270J5GACTU	CAP CERAMIC 27PF 50V NPO 0603
28	2	C257,C276	4.7uF-16-0805SMT	TDK Corporation	C2012Y5V1C475Z/0.85	CAP CER 4.7UF 16V Y5V 0805
29	4	D1,D2,D5,D6	1N4448W	Fairchild	1N4448WT	DIODE 75V 200MA SOD523F
30	4	D3,D4,D7,D8	DFLS220L	Diodes Inc	DFLS220L	DIODE SCHOTTKY 2A 20V PWRDI 123
31	11	D9,D10,D11,D12,D15,D16,D20,D21,D22,D30,D31	LED_GREEN_0603	Wurth	150060VS75000	LED 1.6X0.8MM 568NM GRN CLR SMD
32	1	D13	LED_BLUE_0603	Wurth	150060BS75000	LED 1.6X0.8 470NM BL WTR CLR SMD
33	1	D14	SCHOTTKY/VISHAY-V12P10	Vishay	V12P10-M3/86A	DIODE SCHOTTKY 12A 100V SMPCTO-277A
34	7	D17,D18,D19,D26,D27,D28,D29	LED_RED_0603	Wurth	150060RS75000	LED 1.6X0.8MM 625NM RED CLR SMD
35	1	D23	14-SEGMENT	Kingbright	ACPSA04-41SRWA	LED Display
36	2	D24,D25	LED_YELLOW_0603	Wurth	150060YS75000	LED 1.6X0.8MM 588NM YLW CLR SMD
37	7	FB2,FB3,FB4,FB7,FB8,FB21,FB22	BLM41PG600SN1	Wurth	742792410	FERRITE CHIP 60 OHM 6000MA 1806
38	5	FB5,FB6,FB23,FB24,FB25	MPZ1608Y600B	Wurth	742792602	FERRITE CHIP 60 OHM 2.3A 0603
39	6	FB16,FB17,FB18,FB19,FB20,FB26	Z-600 ohm / 7427926	Wurth	74279265	FERRITE BEAD 600 OHM .2A 0603
40	1	F1	F1251CT-ND	Littlefuse	0154010.DR	FUSEBLOCK WITH 10A FUSE SMD
41	1	J2	SKT_MINIUSB_B_RA	NELTRON	5075BMR-05-SM-CR	CONN MINI USB RCPT RA TYPE B SMD
42	1	J3	HEADER 10	Wurth	61301011121	10x1-0.25 Header
43	2	J4,J50	HEADER 3X2	Wurth	61300621121	3x2-0.25 Header
44	4	J5,J6,J7,J8	SMA	Molex	73391-0060	CONN JACK SMA STR 50 OHM PCB
45	1	J9	0826-1X2T-23-F	Bellfuse	0826-1X2T-23-F	CONN MAGJACK 2PORT GIGABIT GO/Y
46	1	J11	PJ-002A	Wurth	694106301002	
47	1	J13	HEADER 3(DNP)	DNI	TSW-103-07-T-S	3x1-0.25 Header
48	4	L1,L2,L3,L4	4.7uH-SPD62R-472M	API Delavan	SPD62R-472M	6.60mm x 6.20mm x 3.00mm, 4.7uH Power inductor
49	1	L5	1UH-1206SMT	Murata	LQM31PN1R0M00L	INDUCTOR 1.0UH 1.2A 1206
50	1	PP1	PROBEPOINT	DNI		
51	4	Q1,Q2,Q3,Q4	2N2222/SOT23	Diodes Inc	MMBT2222A-7	TRANS NPN 40V 350MW SMD SOT-23
52	2	RN6,RN8	EXB2HV680JV	Panasonic	EXB2HV680JV	RES ARRAY 68 OHM 5% 8 RES SMD
53	1	RN7	EXB2HV221JV	Panasonic	EXB2HV221JV	RES ARRAY 220 OHM 5% 8 RES SMD
54	1	RN9	EXB2HV472JV	Panasonic	EXB2HV472JV	RES ARRAY 4.7K OHM 5% 8 RES SMD

Item	Quantity	Reference	Part	Manufacturer	Part Number	Description
55	1	RP1	CTS-RT1402B7	CTS Corporation Resistor/Electrocomponents	RT2402B7	RES NET DDR SDRAM 50 OHM 3X9 BGA
56	4	R6,R10,R12,R14	51K-0402SMT	Panasonic	ERJ-2RKF5102X	RES 51.0K OHM 1/10W 1% 0402 SMD
57	1	R7	21_5K-0603SMT	Panasonic	ERJ-3EKF2152V	RES 21.5K OHM 1/10W 1% 0603 SMD
58	1	R8	35_7K-0603SMT	Panasonic	ERJ-3EKF3572V	RES 35.7K OHM 1/10W 1% 0603 SMD
59	6	R9,R21,R27,R28,R29,R65	10K-0603SMT	Panasonic	ERJ-3EKF1002V	RES 10.0K OHM 1/10W 1% 0603 SMD
60	1	R11	34K-0402SMT	Panasonic	ERJ-2RKF3402X	RES 34.0K OHM 1/10W 1% 0402 SMD
61	1	R13	11_5K-0603SMT	Panasonic	ERJ-3EKF1152V	RES 11.5K OHM 1/10W 1% 0603 SMD
62	1	R15	3_83K-0603SMT	Panasonic	ERJ-3EKF3831V	RES 3.83K OHM 1/10W 1% 0603 SMD
63	2	R16,R37	15K-0603SMT	Panasonic	ERJ-3EKF1502V	RES 15.0K OHM 1/10W 1% 0603 SMD
64	1	R17	16_9K-0603SMT	Panasonic	ERJ-3EKF1692V	RES 16.9K OHM 1/10W 1% 0603 SMD
65	1	R18	63_4K-0402SMT	Panasonic	ERJ-2RKF6342X	RES 63.4K OHM 1/10W 1% 0402 SMD
66	1	R19	30_1K-0402SMT	Panasonic	ERJ-2RKF3012X	RES 30.1K OHM 1/10W 1% 0402 SMD
67	1	R20	20K-0402SMT	Panasonic	ERJ-2RKF2002X	RES 20.0K OHM 1/10W 1% 0402 SMD
68	4	R22,R23,R24,R25	1_8K-1206SMT	Panasonic	ERJ-8ENF1801V	RES 1.80K OHM 1/4W 1% 1206 SMD
69	5	R26,R30,R31,R61,R179	220R-0603SMT	Panasonic	ERJ-3EKF2200V	RES 220 OHM 1/10W 1% 0603 SMD
70	12	R32,R33,R36,R38,R76,R141,R145,R146,R169,R170,R175,R176	0R-0603SMT	Panasonic	ERJ-3GEY0R00V	RES 0.0 OHM 1/10W 0603 SMD
71	44	R35,R39,R52,R83,R84,R86,R87,R88,R89,R93,R94,R98,R100,R101,R102,R103,R109,R110,R112,R113,R115,R116,R117,R118,R119,R120,R121,R122,R123,R124,R125,R126,R127,R128,R129,R130,R131,R133,R134,R160,R298,R299,R300,R301	0R-0402SMT	Panasonic	ERJ-2GE0R00X	RES 0.0 OHM 1/10W 0402 SMD
72	12	R40,R90,R91,R92,R104,R105,R106,R162,R180,R181,R274,R275	4_7K-0402SMT	Panasonic	ERJ-2RKF4701X	RES 4.70K OHM 1/10W 1% 0402 SMD
73	8	R41,R42,R43,R51,R53,R68,R69,R157	10K-0402SMT	Panasonic	ERJ-2RKF1002X	RES 10.0K OHM 1/10W 1% 0402 SMD
74	1	R44	12K-0603SMT	Panasonic	ERJ-3EKF1202V	RES 12.0K OHM 1/10W 1% 0603 SMD
75	12	R45,R46,R47,R49,R57,R58,R59,R72,R95,R135,R136,R142	4_7K-0603SMT	Panasonic	ERJ-3EKF4701V	RES 4.70K OHM 1/10W 1% 0603 SMD
76	3	R48,R71,R75	2_2K-0603SMT	Panasonic	ERJ-3EKF2201V	RES 2.20K OHM 1/10W 1% 0603 SMD
77	1	R50	1M-0603SMT	Panasonic	ERJ-3EKF1004V	RES 1.00M OHM 1/10W 1% 0603 SMD
78	3	R55,R56,R60	680R-0603SMT	Panasonic	ERJ-3EKF6800V	RES 680 OHM 1/10W 1% 0603 SMD
79	5	R63,R64,R66,R67,R70	0.1	Vishay Dale	WSL2010R1000FEA	RES .1 OHM 1/2W 1% 2010 SMD
80	5	R73,R74,R107,R108,R156	100R-0402SMT	Panasonic	ERJ-2RKF1000X	RES 100 OHM 1/10W 1% 0402 SMD
81	4	R85,R99,R111,R114	20	Vishay	CRCW040220R0FKED	RES 20.0 OHM 1/16W 1% 0402 SMD

Item	Quantity	Reference	Part	Manufacturer	Part Number	Description
82	7	R96,R182,R188,R189,R190,R191,R192	1K-0603SMT	Panasonic	ERJ-3EKF1001V	RES 1.00K OHM 1/10W 1% 0603 SMD
83	1	R140	0.01	Vishay Dale	WSL2512R0100FEA18	RES .01 OHM 2W 1% 2512 SMD
84	5	R143,R144,R148,R149,R178	OPEN-0603SMT	DNI		
85	1	R147	240R-0603SMT	Panasonic	ERJ-3EKF2400V	RES 240 OHM 1/10W 1% 0603 SMD
86	10	R150,R151,R152,R153,R154,R155,R291,R292,R293,R295	50R-0402SMT	Vishay	FC0402E50R0FST1	RES 50 OHM 50MW +/-1% 0402 SMD
87	7	R158,R161,R164,R165,R168,R183,R186	10R-0402SMT	Panasonic	ERJ-2RKF10R0X	RES 10.0 OHM 1/10W 1% 0402 SMD
88	2	R159,R166	220R-0402SMT	Panasonic	ERJ-2RKF2200X	RES 200 OHM 1/10W 1% 0402 SMD
89	1	R163	680R-0402SMT	Panasonic	ERJ-2RKF6800X	RES 680 OHM 1/10W 1% 0402 SMD
90	1	R167	470R-0402SMT	Panasonic	ERJ-2RKF4700X	RES 470 OHM 1/10W 1% 0402 SMD
91	1	R177	0R-0603SMT- DNI	DNI		
92	1	R184	121K-0603SMT	Panasonic	ERJ-3EKF1213V	RES 121K OHM 1/10W 1% 0603 SMD
93	1	R185	110K-0603SMT	Panasonic	ERJ-3EKF1103V	RES 110K OHM 1/10W 1% 0603 SMD
94	1	R187	50R-0603SMT	Panasonic	ERJ-3EKF49R9V	RES 49.9 OHM 1/10W 1% 0603 SMD
95	2	R294,R296	4.99k	Panasonic	ERJ-2RKF4991X	RES 4.99K OHM 1/10W 1% 0402 SMD
96	2	SW1,SW2	PTS645SM43SMTR92 LFS	Würth	430483031816	SPST SMD
97	1	SW3	TDA DIP-8	Würth	416131160808	8-DIP
98	4	TH1,TH2,TH3,TH4	ThruHole	DNI		
99	39	TP1,TP2,TP3,TP4,TP5,TP6,TP7,TP8,TP9,TP10,TP11,TP12,TP13,TP14,TP15,TP16,TP17,TP18,TP19,TP20,TP21,TP22,TP23,TP24,TP25,TP38,TP39,TP40,TP41,TP42,TP43,TP44,TP45,TP46,TP47,TP48,TP49,TP50,TP51	TestPoint	DNI		
100	1	U1	LFE5UM-45F-BG381	LATTICE SUPPLIED	LFE5U-45F-7BG381C	
101	2	U3,U4	LT3508EUF	LATTICE SUPPLIED	LT3508EUF#PBF	Dual Monolithic 1.4A Step-Down Switching Regulator
102	1	U5	FT2232HL	FTDI	FTD2232HL	USB-UART/JTAG
103	1	U6	93LC56C-I/SN	MicroChip	93LC56C-I/SN	IC EEPROM 2KBIT 3MHZ 8SOIC
104	1	U11	ddr3-96bga	Micron	MT41K64M16TW-107:J	64Mb/x16, 1.5V, 96-ball FBGA, 667 MHz, DDR3-1333
105	1	U12	LP2998-SO8	National	LP2998MAX/NOPB	Termination regulator
106	1	U13	ispCLOCK5406D	LATTICE SUPPLIED	ISPPAC-CLK5406D-01SN48I	
107	2	U14,U15	88E1512_56QFN	LATTICE SUPPLIED	88E1512-A0-NNP2C000	SINGLE-PORT EEE GIGABIT ETHER
108	2	U44,U45	R0_1-3	Panasonic	ERJ-3GEY0R00V	RES 0.0 OHM 1/10W 0603 SMD
109	1	U52	N25QxxxA13xSF	Micron	N25Q128A13ESF40G	Serial Flash
110	2	U53,U54	LT3085	LATTICE SUPPLIED	LT3085EMS8E#PBF	Adjustable 500mA Single Resistor Low Dropout Regulator

Item	Quantity	Reference	Part	Manufacturer	Part Number	Description
111	1	X1	100_00MHz_LVDS	SiTime	SiT9120AC-2D2-33E100.000	100MHz Low-Jitter LVDS Clock Osc., 7mm x 5mm, 50ppm
112	1	X2	156.25MHz_LVCMOS	SiTime	SiT8256AI-83-33E-156.250T	156.25MHz Single ended CMOS Clock Osc., 7mm x 5mm
113	2	X3,X4	HDR40	Würth	61302021121	HEADER 40POS .100" DL TIN
114	1	Y1	12MHZ	CTS	ATS120SM-T	CRYSTAL 12.0000MHZ 20PF SMD
115	2	Y2,Y3	25MHZ	Citizen	HC49US-25.000MABJ-UB	CRYSTAL 25.000 MHZ 18PF HC49/US