

# 1:4 E-Series, RF Flux Coupled Transformer

## 2 - 800 MHz



MABAES0061

Rev. V8

### Features

- Surface Mount Package
- 1:4 Impedance Ratio
- CT on Secondary
- Available on Tape & Reel
- RoHS\* Compliant version of ETC4-1-2

### Applications


- Wireless Networking & Communication

### Description

The MABAES0061 is a RoHS compliant device that is equivalent to the ETC4-1-2 transformer. This device is a 1:4 RF flux coupled step-up transformer. This transformer is offered in a SM-22 surface mount package and is designed to be utilized in both standard reflow and high temperature soldering reflow profiles.

Ideally suited for high volume cellular and wireless applications. Typical applications include single to balanced mode conversion and impedance matching.

### Functional Schematic



### Pin Configuration

Pin #	Function
1	Secondary
2	Secondary CT
3	Secondary Dot
4	Primary Dot
5	Primary

### Electrical Specifications: Freq. = 2 - 800 MHz, T<sub>A</sub> = 25°C, Z<sub>0</sub> = 50 Ω, P<sub>in</sub> = 0 dBm

Parameter	Conditions	Units	Min.	Typ.	Max.
Impedance Ratio	—	ratio	—	1:4	—
Insertion Loss (f <sub>L</sub> - f <sub>U</sub> )	10 - 100 MHz	dB	—	—	1.0
	5 - 600 MHz			1.21	2.0
	2 - 800 MHz			—	3.0
Amplitude Unbalance	10 - 100 MHz	dB	—	—	0.25
	2 - 800 MHz				1.00
Phase Unbalance	10 - 500 MHz	°	—	—	2
	2 - 800 MHz				10

### Ordering Information

Part Number	Description
MABAES0061	2000 piece reel

### Absolute Maximum Ratings<sup>1</sup>

Parameter	Absolute Maximum
RF Input Power	250 mW
DC Current	240 mA <sup>2</sup>
Dielectric Withstanding Voltage	>2050 V
Operating Temperature	-55°C to +85°C

1. Operation of this device above any one of these parameters may cause permanent damage.
2. The maximum DC current applies to the secondary center tap in applications where the secondary is balanced.


# 1:4 E-Series, RF Flux Coupled Transformer 2 - 800 MHz




MABAES0061  
Rev. V8

## Typical Performance Curves over extended Bandwidth (30 KHz - 1 GHz)


**Insertion Loss (-3 to -13 dB) vs. Frequency (30 kHz to 1 GHz)**

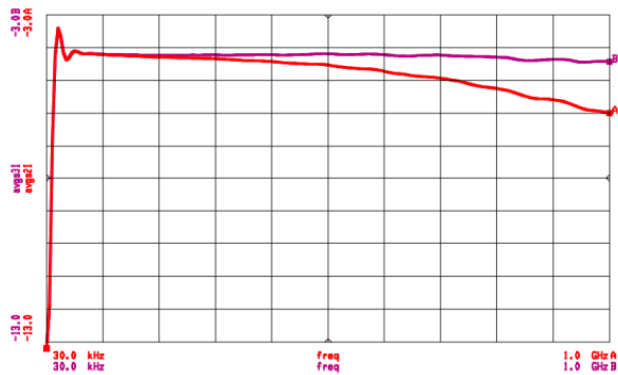


**Phase Unbalance (0 to 360 deg.) vs. Frequency (30 kHz to 1 GHz)**

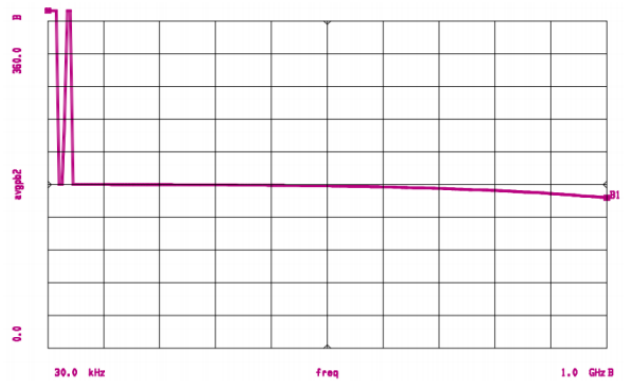

**Amplitude Unbalance (5 to -5 dB) vs. Frequency (30 kHz to 1 GHz)**

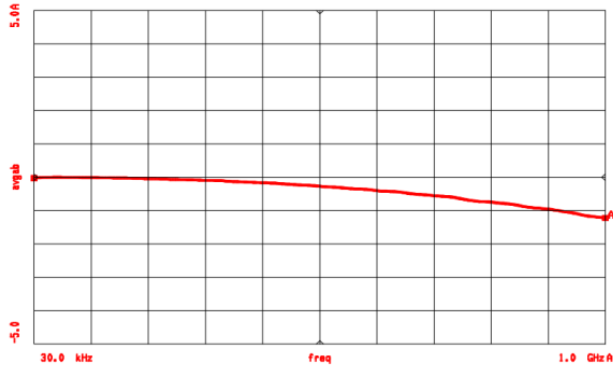

**Input Impedance on Smith Chart vs. Frequency (30 kHz to 1 GHz)**

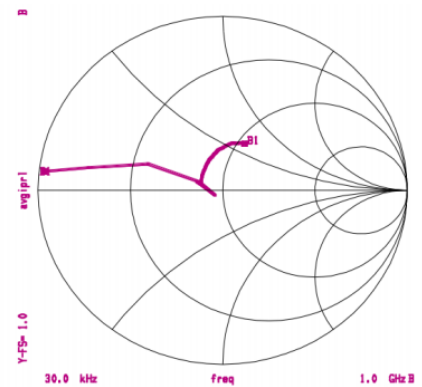


# 1:4 E-Series, RF Flux Coupled Transformer 2 - 800 MHz



MABAES0061

Rev. V8

## Lead-Free Outline Drawing

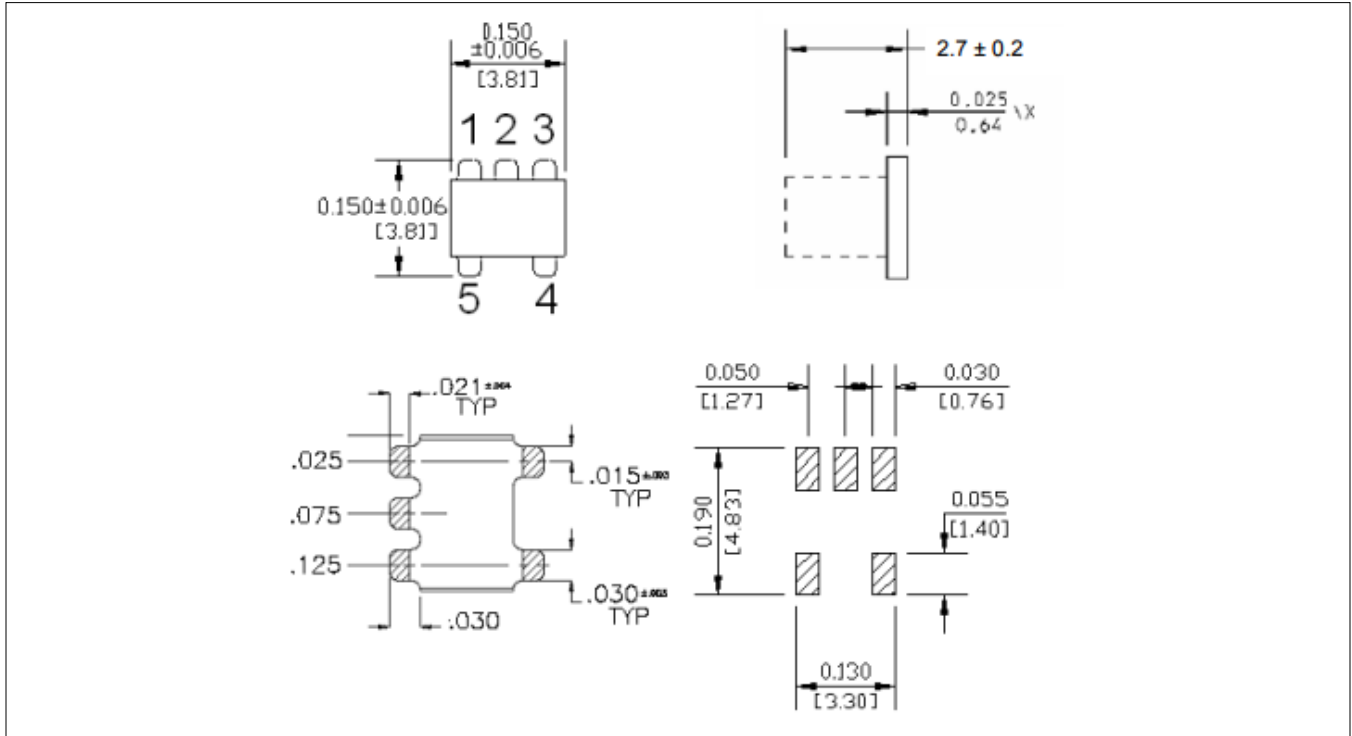

Dimensions in mm.  
Tolerance:  $\pm 0.2$  mm unless otherwise noted.  
Model number and lot code are printed on the reel.

# 1:4 E-Series, RF Flux Coupled Transformer

## 2 - 800 MHz



MABAES0061

Rev. V8

MACOM Technology Solutions Inc. ("MACOM"). All rights reserved.

These materials are provided in connection with MACOM's products as a service to its customers and may be used for informational purposes only. Except as provided in its Terms and Conditions of Sale or any separate agreement, MACOM assumes no liability or responsibility whatsoever, including for (i) errors or omissions in these materials; (ii) failure to update these materials; or (iii) conflicts or incompatibilities arising from future changes to specifications and product descriptions, which MACOM may make at any time, without notice. These materials grant no license, express or implied, to any intellectual property rights.

THESE MATERIALS ARE PROVIDED "AS IS" WITH NO WARRANTY OR LIABILITY, EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHT, ACCURACY OR COMPLETENESS, OR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES WHICH MAY RESULT FROM USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.