

SIRIUS SAFETY RELAY WITH AUXILIARY CONTACTOR  
 RELEASE CIRCUIT (RC),  
 DC 24V, 90.0MM, SCREW TERMINAL,  
 RC INSTANT.: 6S, RC DELAYED: 0,  
 MC: 1NC, AUTOSTART / MONITORED START,  
 BASIC DEVICE, MAX. ACHIEVABLE SIL: 2,  
 PL: D

General technical details:		
<b>product brand name</b>		SIRIUS
<b>product designation</b>		safety relays
<b>Design of the product</b>		for EMERGENCY-STOP units
<b>protection class IP / of the housing</b>		IP20
<b>Protection class IP / of the terminal</b>		IP20
<b>Protection against electrical shock</b>		finger-safe
<b>Insulation voltage / rated value</b>	V	690
<b>Ambient temperature</b>		
• during storage	°C	-40 ... +80
• during operating	°C	-25 ... +60
<b>Air pressure</b>		
• according to SN 31205	kPa	90 ... 106
<b>Relative humidity</b>		
• during operating phase	%	10 ... 95
<b>Installation altitude / at a height over sea level / maximum</b>	m	2,000
<b>Resistance against vibration / according to IEC 60068-2-6</b>		5 ... 500 Hz: 0,075 mm
<b>Resistance against shock</b>		5g / 11 ms
<b>Impulse voltage resistance / rated value</b>	V	6,000
<b>EMC emitted interference</b>		IEC 60947-5-1, IEC 60000-4-3, IEC 60000-4-5, IEC 60000-4-6
<b>Installation environment relating to EMC</b>		This product is suitable for Class A environments only. It can cause undesired radio-frequency interference in residential environments. If this is the case, the user must take appropriate measures.
<b>Item designation</b>		
• according to DIN 40719 extendable after IEC 204-2 / according to IEC 750		KT
• according to DIN EN 61346-2		F
<b>Contact reliability</b>		one incorrect switching operation of 100 million switching operations (17 V, 5 mA)

<b>Number of sensor inputs</b> • 1-channel or 2-channel		1
<b>Design of the cascading</b>		none
<b>Type of the safety-related wiring / of the inputs</b>		single-channel and two-channel
<b>Product feature / transverse contact-secure</b>		Yes
<b>Safety Integrity Level (SIL)</b> • according to IEC 61508		SIL2
<b>SIL claim limit (for a subsystem) / according to EN 62061</b>		2
<b>Performance Level (PL)</b> • according to ISO 13849-1		d
<b>Category / according to EN 954-1</b>		3
<b>Category / according to ISO 13849-1</b>		3
<b>Hardware fault tolerance / according to IEC 61508</b>		1
<b>Safety device type / according to IEC 61508-2</b>		Type B
<b>Probability of dangerous failure per hour (PFHD) / with high demand rate / according to EN 62061</b>	1/h	0.11E-7
<b>T1 value / for proof test interval or service life / according to IEC 61508</b>	a	20
<b>Number of outputs / as contact-affected switching element</b> • as NC contact / for reporting function / instantaneous switching • as NO contact / safety-related / instantaneous switching • as NO contact / safety-related / delayed switching		1 6 0
<b>Number of outputs / as contact-less semiconductor switching element</b> • safety-related • delayed switching • non-delayed • for reporting function • delayed switching • non-delayed		0 0 0 0
<b>Stop category / according to DIN EN 60204-1</b>		0

#### General technical details:

<b>Design of the input</b> • cascading-input/functional switching • feedback input • start input		No Yes Yes
<b>Design of the electrical connection / jumper socket</b>		Yes
<b>Operating cycles / maximum</b>	1/h	1,000
<b>Switching capacity current</b> • of NO contacts of relay outputs		

<ul style="list-style-type: none"> <li>• at DC-13               <ul style="list-style-type: none"> <li>• at 24 V</li> <li>• at 115 V</li> <li>• at 230 V</li> </ul> </li> <li>• at AC-15               <ul style="list-style-type: none"> <li>• at 115 V</li> <li>• at 230 V</li> </ul> </li> </ul>	A	10
	A	1
	A	0.3
<ul style="list-style-type: none"> <li>• of NC contacts of relay outputs               <ul style="list-style-type: none"> <li>• at DC-13                   <ul style="list-style-type: none"> <li>• at 24 V</li> <li>• at 115 V</li> <li>• at 230 V</li> </ul> </li> <li>• at AC-15                   <ul style="list-style-type: none"> <li>• at 115 V</li> <li>• at 230 V</li> </ul> </li> </ul> </li> </ul>	A	6
	A	6
<b>Mechanical operating cycles as operating time / typical</b>		30,000,000
<b>Max. permissible voltage for safe isolation / between electronic evaluation device and enabling circuit / according to EN 60947-1</b>	V	400
<b>Design of the fuse link / for short-circuit protection of the NO contacts of the relay outputs / required</b>		gL/gG: 10 A
<b>Resistance to direct current / of the cable / maximum</b>	Ω	250
<b>Cable length / between sensor and electronic evaluation device / with Cu 1.5 mm<sup>2</sup> and 150 nF/km / maximum</b>	m	2,000
<b>Make time / with automatic start</b>		
<ul style="list-style-type: none"> <li>• typical</li> </ul>	ms	100
<ul style="list-style-type: none"> <li>• for AC / maximum</li> </ul>	ms	200
<b>Make time / with automatic start / after mains power cut</b>		
<ul style="list-style-type: none"> <li>• typical</li> </ul>	ms	350
<ul style="list-style-type: none"> <li>• maximum</li> </ul>	ms	500
<b>Make time / with monitored start</b>		
<ul style="list-style-type: none"> <li>• maximum</li> </ul>	ms	100
<ul style="list-style-type: none"> <li>• typical</li> </ul>	ms	60
<b>Backslide delay time / after opening of the safety circuits / typical</b>	ms	30
<b>Backslide delay time / at mains power cut</b>		
<ul style="list-style-type: none"> <li>• typical</li> </ul>	ms	100
<ul style="list-style-type: none"> <li>• maximum</li> </ul>	ms	120
<b>Recovery time / after opening of the safety circuits / typical</b>	ms	20
<b>Recovery time / after mains power cut / typical</b>	s	0.02
<b>Pulse duration</b>		
<ul style="list-style-type: none"> <li>• of the sensor input / minimum</li> </ul>	ms	20
<ul style="list-style-type: none"> <li>• of the ON pushbutton input / minimum</li> </ul>	s	0.02

- of the cascading-entrance / minimum

s	0.02
---	------

#### Control circuit:

Type of voltage / of the controlled supply voltage		DC
--	--	----

Control supply voltage / 1 / for DC / rated value	V	24
---	---	----

operating range factor control supply voltage rated value / of the magnet coil		
--	--	--

- for DC

	0.85 ... 1.1
--	--------------

#### Auxiliary circuit:

Contact reliability / of the auxiliary contacts		< 1 error per 100 million operating cycles
---	--	--

#### Installation/mounting/dimensions:

mounting position		any
-------------------	--	-----

Type of mounting		screw and snap-on mounting
------------------	--	----------------------------

Width	mm	90
-------	----	----

Height	mm	132
--------	----	-----

Depth	mm	146
-------	----	-----

#### Connections:

Design of the electrical connection		screw-type terminals
-------------------------------------	--	----------------------

Type of the connectable conductor cross-section		
---	--	--

- solid

	1x (0.2 ... 2.5 mm <sup>2</sup> ), 2x (0.2 ... 1.0 mm <sup>2</sup> )
--	--

- finely stranded

	1x (0.25 ... 2.5 mm <sup>2</sup> ), 2x (0.25 ... 1.0 mm <sup>2</sup> )
--	--

- with wire end processing

Type of the connectable conductor cross-section / for AWG conductors		
--	--	--

- solid

	2x (24 ... 18)
--	----------------

- stranded

	2x (24 ... 18)
--	----------------

#### Product Function:

Product function		
------------------	--	--

- light barrier monitoring

	No
--	----

- standstill monitoring

	No
--	----

- protective door monitoring

	Yes
--	-----

- automatic start

	Yes
--	-----

- magnetic switch monitoring Normally closed contact-Normally open contact

	No
--	----

- rotation speed monitoring

	No
--	----

- laser scanner monitoring

	No
--	----

- monitored start-up

	Yes
--	-----

- light grid monitoring

	No
--	----

<ul style="list-style-type: none"> <li>• magnetic switch monitoring Normally closed contact-Normally closed contact</li> <li>• emergency stop function</li> <li>• step mat monitoring</li> </ul>	Yes
	Yes
	No
<b>Suitability for interaction / pressing control</b>	No
<b>Acceptability for application</b>	
<ul style="list-style-type: none"> <li>• monitoring of floating sensors</li> <li>• monitoring of non-floating sensors</li> <li>• safety cut-out switch</li> <li>• position switch monitoring</li> <li>• EMERGENCY-OFF circuit monitoring</li> <li>• valve monitoring</li> <li>• tactile sensor monitoring</li> <li>• magnetically operated switches monitoring</li> <li>• safety-related circuits</li> </ul>	Yes
	No
	Yes
	Yes
	Yes
	No
	No
	No
	Yes

**Certificates/approvals:**

<b>Verification of suitability</b>	UL, CSA, EN 60204-1, EN ISO 12100, EN 954-1, IEC 61508
<ul style="list-style-type: none"> <li>• TÜV (German technical inspectorate) certificate</li> <li>• UL-registration</li> <li>• BG BIA certificate</li> </ul>	Yes
	Yes
	Yes

<b>General Product Approval</b>	<b>EMC</b>	<b>Functional Safety / Safety of Machinery</b>	<b>Declaration of Conformity</b>
---------------------------------	------------	--	----------------------------------



<b>Test Certificates</b>	<b>other</b>
<a href="#">Special Test Certificate</a>	<a href="#">Confirmation</a>
	<a href="#">Environmental Confirmations</a>

**Further information:**



**Information- and Downloadcenter (Catalogs, Brochures,...)**  
<http://www.siemens.com/industrial-controls/catalogs>

**Industry Mall (Online ordering system)**  
<http://www.siemens.com/industrial-controls/mall>

**Cax online generator:**  
<http://www.siemens.com/cax>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**  
<http://support.automation.siemens.com/WW/view/en/3TK2852-1BB40/all>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**  
[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3TK2852-1BB40](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3TK2852-1BB40)

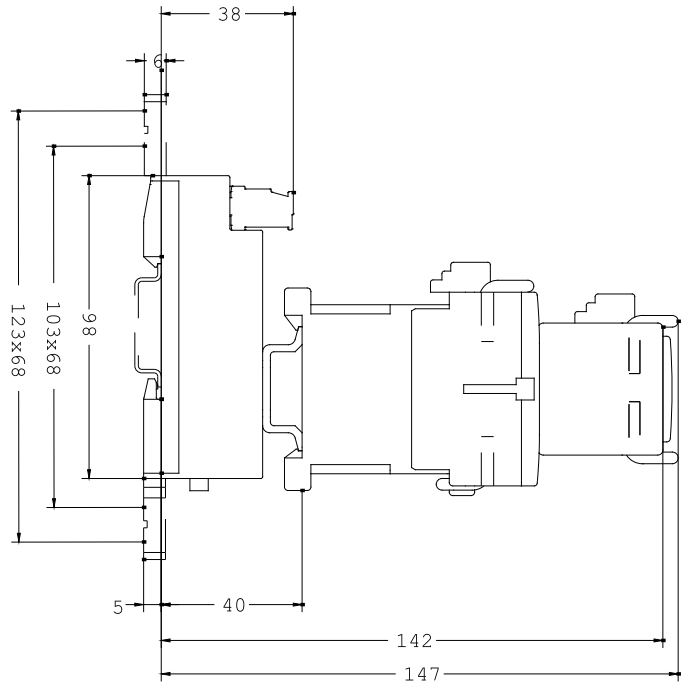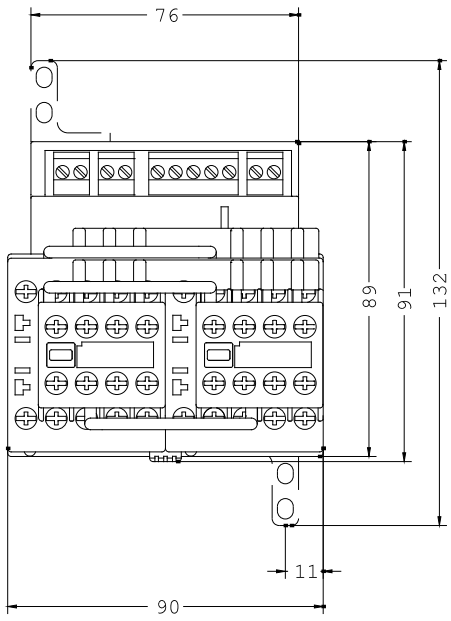

last change:

Mar 4, 2013