



SAW Components

Data Sheet B4135

Data Sheet

An abstract graphic featuring the word "EPCOS" in large, white, sans-serif capital letters. The letters are slightly tilted and appear to be floating or attached to a series of curved, metallic-looking bands that sweep across the frame. In the background, a faint, wireframe globe is visible, adding a global or technological context to the design. The overall color scheme is dark and monochromatic, with highlights on the metallic bands and the white text.



SAW Components

B4135

Low-Loss Filter

1960,00 MHz

Data Sheet




Ceramic package **DCC6C**

Features

- Low-loss RF filter for PCS systems, receive path
- Usable passband 60 MHz
- No matching network required for operation at 50 Ω
- Package for **Surface Mounted Technology (SMT)**

Terminals


- Ni, gold-plated

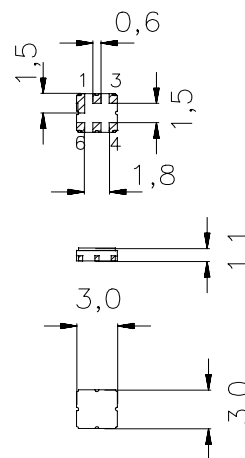

Dimensions in mm, approx. weight 0,037 g

Pin configuration

2	Input
1, 3	To be grounded
5	Output
4, 6	To be grounded



Type	Ordering code	Marking and Package according to	Packing according to
B4135	B39202-B4135-U410	C61157-A7-A67	F61074-V8088-Z000

Electrostatic **S**ensitive **D**evice (ESD)

Maximum ratings

Operable temperature range	T	- 40/+ 85	$^{\circ}\text{C}$	Contact discharge, $R_s=0\ \Omega$, $C_s=200\ \text{pF}$ source and load impedance 50 Ω peak power of GSM signal, duty cycle 1 : 8 CDMA signal
Storage temperature range	T_{stg}	- 40/+ 85	$^{\circ}\text{C}$	
DC voltage	V_{DC}	0	V	
ESD	V_{DC}	50	V	
Input power max.	P_{IN}	5	dBm	
		0	dBm	



SAW Components

B4135

Low-Loss Filter

1960,00 MHz

Data Sheet



Characteristics

Operating temperature range: $T = +25 \pm 2^\circ \text{C}$

Terminating source impedance: $Z_S = 50 \Omega$

Terminating load impedance: $Z_L = 50 \Omega$

				min.	typ.	max.	
Center frequency	f_c			—	1960,0	—	MHz
Maximum insertion attenuation	$\alpha_{\max}$						
	1930,0 ... 1990,0	MHz		—	3,1	3,7	dB
Amplitude ripple (p-p)	$\Delta\alpha$						
	1930,0 ... 1990,0	MHz		—	1,1	1,7	dB
Input VSWR							
	1930,0 ... 1990,0	MHz		—	2,1	2,4	
Output VSWR							
	1930,0 ... 1990,0	MHz		—	2,1	2,4	
Attenuation	α						
	10,0 ... 1850,0	MHz		20,0	22,0	—	dB
	1850,0 ... 1910,0	MHz		17,5	28,0	—	dB
	2010,0 ... 2040,0	MHz		5,0	10,0	—	dB
	2040,0 ... 2070,0	MHz		20,0	30,0	—	dB
	2070,0 ... 5000,0	MHz		22,0	27,0	—	dB
	5000,0 ... 6000,0	MHz		10,0	18,0	—	dB



SAW Components

B4135

Low-Loss Filter

1960,00 MHz

Data Sheet



Characteristics

Operating temperature range: $T = -30$ to $+80^{\circ}\text{C}$

Terminating source impedance: $Z_S = 50\ \Omega$

Terminating load impedance: $Z_L = 50\ \Omega$

				min.	typ.	max.	
Center frequency	f_c			—	1960,0	—	MHz
Maximum insertion attenuation	$\alpha_{\max}$						
	1930,0 ... 1990,0	MHz		—	3,3	4,1	dB
Amplitude ripple (p-p)	$\Delta\alpha$						
	1930,0 ... 1990,0	MHz		—	1,3	2,1	dB
Input VSWR							
	1930,0 ... 1990,0	MHz		—	2,1	2,4	
Output VSWR							
	1930,0 ... 1990,0	MHz		—	2,1	2,4	
Attenuation	α						
	10,0 ... 1850,0	MHz		20,0	22,0	—	dB
	1850,0 ... 1910,0	MHz		11,5	15,0	—	dB
	2010,0 ... 2040,0	MHz		4,5	10,0	—	dB
	2040,0 ... 2070,0	MHz		20,0	30,0	—	dB
	2070,0 ... 5000,0	MHz		22,0	27,0	—	dB
	5000,0 ... 6000,0	MHz		10,0	18,0	—	dB



SAW Components

B4135

Low-Loss Filter

1960,00 MHz

Data Sheet



Characteristics

Operating temperature range: $T = -30$ to $+85^{\circ}\text{C}$
 Terminating source impedance: $Z_S = 50\ \Omega$
 Terminating load impedance: $Z_L = 50\ \Omega$

			min.	typ.	max.	
Center frequency	f_c		—	1960,0	—	MHz
Maximum insertion attenuation	$\alpha_{\max}$					
	1930,6 ...1989,4 MHz		—	3,3	4,0	dB
Amplitude ripple (p-p)	$\Delta\alpha$					
	1930,6 ...1989,4 MHz		—	1,3	2,1	dB
Input VSWR						
	1930,6 ...1989,4 MHz		—	2,1	2,4	
Output VSWR						
	1930,6 ...1989,4 MHz		—	2,1	2,4	
Attenuation	α					
	10,0 ...1850,6 MHz		20,0	22,0	—	dB
	1850,6 ...1909,4 MHz		13,0 ¹⁾	15,0	—	dB
	2010,0 ...2040,0 MHz		4,5	10,0	—	dB
	2040,0 ...2070,0 MHz		20,0	30,0	—	dB
	2070,0 ...5000,0 MHz		22,0	27,0	—	dB
	5000,0 ...6000,0 MHz		10,0	18,0	—	dB

1) For -30 to $+65$ degree C, the minimum rejection is 15.0 dB

For -30 to $+25$ degree C, the minimum rejection is 19.0 dB



SAW Components

B4135


Low-Loss Filter

1960,00 MHz


Data Sheet





Transfer Function(25° C spec)

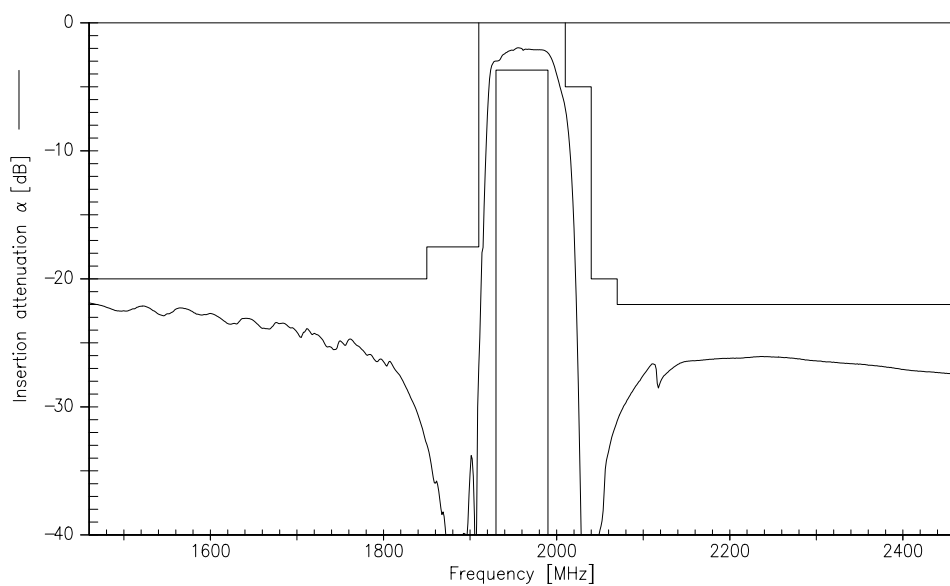

Transfer function (wideband)

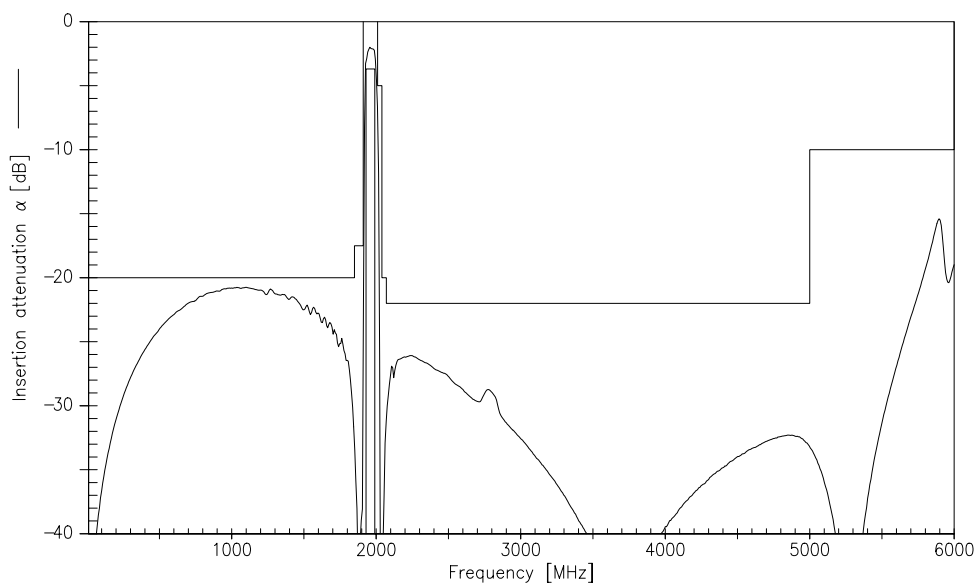

Reflection functions

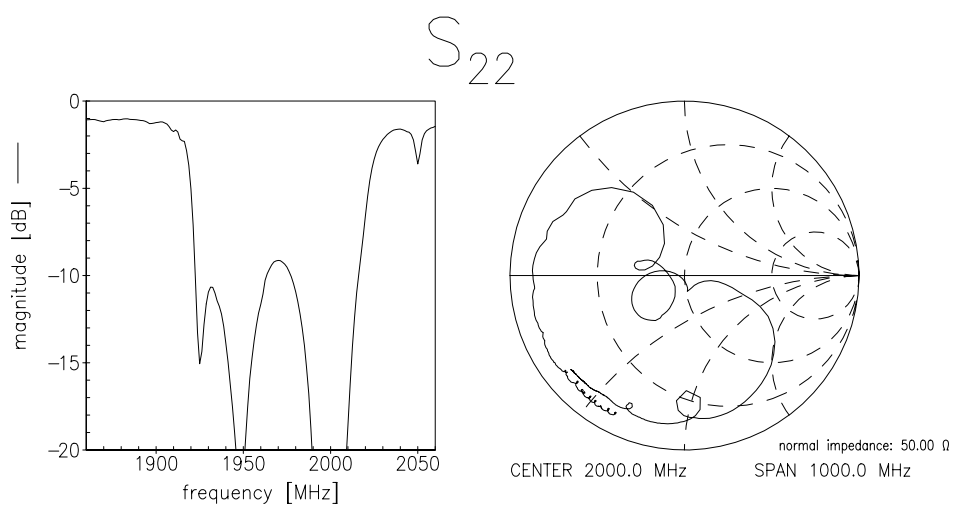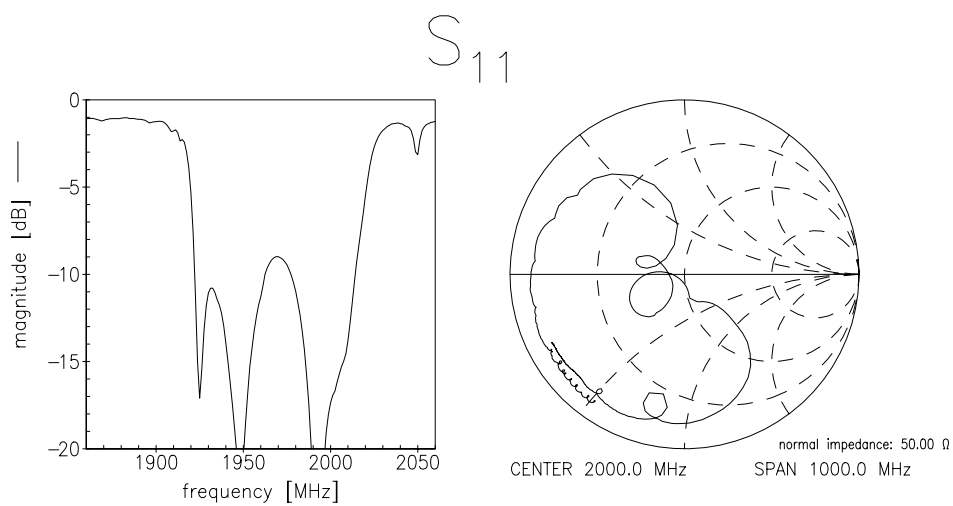



SAW Components	B4135
Low-Loss Filter	1960,00 MHz
Data Sheet	SMD

Published by EPCOS AG

Surface Acoustic Wave Components Division, SAW MC WT

P.O. Box 80 17 09, D-81617 München

© EPCOS AG 2000. All Rights Reserved. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

The information contained in this brochure describes the type of component and shall not be considered as guaranteed characteristics. Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.