

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [22-17-2027](#)  
**Status:** **Active**  
**Overview:** [KK® Interconnection System](#)  
**Description:** 2.54mm Pitch KK® PC Board Connector, Bottom Entry, 0.80µm Gold (Au), 2 Circuits

**Documents:**

[3D Model](#) [Product Specification PS-10-07 \(PDF\)](#)  
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

**Agency Certification**

CSA LR19980  
 UL E29179

**General**


Product Family PCB Receptacles  
 Series [4455](#)  
 Application Board-to-Board, Signal  
 Overview [KK® Interconnection System](#)  
 Product Name KK®  
 UPC 800753737198

**Physical**

Circuits (Loaded) 2  
 Circuits (maximum) 2  
 Color - Resin Natural (White)  
 Durability (mating cycles max) 25  
 Flammability 94V-0  
 Glow-Wire Compliant No  
 Guide to Mating Part No  
 Keying to Mating Part None  
 Lock to Mating Part No  
 Material - Metal Phosphor Bronze  
 Material - Plating Mating Unplated  
 Material - Plating Termination Unplated  
 Material - Resin Nylon  
 Net Weight 0.257/g  
 Number of Rows 1  
 Orientation Bottom Entry  
 PC Tail Length 3.35mm  
 PCB Locator Yes  
 PCB Retention None  
 PCB Thickness - Recommended 1.60mm  
 Packaging Type Tray  
 Pitch - Mating Interface 2.54mm  
 Pitch - Termination Interface 2.54mm  
 Polarized to Mating Part No  
 Polarized to PCB Yes  
 Stackable Yes  
 Surface Mount Compatible (SMC) No  
 Temperature Range - Operating See Product Specification  
 Termination Interface: Style Through Hole

**Electrical**

Current - Maximum per Contact 3.5A, 3.75A, 3A, 4A  
 Grounding to PCB No  
 Voltage - Maximum 250V

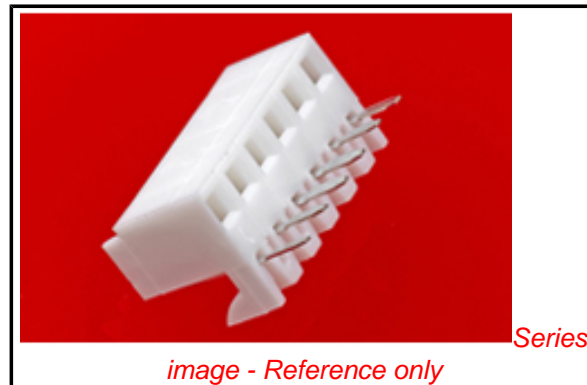

*image - Reference only*

**EU RoHS**

**ELV and RoHS  
 Compliant**

**REACH SVHC**

Not Reviewed

**Low-Halogen Status**

**Not Reviewed**

**China RoHS**



**Need more information on product  
 environmental compliance?**

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
 For a multiple part number RoHS Certificate of  
 Compliance, [click here](#)

Please visit the [Contact Us](#) section for any  
 non-product compliance questions.

**Search Parts in this Series**

[4455Series](#)

**Mates With**

[42153](#) KK® Wire-to-Board Header, [4094](#)  
 KK® Wire-to-Board Header, [42376](#) KK®  
 Header, [42375](#) KK® Header, [42377](#) , [42152](#)  
 KK® Wire-to-Board Header, [4030](#) KK®  
 Wire-to-Board Header, [4380](#) KK® Header

**Solder Process Data**

Duration at Max. Process Temperature (seconds)	5
Lead-free Process Capability	Wave Capable (TH only)
Max. Cycles at Max. Process Temperature	1
Process Temperature max. C	235

**Material Info**

Old Part Number	A-4455-BH02J(228)
-----------------	-------------------

**Reference - Drawing Numbers**

Product Specification	PS-10-07
Sales Drawing	SDA-4455

This document was generated on 06/05/2013

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**