

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [38-00-7594](#)
Status: **Active**
Overview: [KK® Interconnection System](#)
Description: 5.08mm Pitch KK® Header, Vertical, with Polarizing Backwall, 5 Circuits, Tin (Sn) Plating, Circuit 4 Voided

Documents:

[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)
[Product Specification PS-99020-0087 \(PDF\)](#)

Agency Certification

UL E29179

General

Product Family PCB Headers
 Series [2599](#)
 Application Signal, Wire-to-Board
 Overview [KK® Interconnection System](#)
 Product Name KK®
 UPC 800753727724

Physical

Breakaway No
 Circuits (Loaded) 4
 Circuits (maximum) 5
 Color - Resin Natural
 Durability (mating cycles max) 25
 First Mate / Last Break No
 Flammability 94V-2
 Glow-Wire Compliant No
 Guide to Mating Part No
 Keying to Mating Part None
 Lock to Mating Part None
 Material - Metal Brass
 Material - Plating Mating Tin
 Material - Plating Termination Tin
 Material - Resin Nylon
 Net Weight 1.171/g
 Number of Rows 1
 Orientation Vertical
 PC Tail Length 4.45mm
 PCB Locator No
 PCB Retention None
 PCB Thickness - Recommended 1.60mm
 Packaging Type Bag
 Pitch - Mating Interface 5.08mm
 Pitch - Termination Interface 5.08mm
 Plating min - Mating 5.080µm
 Plating min - Termination 5.080µm
 Polarized to Mating Part Yes
 Polarized to PCB No
 Shrouded Partial
 Stackable No
 Surface Mount Compatible (SMC) No
 Temperature Range - Operating See Product Specification
 Termination Interface: Style Through Hole

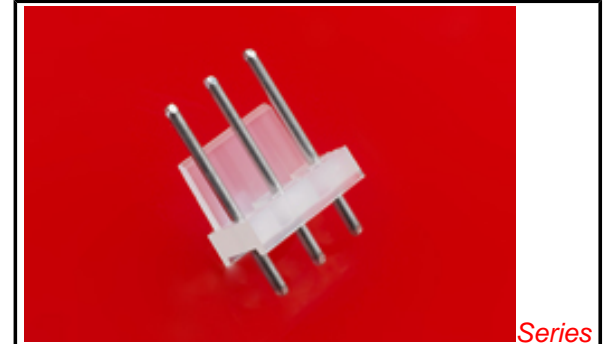


image - Reference only

EU RoHS

**ELV and RoHS
 Compliant**
REACH SVHC
 Not Reviewed
Low-Halogen Status
 Not Reviewed

China RoHS



**Need more information on product
 environmental compliance?**

Email productcompliance@molex.com
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

[2599Series](#)

Electrical

Current - Maximum per Contact	4.5A
Voltage - Maximum	250V

Solder Process Data

Duration at Max. Process Temperature (seconds)	5
Lead-free Process Capability	Wave Capable (TH only)
Max. Cycles at Max. Process Temperature	1
Process Temperature max. C	235

Material Info

Old Part Number	2599M05A04
-----------------	------------

Reference - Drawing Numbers

Product Specification	PS-99020-0087
Sales Drawing	SDAE-2599M-N*

This document was generated on 04/12/2013

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION