


**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [0039316169](#)  
**Status:** **Active**  
**Overview:** [minifit\\_jr](#)  
**Description:** 4.20mm Pitch Mini-Fit Jr.™ Header, Dual Row, Right Angle, with Snap-in Plastic Peg PCB Lock, 16 Circuits, PA Polyamide Nylon 6/6 94V-2, 0.76µm Gold (Au) over Nickel (Ni)

**Documents:**

|                                                         |                                                           |
|---------------------------------------------------------|-----------------------------------------------------------|
| <a href="#">3D Model</a>                                | <a href="#">Packaging Specification PK-5569-002 (PDF)</a> |
| <a href="#">Drawing (PDF)</a>                           | <a href="#">Test Summary TS-5556-002 (PDF)</a>            |
| <a href="#">Product Specification PS-5556-001 (PDF)</a> | <a href="#">RoHS Certificate of Compliance (PDF)</a>      |

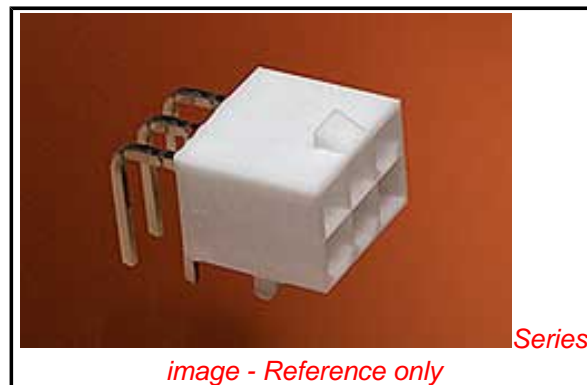

**Agency Certification**

|     |           |
|-----|-----------|
| CSA | LR19980   |
| TUV | R72081037 |
| UL  | E29179    |

**General**

|                |                                                                                                                                                                                                                                                           |
|----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Family | PCB Headers                                                                                                                                                                                                                                               |
| Series         | <a href="#">5569</a>                                                                                                                                                                                                                                      |
| Application    | Power, Wire-to-Board                                                                                                                                                                                                                                      |
| Comments       | Current = 13A max. per circuit when header is mated to a receptacle loaded with <a href="#">45750</a> Mini-Fit® Plus HCS Crimp Terminal Crimped to 16 AWG wire., See Molex Product specification PS-5556001 for additional current de-rating information. |

|              |                            |
|--------------|----------------------------|
| Overview     | <a href="#">minifit_jr</a> |
| Product Name | Mini-Fit Jr.™              |

**Physical**

|                                |             |
|--------------------------------|-------------|
| Breakaway                      | No          |
| Circuits (Loaded)              | 16          |
| Circuits (maximum)             | 16          |
| Color - Resin                  | Black       |
| Durability (mating cycles max) | 30          |
| First Mate / Last Break        | No          |
| Flammability                   | 94V-2       |
| Glow-Wire Compliant            | No          |
| Guide to Mating Part           | No          |
| Keying to Mating Part          | None        |
| Lock to Mating Part            | Yes         |
| Material - Metal               | Brass       |
| Material - Plating Mating      | Tin         |
| Material - Plating Termination | Nickel      |
| Material - Resin               | Nylon       |
| Number of Rows                 | 2           |
| Orientation                    | Right Angle |
| PC Tail Length                 | 3.60mm      |
| PCB Locator                    | Yes         |
| PCB Retention                  | Yes         |
| PCB Thickness - Recommended    | 1.78mm      |
| Packaging Type                 | Bag         |
| Pitch - Mating Interface       | 4.20mm      |
| Pitch - Termination Interface  | 4.20mm      |
| Polarized to Mating Part       | Yes         |
| Polarized to PCB               | Yes         |

**EU RoHS**

**ELV and RoHS Compliant**  
**REACH SVHC Contains SVHC: No**  
**Low-Halogen Status Low-Halogen**

**China RoHS**



**Need more information on product environmental compliance?**

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

**Search Parts in this Series**

[5569Series](#)

**Mates With**

[5557 Mini-Fit Jr.™ Receptacle Housing](#)

|                                |                 |
|--------------------------------|-----------------|
| Shrouded                       | Fully           |
| Stackable                      | No              |
| Surface Mount Compatible (SMC) | No              |
| Temperature Range - Operating  | -40°C to +105°C |
| Termination Interface: Style   | Through Hole    |

#### **Electrical**

|                               |      |
|-------------------------------|------|
| Current - Maximum per Contact | 13A  |
| Voltage - Maximum             | 600V |

#### **Solder Process Data**

|                                                |                        |
|------------------------------------------------|------------------------|
| Duration at Max. Process Temperature (seconds) | 5                      |
| Lead-free Process Capability                   | Wave Capable (TH only) |
| Max. Cycles at Max. Process Temperature        | 1                      |
| Process Temperature max. C                     | 240                    |

#### **Material Info**

|                 |               |
|-----------------|---------------|
| Old Part Number | 5569-16A2G-BL |
|-----------------|---------------|

#### **Reference - Drawing Numbers**

|                         |                           |
|-------------------------|---------------------------|
| Packaging Specification | PK-5569-002               |
| Product Specification   | PS-5556-001, RPS-5556-004 |
| Sales Drawing           | SDA-5569-NA2*-*           |
| Test Summary            | TS-5556-002               |

This document was generated on 03/06/2012

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**