

Distributed Amplifier 18-50 GHz

Rev. V1


Features

- Ultra Wide Band Driver Amplifier
- Fiber Optic Modulator Driver
- 17.0 dB Small Signal Gain
- 5.0 dB Noise Figure
- 30 dB Gain Control
- +15.0 dBm P1dB Compression Point
- 100% On-Wafer RF, DC and Output Power Testing
- 100% Visual Inspection to MIL-STD-883 Method 2010
- RoHS* Compliant and 260°C Reflow Compatible

Description

M/A-COM Tech's 18.0-50.0 GHz GaAs MMIC distributed amplifier has a small signal gain of 17.0 dB with a noise figure of 5.0 dB across the band. The device also includes 30.0 dB gain control and a +15 dBm P1dB compression point. This MMIC uses M/A-COM Tech's GaAs PHEMT device model technology, and is based upon electron beam lithography to ensure high repeatability and uniformity. The chip has surface passivation to protect and provide a rugged part with backside via holes and gold metallization to allow either a conductive epoxy or eutectic solder die attach process. This device is well suited for microwave, millimeter-wave and wideband military applications.

Chip Device Layout

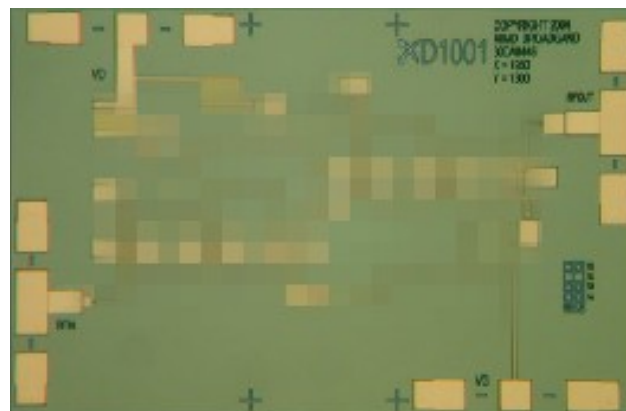

Absolute Maximum Ratings

Parameter	Absolute Max.
Supply Voltage (Vd)	+6.0 VDC
Supply Current (Id)	220 mA
Gate Bias Voltage (Vg)	+0.3 V
Input Power (Pin)	+15 dBm
Storage Temperature (Tstg)	-65 °C to +165 °C
Operating Temperature (Ta)	-55 °C to +85 °C
Channel Temperature (Tch) ¹	+175 °C

(1) Channel temperature affects a device's MTTF. It is recommended to keep channel temperature as low as possible for maximum life.

Ordering Information

Part Number	Package
XD1001-BD-000V	"V" - vacuum release gel paks
XD1001-BD-EV1	evaluation module

Distributed Amplifier 18-50 GHz

Rev. V1







Electrical Specifications: 18-50 GHz (Ambient Temperature T = 25°C)

Parameter	Units	Min.	Typ.	Max.
Input Return Loss (S11) ²	dB	5.0	10.0	-
Output Return Loss (S22) ²	dB	6.0	11.0	-
Small Signal Gain (S21) ²	dB	13.0	17.0	-
Gain Flatness (ΔS_{21})	dB	-	+/-1.0	-
Gain Control	dB	-	30.0	-
Reverse Isolation (S12) ²	dB	30.0	40.0	-
Noise Figure (NF)	dB	-	5.0	-
Output Power for 1dB Compression Point (P1dB) ¹	dBm	-	+15.0	-
Output Third Order Intercept Point (OIP3) ¹	dBm	-	+24.0	-
Drain Bias Voltage (Vd)	VDC	-	+5.0	+5.5
Gain Control Bias (Vg)	VDC	-2.0	0.0	+0.1
Supply Current (Id) (Vd=5.0 V, Vg=-0.0 V Typical)	mA	-	160	190

1. Measured using constant current.






2. Unless otherwise indicated Min/Max over 18.0-50.0 GHz and biased at Vd=5 V, Id=160 mA

Typical Performance Curves (On-Wafer¹)

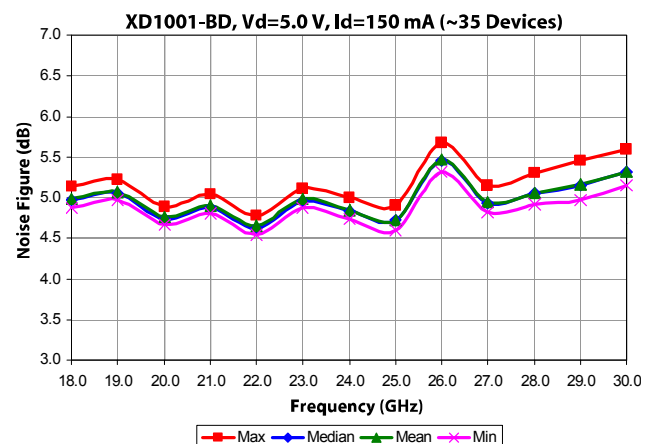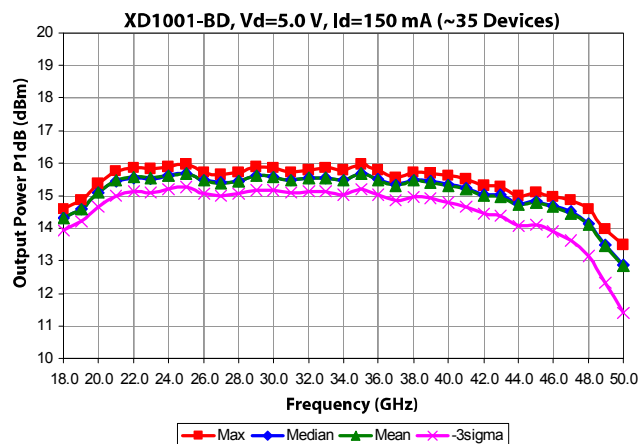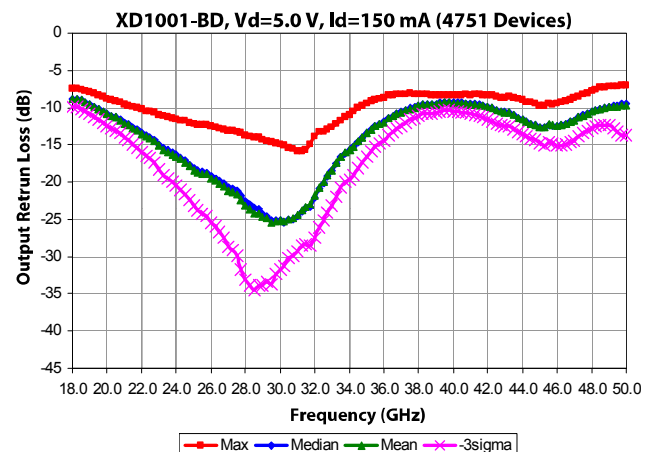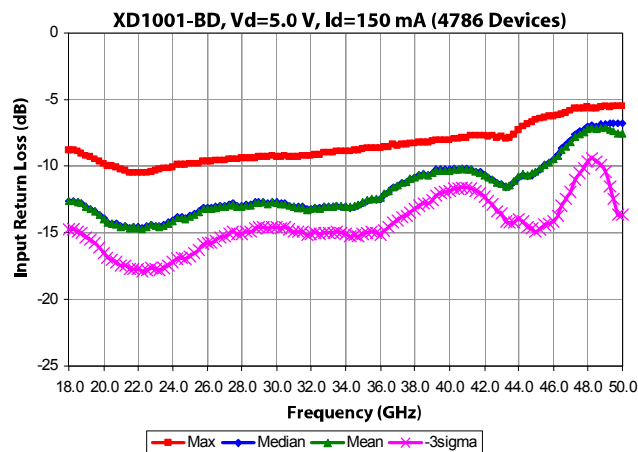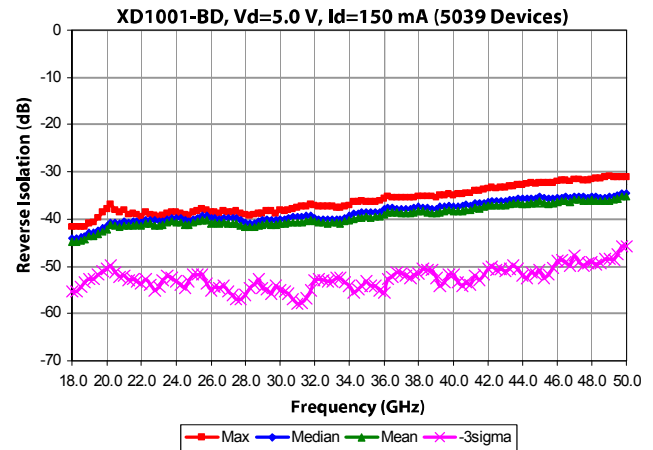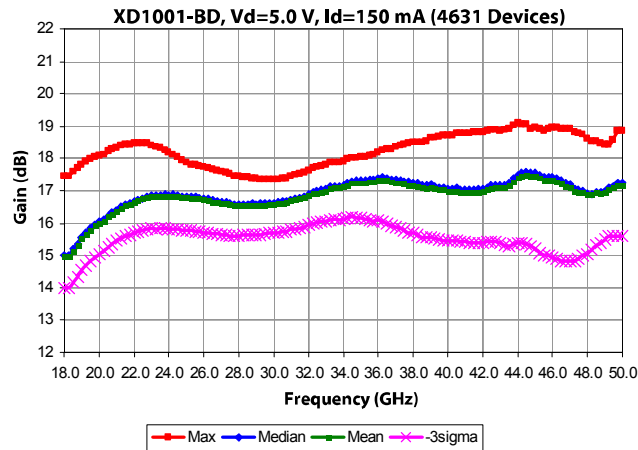

Note [1] Measurements – On-Wafer data has been taken using bias conditions as shown. Measurements are referenced 150 μ m in from RF In/Out pad edge. For optimum performance M/A-COM Tech T-pad transition is recommended. For additional information see the M/A-COM Tech “T-Pad Transition” application note.

Typical Performance Curves (On-Wafer¹) (cont.)

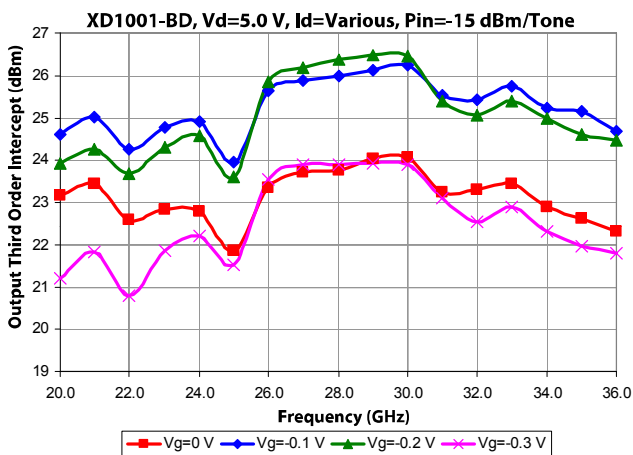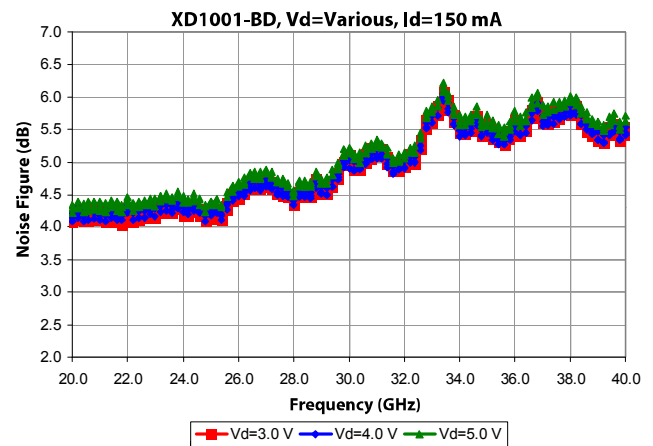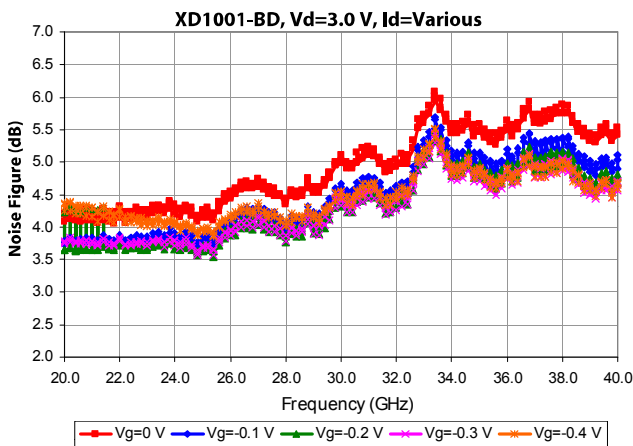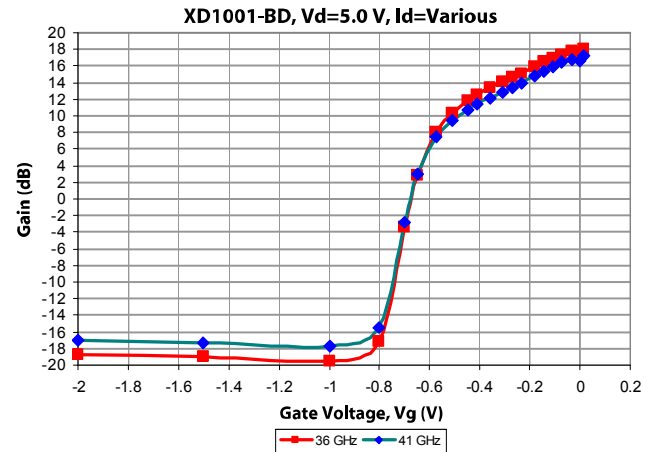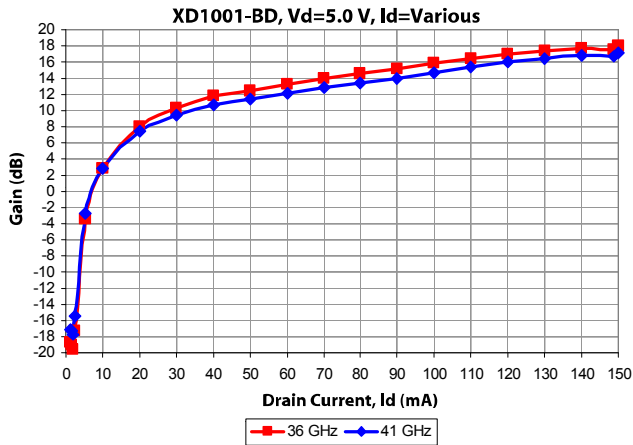

Note [1] Measurements – On-Wafer data has been taken using bias conditions as shown. Measurements are referenced 150 μ m in from RF In/Out pad edge. For optimum performance M/A-COM Tech T-pad transition is recommended. For additional information see the M/A-COM Tech “T-Pad Transition” application note.

Distributed Amplifier 18-50 GHz

Rev. V1

S-Parameters (On-Wafer¹)


Typical S-Parameter Data for XD1001-BD

Vd=5.0 V, Id=149 mA

Frequency (GHz)	S11 (Mag)	S11 (Ang)	S21 (Mag)	S21 (Ang)	S12 (Mag)	S12 (Ang)	S22 (Mag)	S22 (Ang)
14.0	0.339	-105.95	4.484	-64.44	0.0024	151.71	0.566	42.43
15.0	0.318	-109.42	4.959	-81.25	0.0029	146.08	0.536	29.71
16.0	0.296	-113.59	5.454	-98.28	0.0036	142.13	0.504	16.92
17.0	0.277	-118.09	5.957	-115.37	0.0043	129.03	0.469	3.70
18.0	0.263	-122.98	6.452	-132.70	0.0050	119.05	0.427	-9.98
19.0	0.248	-128.13	6.886	-150.61	0.0056	106.79	0.379	-24.20
20.0	0.227	-130.91	7.221	-168.63	0.0065	94.16	0.325	-38.39
21.0	0.219	-133.08	7.502	-173.62	0.0068	78.94	0.271	-53.12
22.0	0.218	-136.80	7.627	-155.96	0.0073	65.41	0.218	-66.82
23.0	0.222	-139.91	7.672	-138.78	0.0077	50.14	0.170	-79.26
24.0	0.225	-143.34	7.656	-122.19	0.0075	37.52	0.129	-89.38
25.0	0.233	-150.18	7.596	-106.11	0.0079	18.78	0.096	-98.45
26.0	0.242	-157.65	7.519	-90.71	0.0074	5.49	0.070	-103.92
27.0	0.250	-164.41	7.465	-75.62	0.0078	-6.83	0.059	-103.19
28.0	0.249	-172.29	7.404	-60.84	0.0078	-24.58	0.055	-99.36
29.0	0.248	-178.25	7.394	-46.58	0.0077	-41.51	0.060	-99.54
30.0	0.249	-177.08	7.445	-32.02	0.0071	-55.57	0.083	-106.68
31.0	0.252	-171.40	7.507	-17.23	0.0073	-69.66	0.108	-120.07
32.0	0.252	-168.86	7.606	-2.06	0.0075	-85.07	0.141	-130.95
33.0	0.251	-169.12	7.695	-13.87	0.0079	-104.67	0.178	-143.90
34.0	0.268	-165.08	7.704	-29.86	0.0075	-121.74	0.211	-159.27
35.0	0.291	-161.35	7.655	-45.93	0.0079	-135.09	0.243	-172.40
36.0	0.307	-159.48	7.542	-62.26	0.0079	-152.32	0.275	-174.70
37.0	0.331	-156.28	7.423	-78.77	0.0088	-165.75	0.305	-163.36
38.0	0.370	-150.02	7.168	-94.50	0.0083	-172.51	0.334	-151.74
39.0	0.384	-144.92	6.983	-109.65	0.0090	-160.60	0.351	-139.42
40.0	0.380	-139.70	6.920	-125.06	0.0080	-145.41	0.352	-129.53
41.0	0.390	-136.35	6.827	-140.84	0.0087	-134.33	0.352	-121.51
42.0	0.399	-132.68	6.827	-156.36	0.0090	-119.70	0.345	-112.70
43.0	0.407	-128.89	6.929	-172.64	0.0091	-106.25	0.331	-106.19
44.0	0.417	-126.10	7.019	-169.64	0.0093	-91.50	0.325	-100.85
45.0	0.407	-124.13	6.992	-150.34	0.0094	-78.26	0.313	-94.96
46.0	0.402	-124.74	6.884	-131.08	0.0097	-58.70	0.302	-93.66
47.0	0.436	-122.89	6.794	-112.53	0.0099	-33.85	0.306	-88.79
48.0	0.438	-121.54	6.696	-92.46	0.0095	-21.18	0.285	-82.69
49.0	0.426	-118.51	6.662	-70.96	0.0098	-2.17	0.278	-78.04
50.0	0.412	-114.78	7.002	-45.72	0.0101	-25.75	0.258	-68.40

Note [1] S-Parameters – On-Wafer S-Parameters have been taken using bias conditions as shown. Measurements are referenced 150 μ m in from RF In/Out pad edge.

Mechanical Drawing

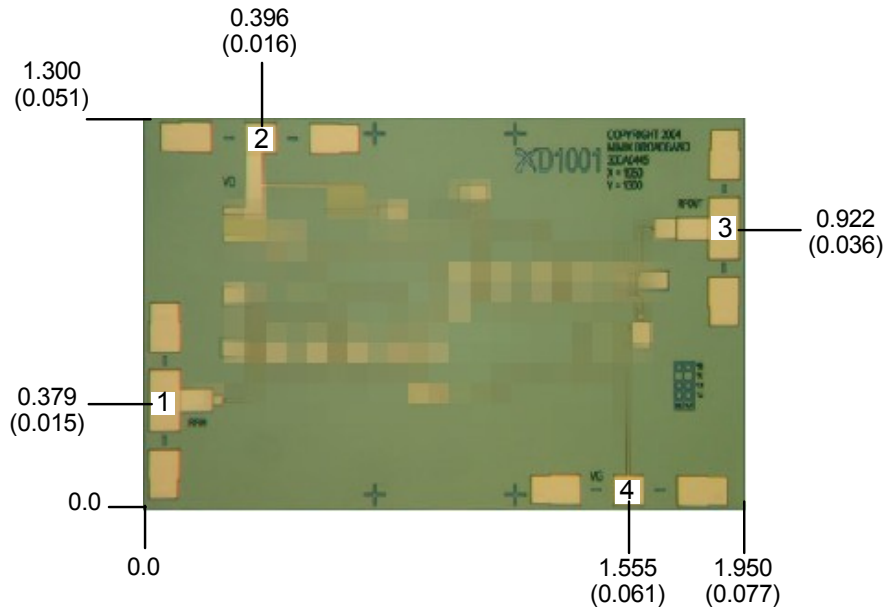



(Note: Engineering designator is 30DA0445)

Units: millimeters (inches) Bond pad dimensions are shown to center of bond pad.
 Thickness: 0.110 +/- 0.010 (0.0043 +/- 0.0004), Backside is ground, Bond Pad/Backside Metallization: Gold
 All DC Bond Pads are 0.100 x 0.100 (0.004 x 0.004). All RF Bond Pads are 0.100 x 0.200 (0.004 x 0.008)
 Bond pad centers are approximately 0.109 (0.004) from the edge of the chip.
 Dicing tolerance: +/- 0.005 (+/- 0.0002). Approximate weight: 1.572 mg.

Bond Pad #1 (RF In)
 Bond Pad #2 (Vd)





Bond Pad #3 (RF Out)
 Bond Pad #4 (Vg)

Bias Arrangement

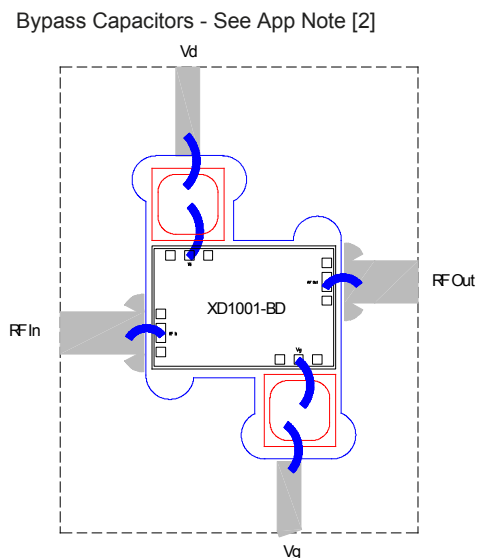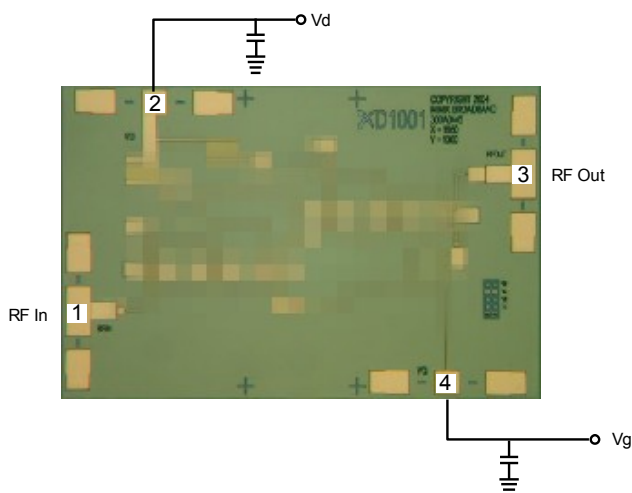

MTTF


These numbers were calculated based upon accelerated life test information received from the fabricating foundry and extensive thermal modeling/finite element analysis done at M/A-COM Tech. The values shown here are only to be used as a guideline against the end application requirements and only represent reliability information under one bias condition. Ultimately bias conditions and resulting power dissipation along with the practical aspects, i.e. thermal material stack-up, attach method of die placement are the key parts in determining overall reliability for a specific application, see previous pages. If the data shown below does not meet your reliability requirements or if the bias conditions are not within your operating limits please contact technical sales for additional information.

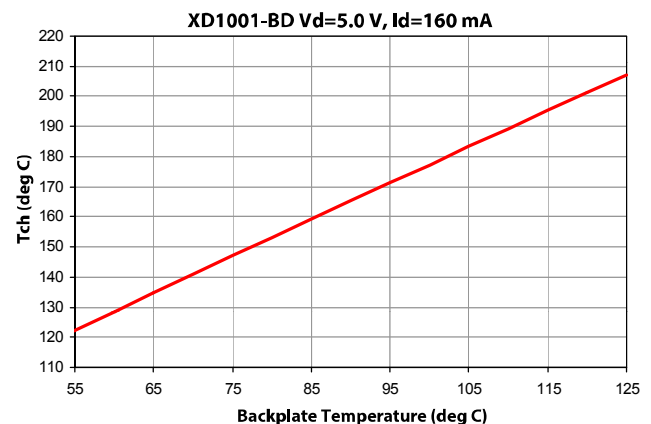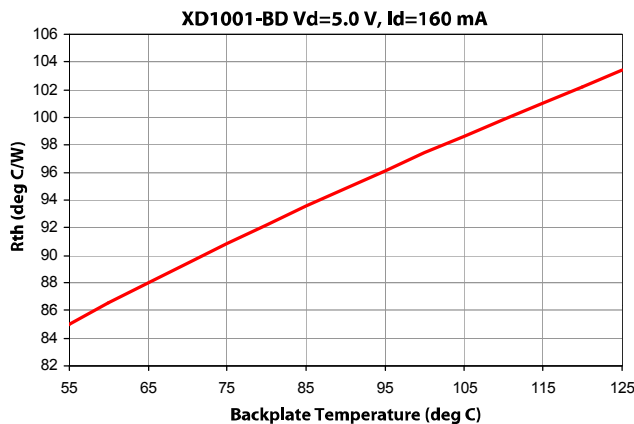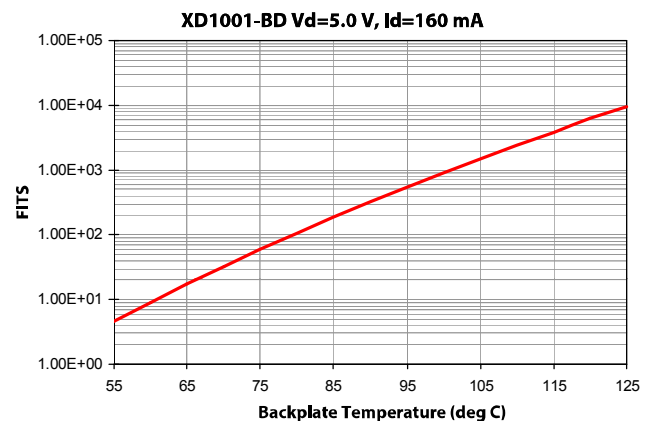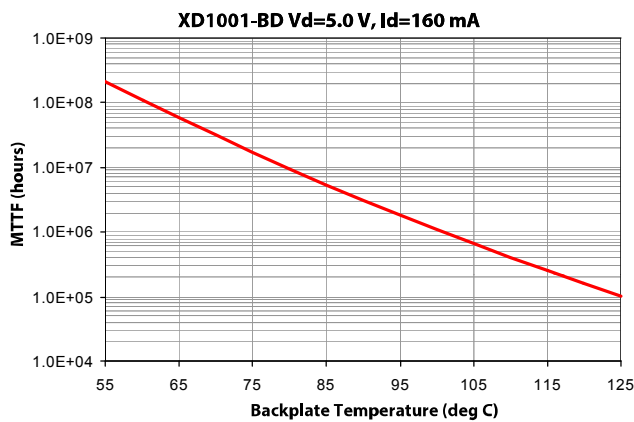

Distributed Amplifier 18-50 GHz

Rev. V1

App Note [1] Biasing - As shown in the bonding diagram, this device is operated with a single drain and a gain control voltage. Maximum gain bias is nominally $V_d=5.0V$, $V_g=0V$, $I_d=160mA$. Gain can be adjusted by changing V_g . It is recommended to use active biasing to keep the currents constant as the RF power and temperature vary; this gives the most reproducible results. Depending on the supply voltage available and the power dissipation constraints, the bias circuit may be a single transistor or a low power operational amplifier, with a low value resistor in series with the drain supply used to sense the current. The gate of the pHEMT is controlled to maintain correct drain current and thus drain voltage. The typical gate voltage needed to do this is $0.0V$. Typically the gate is protected with Silicon diodes to limit the applied voltage. Also, make sure to sequence the applied voltage to ensure negative gate bias is available before applying the positive drain supply.

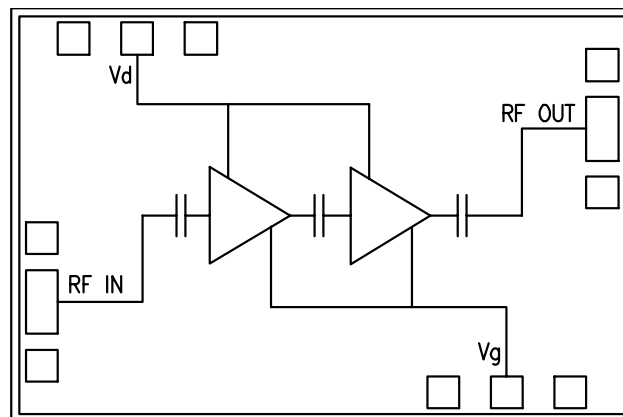

App Note [2] Bias Arrangement - Each DC pad (V_d and V_g) needs to have DC bypass capacitance ($\sim 100-200$ pF) as close to the device as possible. Additional DC bypass capacitance (~ 0.01 μF) is also recommended.

Handling Procedures

Please observe the following precautions to avoid damage:

Static Sensitivity

Gallium Arsenide Integrated Circuits are sensitive to electrostatic discharge (ESD) and can be damaged by static electricity. Proper ESD control techniques should be used when handling these class 2 devices.

M/A-COM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with M/A-COM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.