

AC/DC converter


BP5081A15

AC100V input, output-1 : 15V/80mA, output-2 : 5V/350mA

Absolute Maximum Ratings

Parameter	Symbol	Limits	Unit
Input voltage	V_i	170	V
Maximum Output current(15V)	I_{15MAX}	80	mA
Maximum Output current(5V)	I_5MAX	350	mA
ESD endurance	V_{surge}	2	kV
Maximum surface temperature	T_{cmax}	105	°C
Operating temperature range	T_{opr}	-25 to +80	°C
Storage temperature range	T_{stg}	-25 to +105	°C

Dimensions(Unit : mm)

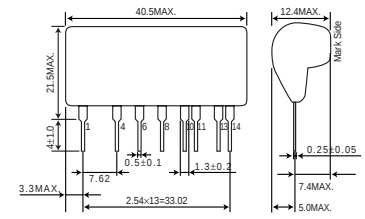


Electrical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Input voltage	V_i	113	141	170	V	DC
Output voltage1	V_{15}	14.0	15.0	16.0	V	$V_i=141V, I_{15}=80mA$
Output current1	I_{15}	0	—	80	mA	$V_i=141V$ *1
Output voltage2	V_5	4.7	5.0	5.3	V	$V_i=141V, I_5=200mA$
Output current2	I_5	0	—	350	mA	$V_i=141V$ *1
Line regulation1	V_{r1}	—	0.1	0.2	V	$V_i=113$ to $170V, I_{15}=80mA$
Line regulation2	V_{r2}	—	0.1	0.2	V	$V_i=113$ to $170V, I_5=350mA$
Load regulation1	V_{l1}	—	0.05	0.2	V	$V_i=141V, I_{15}=0$ to $80mA$ *2
Load regulation2	V_{l2}	—	0.05	0.2	V	$V_i=141V, I_5=0$ to $350mA$ *2
Output ripple voltage1	V_{p1}	—	0.05	0.2	Vp-p	$V_i=141V, I_{15}=80mA, I_5=0mA$
Output ripple voltage2	V_{p2}	—	0.05	0.2	Vp-p	$V_i=141V, I_{15}=0mA, I_5=350mA$
Power conversion efficiency1	η_1	65	72	—	%	$V_i=141V, I_{15}=80mA, I_5=0mA$ *2
Power conversion efficiency2	η_2	60	65	—	%	$V_i=141V, I_{15}=0mA, I_5=350mA$ *2


*1 Maximum output current varies depending on ambient temperature ; please refer to derating curve.

*2 Please refer to Load regulation, Conversion efficiency.

Derating Curve

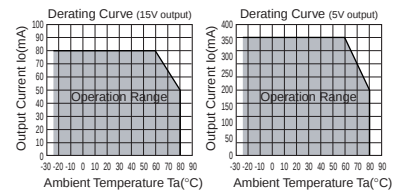


Conversion Efficiency

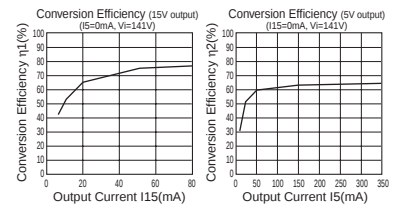

Application circuit

BP5081A15

Be sure to use fuse for safety.

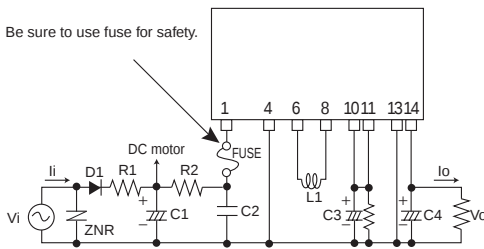

Pin No.	Function
1	Input terminal V_i (141VDC)
2	Not used
3	Not used
4	COMMON
5	Not used
6	Choke coil connect
7	Not used
8	Choke coil connect
9	Not used
10	15V output terminal
11	15V input terminal
12	Not used
13	COMMON
14	Output terminal V_o (5V)

For actual usage, Please kindly evaluate and confirm our part mounted in your product, Especially, Please make sure to confirm whether the load current exceed Max. rated current by using the current probe.

External components setting

FUSE: FUSE

C1: Input capacitor

C2: Noise removal capacitor

C3: Output capacitor
(For 15V output)

C4: Output capacitor
(For 5V output)

L1: Power inductor

D1: Rectifier diode

R1: Rush current limitation
resistance

R2: Noise removal resistor

ZNR: Varistor

Recommend the use of fast-acting type fuse 1.0A.

Rated voltage : More than 200V

Capacity : 22 to 820 μ F

Rated ripple current : More than 0.13Arms

Rated voltage : More than 200V

film capacitor, or Ceramics Capacitor

Capacity : 0.1 to 0.22 μ F

Rated voltage : More than 25V

Capacity : 100 to 1000 μ F, low impedance type

ESR : Less than 0.4 Ω

Rated ripple current : More than 0.25Arms

Evaluate it with the actual opportunity because it influences an output ripple voltage.

Rated voltage : More than 16V

Capacity : 100 to 1000 μ F, low impedance type

ESR : Less than 0.4 Ω

Rated ripple current : More than 0.41Arms

Evaluate it with the actual opportunity because it influences an output ripple voltage.

Inductance : 1.0mH

Rated current : More than 0.49A

Peak reverse voltage : More than 400V

Mean rectifying current : More than 1.0A

Peak forward surge current : More than 40A

This product can use even all the wave rectification.


Rush current flows corresponding to the capacity of C1.

Select electric power and resistance value corresponding to the start character of the module.


Resistance : 10 to 22 Ω , Power : More than 1/4W

Be sure to use it to protect this product from thunder surge and the static electricity.

Load Regulation

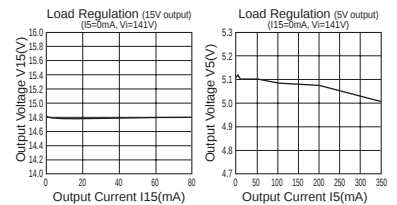

Surface Temperature Rising

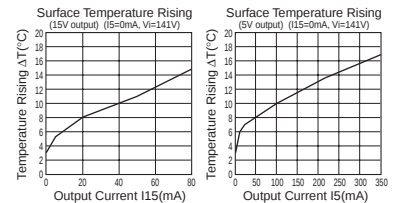

Power Module Usage Precautions

Safety Precautions

- 1) The products are designed and manufactured for use in ordinary electronic equipment (i.e. AV/OA/telecommunication/amusement equipment, home appliances). Please consult with the Company's (ROHM) sales staff if intended for use in devices requiring high reliability (e.g. medical/transport/aircraft/spacecraft equipment, nuclear power/fuel controllers, automotive/safety devices) and whose malfunction may result in injury or death. In this case, failsafe measures must be taken, including the following:
 - [a] Installation of protection circuits in order to improve system safety
 - [b] Incorporation of redundant circuits in the case of single-circuit failure
- 2) The products are designed for use under normal conditions. Application in special environments can cause a deterioration in product performance. Therefore, verification and confirmation of product performance, prior to use, is recommended. The following environments are considered to be 'special':
 - [a] Outdoors, exposed to direct sunlight or dust
 - [b] In contact with liquids, such as water, oils, chemicals, or organic solvents
 - [c] In areas where exposure to the sea air or corrosive gases (i.e. Cl₂, H₂S, NH₃, SO₂, NO₂) can occur
 - [d] In places where the products may be in contact with static electricity or electromagnetic waves
 - [e] In proximity to heat-producing items, plastic cords, or flammable materials
 - [f] In contact with sealing or coating products, such as resin
 - [g] In contact with unclean solder or exposed to water or water-soluble cleaning agents used after soldering
 - [h] In areas where dew condensation occurs
- 3) The products are not designed to be radiation resistant
- 4) The Company is not responsible for any problems resulting from use of the products under conditions not recommended herein.
- 5) The Company should be notified of any product safety issues. Moreover, product safety issues should be periodically monitored by the customer.

Application Notes

- 1) A sufficient margin must be allowed if changes are made to the peripheral circuit due to variations in the inherent tolerances of the external components as well as transient and static characteristics. In addition, please be aware that the Company has not conducted investigations on whether or not particular changes in the example application circuits would result in patent infringement.
- 2) The application examples, their constants, and other types of information contained herein are applicable only when the products are used in accordance with standard methods.
Therefore, if mass production is intended, sufficient consideration to external conditions must be made.

Notes Regarding Industrial Property

- 1) The specifications included herein contain information related to the Company's industrial property. Their use other than pertaining to the relevant products is forbidden. Duplication and/or disclosure to a third party without express written permission is strictly prohibited.
- 2) Product information and data, including application examples, contained in the specifications are for reference purposes only; the Company does not guarantee the industrial/intellectual property rights or any other rights of a third party. Accordingly, the Company shall not bear responsibility for:
 - [a] Infringement of the intellectual property rights of a third party
 - [b] Problems arising from the use of the products listed herein
- 3) The Company prohibits the purchaser from exercising or using the intellectual/industrial property rights or any rights belonging to or are controlled by the Company, other than the right to use, sell, or dispose of the products.

Notes

- No technical content pages of this document may be reproduced in any form or transmitted by any means without prior permission of ROHM CO.,LTD.
- The contents described herein are subject to change without notice. The specifications for the product described in this document are for reference only. Upon actual use, therefore, please request that specifications to be separately delivered.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard use and operation. Please pay careful attention to the peripheral conditions when designing circuits and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or otherwise dispose of the same, no express or implied right or license to practice or commercially exploit any intellectual property rights or other proprietary rights owned or controlled by
- ROHM CO., LTD. is granted to any such buyer.
- Products listed in this document are no antiradiation design.

The products listed in this document are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).

Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

About Export Control Order in Japan

Products described herein are the objects of controlled goods in Annex 1 (Item 16) of Export Trade Control Order in Japan.

In case of export from Japan, please confirm if it applies to "objective" criteria or an "informed" (by MITI clause) on the basis of "catch all controls for Non-Proliferation of Weapons of Mass Destruction.