


PXS410/02/06S Datasheet

 [View Product Page](#)

Product Name // 400 Series Smart Connector, Socket, Overmould pre-wired Connector, 02 M Cable

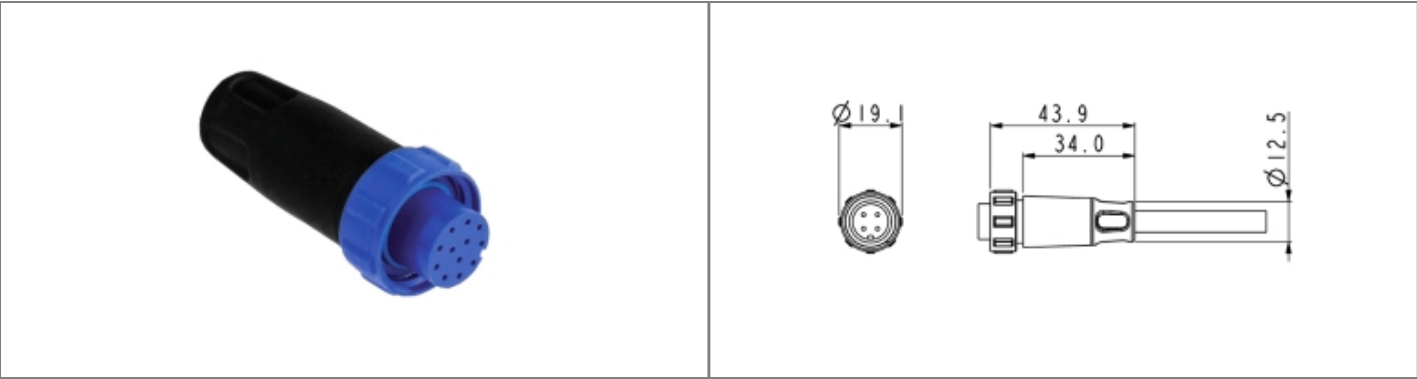

// Product Description:

- | | |
|--|--|
| <ul style="list-style-type: none">400 Series Smart Overmould Prewired Connectors1 - wire EEPROM chipWater and dustproof to IP67 when mated with compatible connector | <ul style="list-style-type: none">Pin or Socket4, 6, 8, 10 & 12 ContactChoice of Sealing Caps available separately to maintain IP rating of unmated connectors |
|--|--|

// General Information:

Product Display Title:	400 Series Smart Overmould Prewired Connectors
Product Family:	Circular Power Connectors
Product Series:	400 Series Buccaneer
Body Material:	Polyurethane (PU)
Cable Length:	2m
Contact Type:	Socket Contact
Coupling Type:	Screw
Current Max:	5A
Flamability Rating:	UL94V-HB
Function:	Flex Smart Connector Single Ended Cable
Ip Rating:	IP67
Max Operating Temperature:	+85°C
Min Operating Temperature:	-20°C
Number Of Contacts:	6 Contacts
Voltage Max:	125V

// Product PDF Links

 [400 Series Technical Product Data](#)

// Product 3D CAD Model Links

 [PXS410/02/06S3D CAD Model](#)



Have a question or project enquiry
you'd like to talk to us about?



[Click Here To Contact Us](#)