

Disconnect terminal block - URK-ND 2 - 0701095


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Disconnect terminal block, Connection method: Screw connection, Cross section: 0.5 mm² - 16 mm², AWG: 20 - 8, Width: 10.2 mm, Mounting type: NS 35/7,5, NS 35/15, NS 32, Color: gray



Key commercial data

Packing unit	1 pc
GTIN	 4 017918 003609
Weight per Piece (excluding packing)	36.96 GRM
Custom tariff number	85369010
Country of origin	Germany

Technical data

General

Number of levels	1
Number of connections	2
Color	gray
Insulating material	PA
Inflammability class according to UL 94	V0
Rated surge voltage	8 kV
Pollution degree	3
Surge voltage category	III
Insulating material group	I
Connection in acc. with standard	IEC 60947-7-1
Maximum load current (lower level)	76 A
Additional text	with 16 mm ² conductor cross section
Nominal current I _N (lower level)	76 A

Disconnect terminal block - URK-ND 2 - 0701095

Technical data

General

Nominal voltage U_N	800 V
Open side panel	ja

Dimensions

Length	64 mm
Width	10.2 mm
Height NS 35/7,5	43.5 mm
Height NS 35/15	51 mm
Height NS 32	48.5 mm

Connection data

Conductor cross section solid min.	0.5 mm ²
Conductor cross section solid max.	16 mm ²
Conductor cross section stranded min.	0.5 mm ²
Conductor cross section stranded max.	10 mm ²
Conductor cross section AWG/kcmil min.	20
Conductor cross section AWG/kcmil max	6
Conductor cross section stranded, with ferrule without plastic sleeve min.	0.5 mm ²
Conductor cross section stranded, with ferrule without plastic sleeve max.	10 mm ²
Conductor cross section stranded, with ferrule with plastic sleeve min.	0.5 mm ²
Conductor cross section stranded, with ferrule with plastic sleeve max.	6 mm ²
2 conductors with same cross section, solid min.	0.5 mm ²
2 conductors with same cross section, solid max.	4 mm ²
2 conductors with same cross section, stranded min.	0.5 mm ²
2 conductors with same cross section, stranded max.	4 mm ²
2 conductors with same cross section, stranded, ferrules without plastic sleeve, min.	0.5 mm ²
2 conductors with same cross section, stranded, ferrules without plastic sleeve, max.	2.5 mm ²
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, min.	0.5 mm ²
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, max.	6 mm ²
Connection method	Screw connection
Stripping length	15 mm
Screw thread	M4
Tightening torque, min	1.5 Nm
Tightening torque max	1.8 Nm

Disconnect terminal block - URK-ND 2 - 0701095

Classifications

eCl@ss

eCl@ss 4.0	27141126
eCl@ss 4.1	27141126
eCl@ss 5.0	27141126
eCl@ss 5.1	27141126
eCl@ss 6.0	27141126
eCl@ss 7.0	27141126
eCl@ss 8.0	27141126

ETIM

ETIM 2.0	EC000902
ETIM 3.0	EC000902
ETIM 4.0	EC000902
ETIM 5.0	EC000902

UNSPSC

UNSPSC 6.01	30211811
UNSPSC 7.0901	39121410
UNSPSC 11	39121410
UNSPSC 12.01	39121410
UNSPSC 13.2	39121410

Approvals

Approvals

Approvals

CSA / UL Recognized / cUL Recognized / GOST / GOST / cULus Recognized

Ex Approvals

Approvals submitted

Approval details

Disconnect terminal block - URK-ND 2 - 0701095

Approvals

CSA	
mm ² /AWG/kcmil	18-6
Nominal current IN	65 A
Nominal voltage UN	600 V

UL Recognized	
mm ² /AWG/kcmil	24-6
Nominal current IN	65 A
Nominal voltage UN	600 V

cUL Recognized	
mm ² /AWG/kcmil	24-6
Nominal current IN	65 A
Nominal voltage UN	600 V

GOST	
------	--


GOST	
------	--

cULus Recognized	
------------------	--

Drawings

Disconnect terminal block - URK-ND 2 - 0701095

Circuit diagram

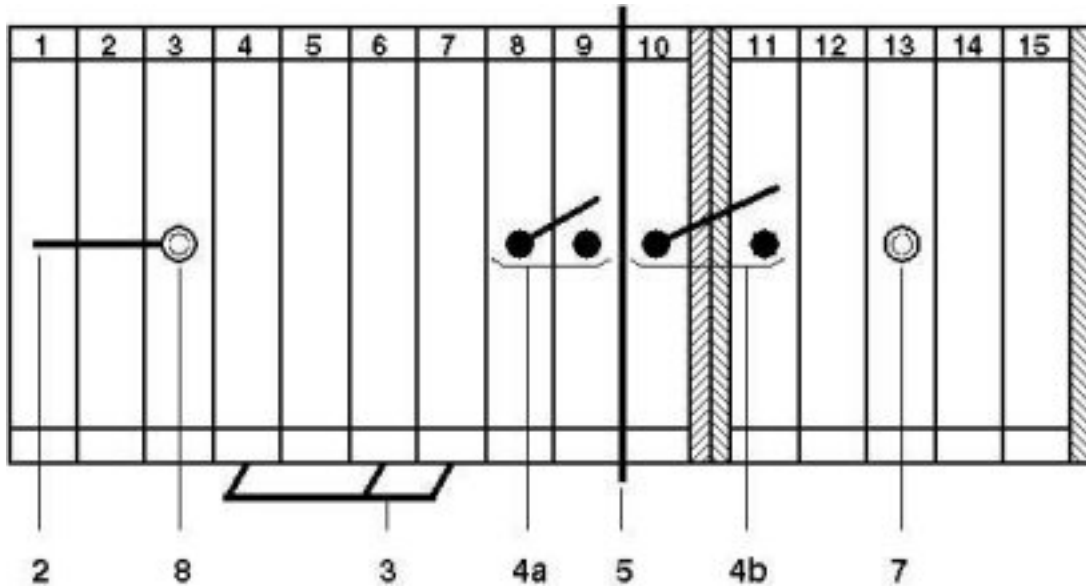

- 2 = fixed bridge
- 3 = insertion bridge
- 4a = switch bar for 2 terminal blocks, short link
- 4b = switch bar for 2 terminal blocks, long link, 2 cover between
- 5 = separating plate, for visual and electrical separation of terminal groups
- 7 = test plug socket
- 8 = test plug socket, insulated