
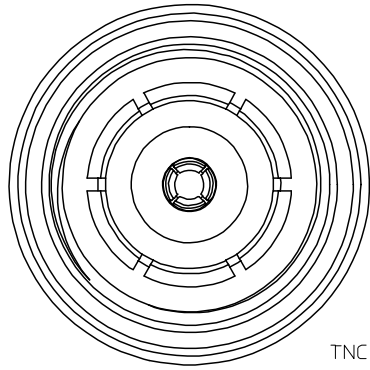


MATERIALS AND FINISHES


BODY, COUPLING NUT: BRASS
PLATED NICKEL

CONTACT: PHOSPHOR BRONZE
PLATED GOLD

INSULATOR: TEFLON




TNC PLUG
POLARIZED
INTERFACE

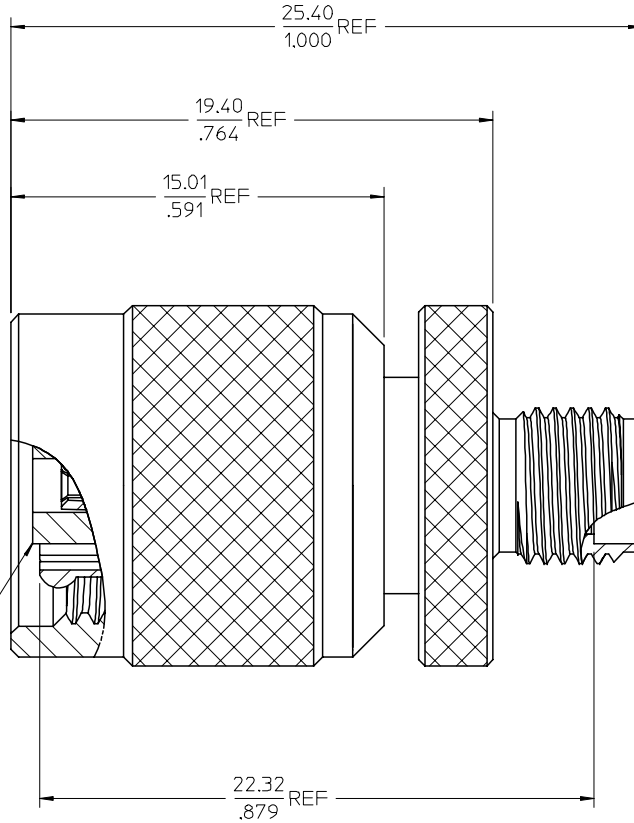

SMA JACK
INTERFACE

Ø 14.50 REF
.571

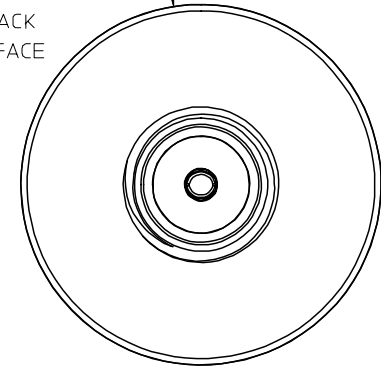

MIL-STD-348A, FIG. 310.2	INTERFACE SMA
SPECIFICATION	DESCRIPTION

CHG: RELEASE
DRAWING.

FC NO: URF2008-0094
DRAWN: ARROBERTSON 2007/08/13
CHKD: 2007/08/13
APPR: JIM ENEER 2007/08/13

QUALITY SYMBOLS
▽=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)	
mm	INCH
4 PLACES ± .004	± .0001
3 PLACES ± .005	± .0002
2 PLACES ± .007	± .0003
1 PLACE ± .010	± .0004
ANGULAR ± 2 °	

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE	
MM/IN	SCALE
DRAWN BY AZR	DATE 2008/08/08
CHECKED BY SSS	DATE 2008/08/08
APPROVED BY JDW	DATE 2008/08/08
MATERIAL NO. 733861250	DOCUMENT NO. SD-73386-125

DESIGN UNITS	THIRD ANGLE PROJECTION
METRIC	THIRD ANGLE PROJECTION
BSA, TNC PLUG POLARIZED TO SMA JACK 50 OHMS BSA-TNC/SMA, EWR-3415	
molex MOLEX INCORPORATED	
SHEET NO. 1 OF 1	