


DATE	SYM	REVISION RECORD	AUTH.	DR.	CK.
5/6/97	-	ISSUED		NT	MM
5/16/02	1	UPDATE PLATING SPEC.		NT	DG
5/20/04	2	PLATING 06 HAS BEEN REPLACED BY 063	OI	NT	OI

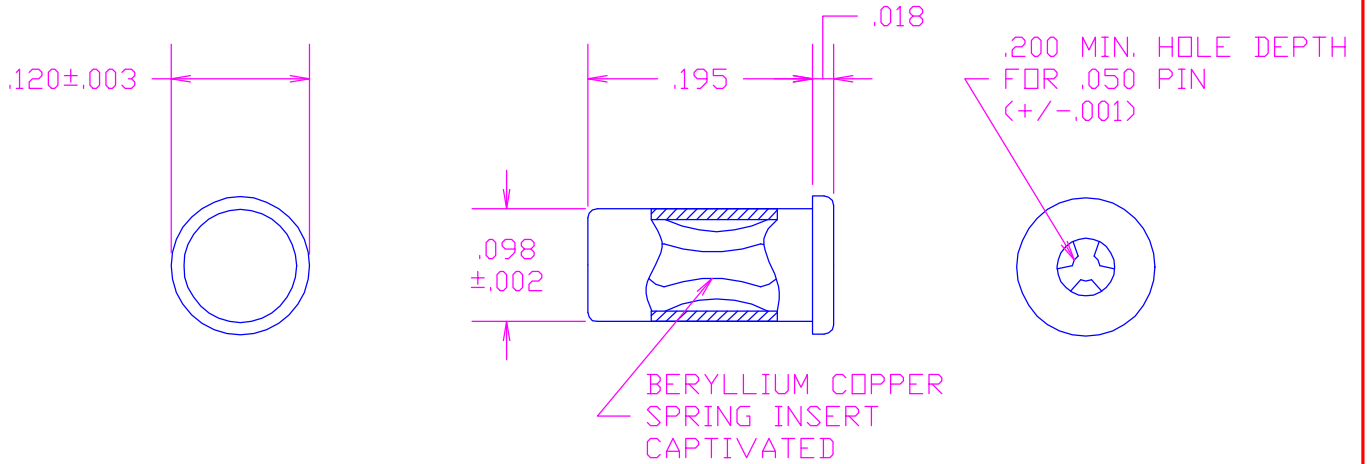

RECOMMENDED MOUNTING HOLE .102+/- .002 (#38 DRILL)
 BOARD THICKNESS .031 TO .156

FINISH CODE	COMPONENT	MATERIAL	FINISH
03	BODY	BRASS PER ASTM B16	.000010" GOLD PER ASTM B 488, TYPE II, CODE C, OVER .0001" NICKEL PER AMS-QQ-N-290
	SPRING	BERYLLIUM COPPER PER ASTM B194	.000030" GOLD PER ASTM B 488, TYPE II, CODE C OVER .0001" NICKEL PER AMS-QQ-N-290
04	BODY	BRASS PER ASTM B16	.0001" ELECTRO-TIN PER ASTM B545, OVER .0001" NICKEL
	SPRING	BERYLLIUM COPPER PER ASTM B194	.0002" BRIGHT ELECTRO-TIN PER ASTM B545, OVER .000050" NICKEL
063	BODY	BRASS PER ASTM B16	.0002" BRIGHT 93%-7% TIN-LEAD PER ASTM B545, OVER .0001" NICKEL PER AMS-QQ-N-290
	SPRING	BERYLLIUM COPPER PER ASTM B194	.000030" GOLD PER ASTM B 488, TYPE II, CODE C OVER .0001" MIN. NICKEL PER AMS-QQ-N-290

ACTUAL SIZE



TOLERANCES (EXCEPT AS NOTED)	CONCORD ELECTRONICS CORPORATION		
DECIMAL + .010 - .010	P/N	SCALE	30 GREAT JONES ST. NEW YORK N.Y. 10012
FRACTIONAL + 1/64 - 1/64	TITLE P.C. JACK FOR .050 PIN		
ANGULAR + -	DATE 12-28-95	DRAWING NUMBER 09-9061-1-XX	