

Number of contacts

48




Male connectors

Identification	Number of contacts	Contact arrangement	Part No.	Performance levels according to IEC 60 603-2. Explanation chapter 00		
			3	2	1	
Male connector with angled solder pins						
Row separation termination side 5.08 mm ①	48		09 05 148 7921	09 05 148 6921 09 05 348 6921 ^{b)} 09 05 648 6921 ^{c)}	09 05 148 2921 09 05 648 2921 ^{c)}	
	46 + 2 [▲]			09 05 148 6951		
Row separation termination side 2.54 mm ②	48		09 05 148 7931	09 05 148 6931	09 05 148 2931	
	46 + 2 [▲]			09 05 148 6961		


DIN Power
to 6 A

Dimensions

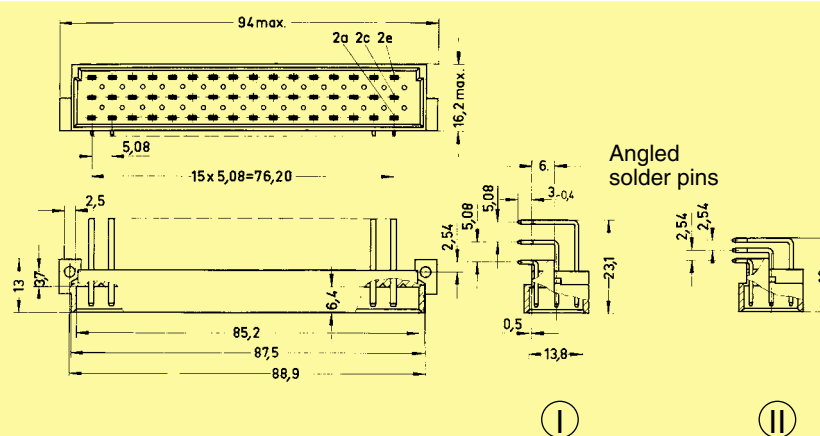

Board drillings

Mounting side

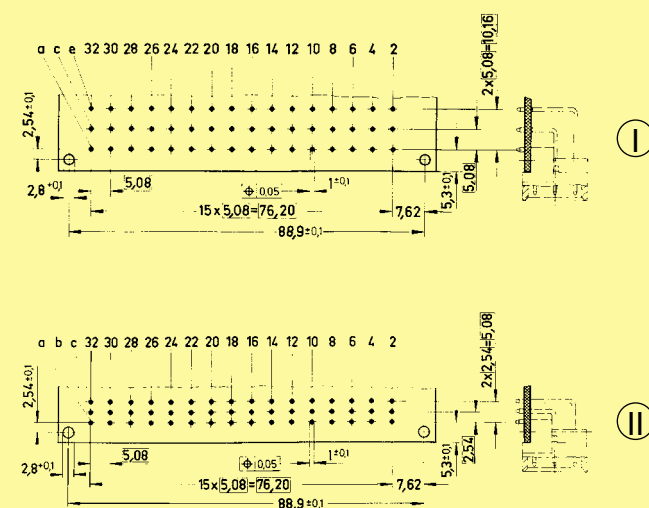

Dimensions in mm

▲ Male connectors with 2 leading contacts [(0.8 mm) pos. a2 and a32]

Other contact arrangements on request

^{b)} Connectors with snap-in clips see chapter 00

^{c)} Connectors with coding see page 02.42