

## Han 4A-SC-M

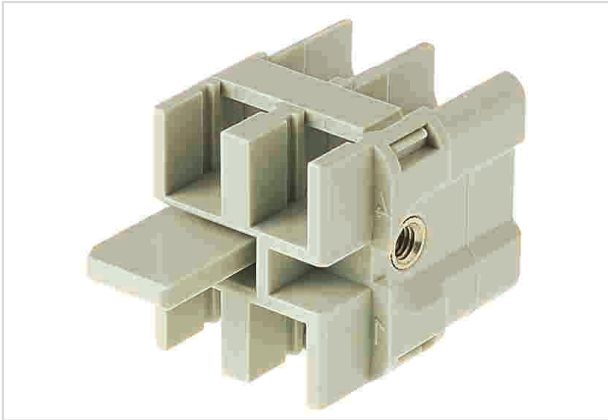


Image is for illustration purposes only. Please refer to product description.

Part number	09 20 004 4701
Specification	Han 4A-SC-M
HARTING eCatalogue	<a href="https://b2b.harting.com/09200044701">https://b2b.harting.com/09200044701</a>

### Identification

Category	Inserts
Series	Han-Brid <sup>®</sup>
Identification	Han <sup>®</sup> 4 A SC
Description of the contact	for FO

### Version

Gender	Male
Size	3 A
Number of contacts	4
Details	Please order contacts separately.

### Technical characteristics

Insulation resistance	$>10^{10} \Omega$
Limiting temperature	-40 ... +85 °C
Mating cycles	$\geq 500$

### Material properties

Material (insert)	Polycarbonate (PC)
Colour (insert)	RAL 7032 (pebble grey)
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption
RoHS exemptions	6(c): Copper alloy containing up to 4 % lead by weight
ELV status	compliant with exemption



Pushing Performance

## Material properties

China RoHS	50
REACH Annex XVII substances	No
REACH ANNEX XIV substances	No
REACH SVHC substances	Yes
REACH SVHC substances	Lead

## Specifications and approvals

UL / CSA	UL 1977 ECBT2.E235076 CSA-C22.2 No. 182.3 ECBT8.E235076
----------	--

## Commercial data

Packaging size	1
Net weight	6.08 g
Country of origin	Germany
European customs tariff number	85389099
eCl@ss	27440205 Contact insert for industrial connectors