

HPP V4 RJ45 Cat5 EI-PFT 8p, metal

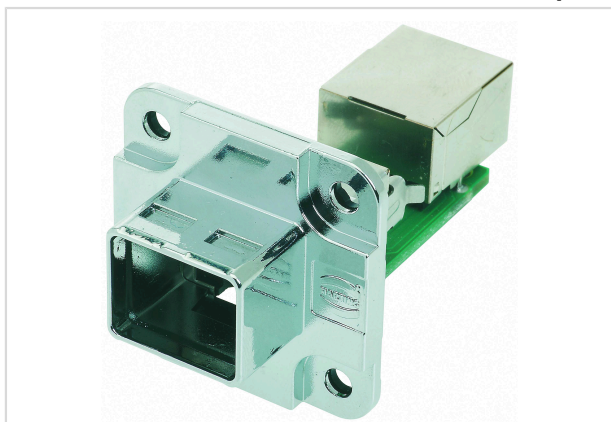


Image is for illustration purposes only. Please refer to product description.

Part number	09 45 295 1130
Specification	HPP V4 RJ45 Cat5 EI-PFT 8p, metal
HARTING eCatalogue	https://b2b.harting.com/09452951130

Identification

Category	Connectors
Series	HARTING PushPull (V4)
Identification	RJ45
Element	Panel feed trough set
Type of hood/housing	Bulkhead mounted housing
Description of hood/housing	EasyInstall

Version

Locking type	PushPull
Shielding	Fully shielded, 360° shielding contact
Number of contacts	5
Pack contents	incl. integrated seal, 2x RJ45-jack and board drillings for M3

Technical characteristics

Limiting temperature	-40 ... +70 °C
Mating cycles	≥750
Degree of protection acc. to IEC 60529	IP65
Transmission characteristics	Cat. 5 Class D up to 100 MHz
Data rate	10 Mbit/s 100 Mbit/s 1 Gbit/s

Material properties

Material (hood/housing)	Zinc die-cast
-------------------------	---------------



Pushing Performance

Material properties

Colour (hood/housing)	Silver
Material flammability class acc. to UL 94	V-0
RoHS	compliant
ELV status	compliant
China RoHS	e
REACH Annex XVII substances	No
REACH ANNEX XIV substances	No
REACH SVHC substances	No

Specifications and approvals

Specifications	IEC 61076-3-106 Variant 4 (V4)
Approvals	DNV GL

Commercial data

Packaging size	1
Net weight	34 g
Country of origin	Romania
European customs tariff number	85366990
eCl@ss	27440101 Rectangular connectors (set)