

HPP V4 RJ45 coupler Cat.6

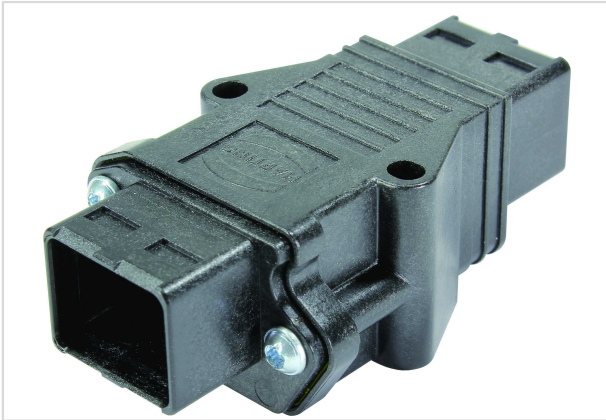


Image is for illustration purposes only. Please refer to product description.

Part number	09 45 345 1560
Specification	HPP V4 RJ45 coupler Cat.6
HARTING eCatalogue	https://b2b.harting.com/09453451560

Identification

Category	Connectors
Series	HARTING PushPull (V4)
Identification	RJ45
Element	Coupler

Version

Locking type	PushPull
Shielding	Fully shielded, 360° shielding contact
Number of contacts	8

Technical characteristics

Limiting temperature	-40 ... +70 °C
Mating cycles	≥750
Degree of protection acc. to IEC 60529	IP65 IP67
Transmission characteristics	Cat. 6 Class E up to 250 MHz
Data rate	10 Mbit/s 100 Mbit/s 1 Gbit/s 10 Gbit/s

Material properties

Material (hood/housing)	Thermoplastic
Colour (hood/housing)	Black
Material flammability class acc. to UL 94	V-0



Pushing Performance

Material properties

RoHS	compliant
ELV status	compliant
China RoHS	e
REACH Annex XVII substances	No
REACH ANNEX XIV substances	No
REACH SVHC substances	No

Specifications and approvals

Specifications	IEC 61076-3-106 Variant 4 (V4)
	EN 45545-2 R22: HL1, HL2, HL3
	EN 45545-2 R23: HL1, HL2, HL3
Approvals	DNV GL

Commercial data

Packaging size	1
Net weight	37.5 g
Country of origin	Romania
European customs tariff number	85366990
eCl@ss	27440190 Industry connector (unspecified)