

RJ45 RJ45 2-port jack Cat.5 THT angled

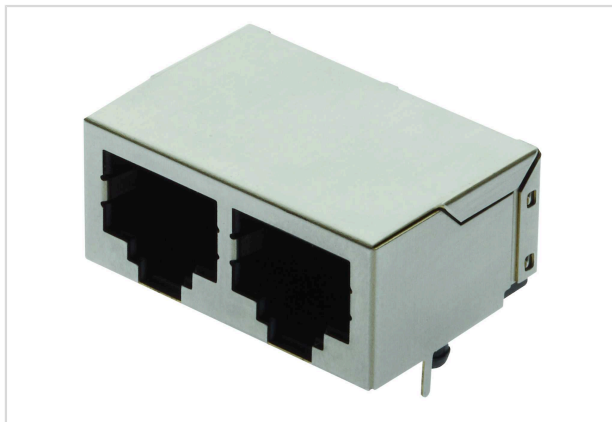


Image is for illustration purposes only. Please refer to product description.

| | |
|--------------------|---|
| Part number | 09 45 551 1122 |
| Specification | RJ45 RJ45 2-port jack Cat.5 THT angled |
| HARTING eCatalogue | https://b2b.harting.com/09455511122 |

Identification

| | |
|---------------|---------------------------|
| Category | Connectors |
| Series | HARTING RJ Industrial® |
| Element | Female |
| Specification | RJ45 Angled 2 ports |

Version

| | |
|--------------------|--|
| Termination method | Wave soldering termination |
| Shielding | Fully shielded, 360° shielding contact |
| Number of contacts | 8 |

Technical characteristics

| | |
|--|----------------|
| Rated current | 1.5 A |
| Rated voltage | 125 V |
| Limiting temperature | -40 ... +85 °C |
| Mating cycles | ≥750 |
| Degree of protection acc. to IEC 60529 | IP20 |

Material properties

| | |
|-----------------------------|-----------|
| RoHS | compliant |
| ELV status | compliant |
| China RoHS | e |
| REACH Annex XVII substances | No |



Pushing Performance

Material properties

| | |
|----------------------------|----|
| REACH ANNEX XIV substances | No |
| REACH SVHC substances | No |

Specifications and approvals

| | |
|-----------|--|
| Approvals | DNV GL |
| UL / CSA | UL 1977 DUXR2.E254191 CSA-C22.2 No. 182.4, No. 233-09 DUXR8.E254191 |

Commercial data

| | |
|--------------------------------|------------------------|
| Packaging size | 110 |
| Net weight | 11.44 g |
| Country of origin | Taiwan |
| European customs tariff number | 85366990 |
| eCl@ss | 27440402 PCB connector |