Number of contacts

96, 64, 32

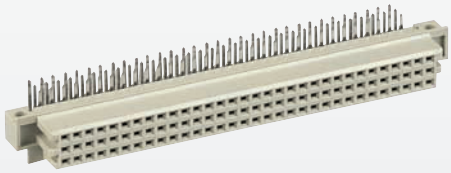

Female connectors

Identification	Number of contacts	Contact arrangement	Part No.	Performance levels according to DIN 41 612. Explanation chapter 00		
				3	2	1
Female connector with angled solder pins	96		09 79 296 7801	09 79 296 6801	09 79 296 2801	
	64		09 79 264 7801	09 79 264 6801	09 79 264 2801	
	32		09 79 232 7801	09 79 232 6801	09 79 232 2801	

Dimensions

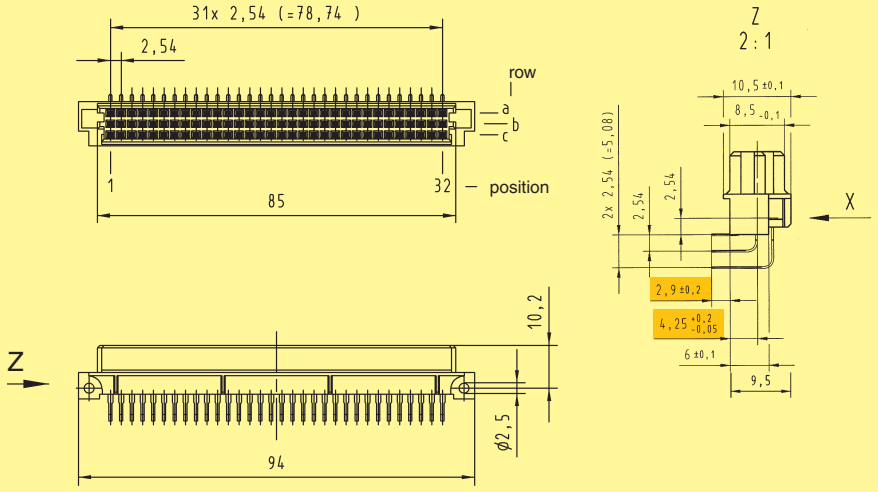

Board drillings

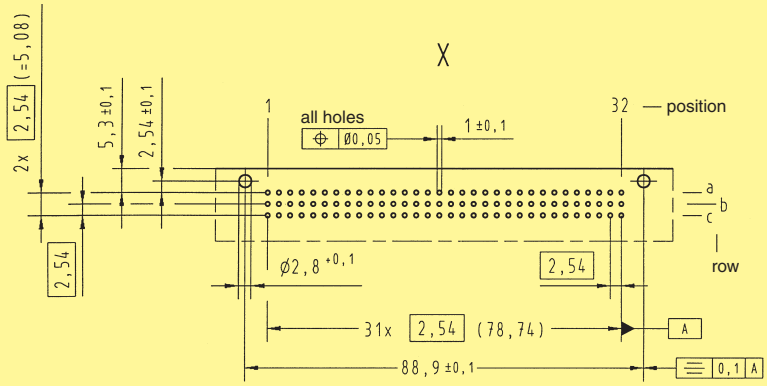

Dimensions in mm

Other contact arrangements on request

= deviating dimensions from standard female connectors (see page 01.35)