

1-1393219-2 ✓ ACTIVE

SCHRACK | SCHRACK Miniature PCB Relay PE bistable


TE Internal #: 1-1393219-2

General Purpose Power Relay, Monostable, .21 W Coil, 6170 ohm  
Coil Resistance, SCHRACK Miniature PCB Relay PE bistable, Power  
Relays

[View on TE.com >](#)



Relays & Contactors > Relays > Power Relays

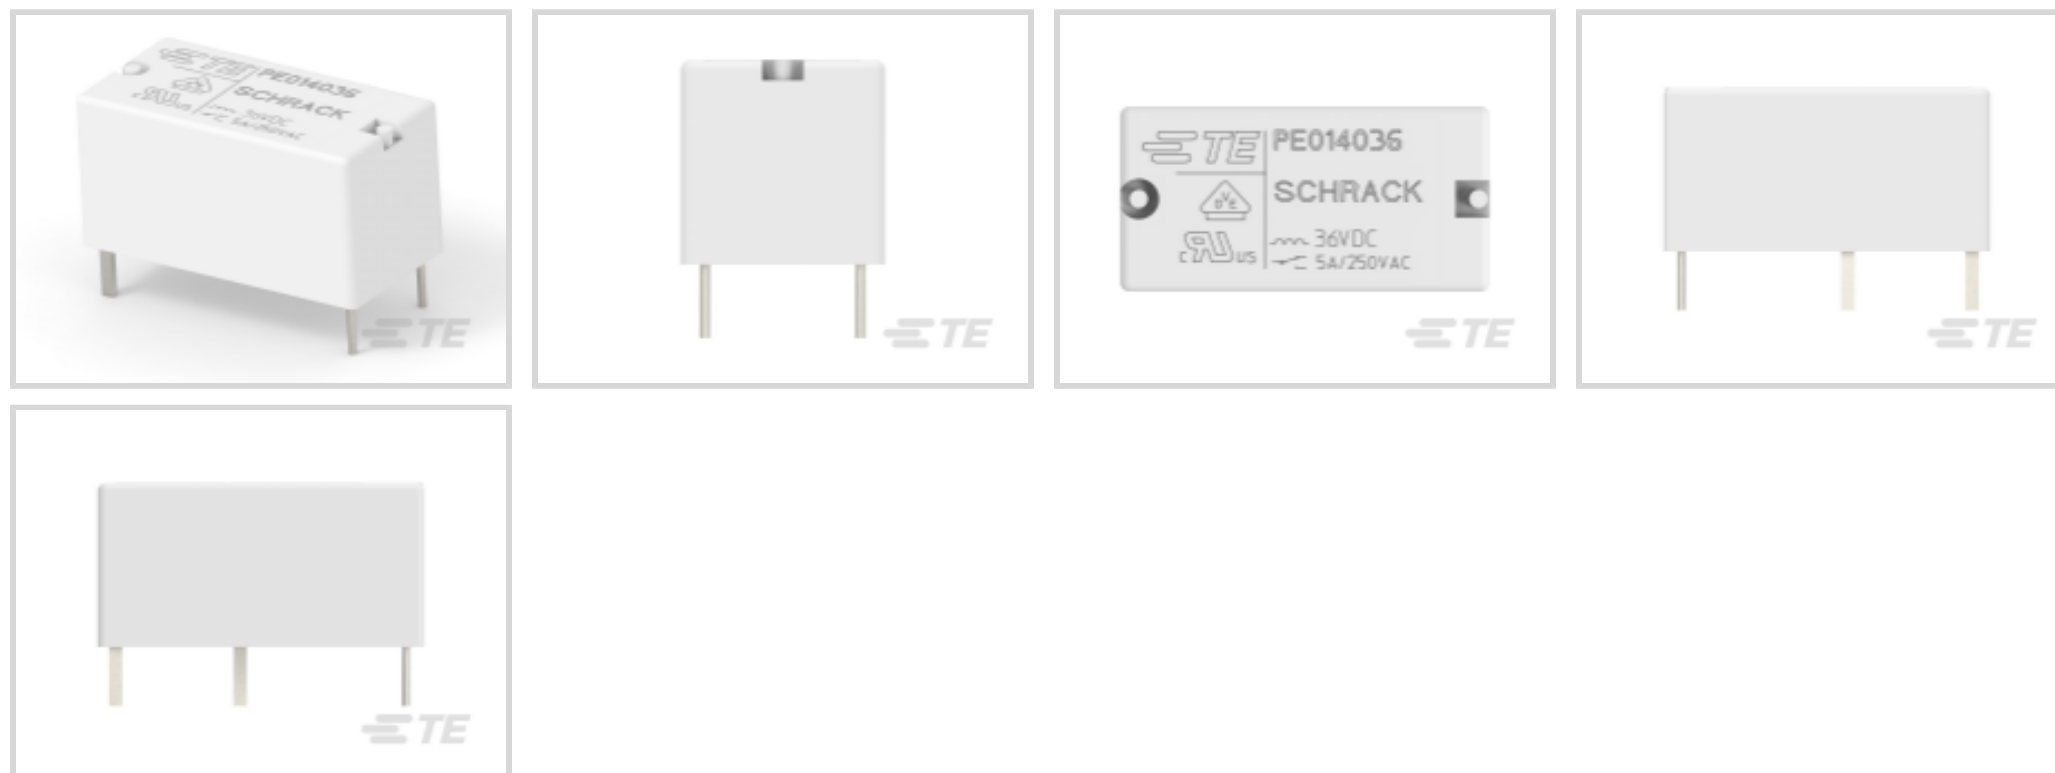

Relay Type: **General Purpose Power Relay**

Coil Magnetic System: **Monostable**

Coil Power Rating DC: **.21 W**

Coil Resistance: **6170  $\Omega$**

Coil Voltage Rating: **36 VDC**

## Features

### Product Type Features

Relay Type	General Purpose Power Relay
------------	-----------------------------

### Configuration Features

Contact Arrangement	1 Form C SPDT-CO
Contact Number of Poles	1

### Electrical Characteristics

Insulation Initial Dielectric Between Open Contacts	1000 Vrms
Contact Limiting Making Current	5 A
Contact Limiting Short-Time Current	5 A
Contact Limiting Continuous Current	5 A
Insulation Initial Dielectric Between Contacts & Coil	4000 Vrms
Insulation Initial Resistance	10000000 M $\Omega$
Contact Limiting Breaking Current	5 A
Coil Power Rating DC	.21 W
Coil Resistance	6170 $\Omega$



Coil Voltage Rating	36 VDC
---------------------	--------

Contact Current Rating	5 A
------------------------	-----

Contact Switching Voltage (Max)	400 VAC
---------------------------------	---------

Contact Voltage Rating	250 VAC
------------------------	---------

### Body Features

Product Weight	5 g[.1764 oz]
----------------	---------------

### Contact Features

Contact Material	AgNi90/10
------------------	-----------

### Dimensions

Insulation Clearance Between Contact & Coil	3.2 mm[.126 in]
---	-----------------

Insulation Creepage Between Contact & Coil	4 mm[.157 in]
--	---------------

Product Width	10 mm[.394 in]
---------------	----------------

Product Length	20 mm[.787 in]
----------------	----------------

Product Height	10 mm[.394 in]
----------------	----------------

### Usage Conditions

Environmental Category of Protection	RTII
--------------------------------------	------

Environmental Ambient Temperature (Max)	85 °C[185 °F]
---	---------------

### Operation/Application

Actuating System	DC
------------------	----

Coil Magnetic System	Monostable
----------------------	------------

### Packaging Features

Packaging Method	Carton, Tube
------------------	--------------

### Other

Length Class (Mechanical)	16 – 20 mm
---------------------------	------------

Environmental Ambient Temperature Class	70 – 85 °C
---	------------

Height Class (Mechanical)	9 – 10 mm
---------------------------	-----------

Coil Power Rating Class	.2 – .3 W
-------------------------	-----------

Width Class (Mechanical)	8 – 10 mm
--------------------------	-----------

Contact Current Class	16 A
-----------------------	------

### Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)



EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 260°C


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

### Compatible Parts



### Also in the Series | SCHRACK Miniature PCB Relay PE bistable

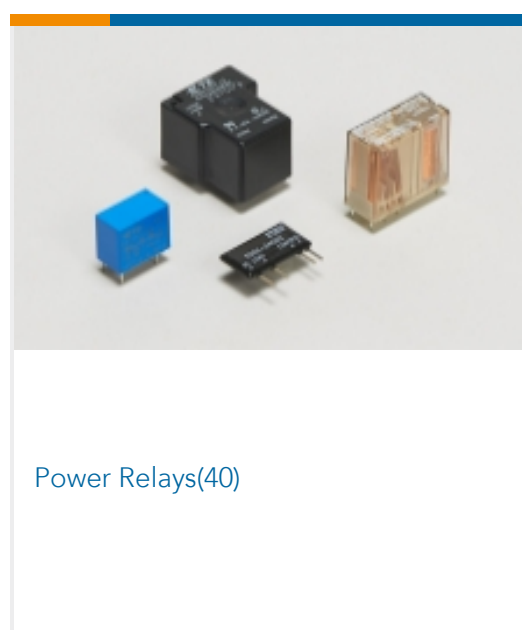

## Customers Also Bought



## Documents

### CAD Files

#### Customer View Model

[ENG\\_CVM\\_CVM\\_1-1393219-2\\_C2.3d\\_igs.zip](#)

English

#### Customer View Model

[ENG\\_CVM\\_CVM\\_1-1393219-2\\_C2.3d\\_stp.zip](#)

English

#### Customer View Model

[ENG\\_CVM\\_CVM\\_1-1393219-2\\_C2.2d\\_dxf.zip](#)

English

### 3D PDF

3D

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

### Datasheets & Catalog Pages

#### Miniature PCB Relay PE

English

### Product Specifications

#### Definitions General Purpose Relays

English

### Agency Approvals

#### VDE Certificate

English

1-1393219-2

General Purpose Power Relay, Monostable, .21 W Coil, 6170 ohm Coil Resistance,  
SCHRACK Miniature PCB Relay PE bistable, Power Relays

