


032-0155-0001 Product Details

[Share](#) [Print](#) [Email](#)

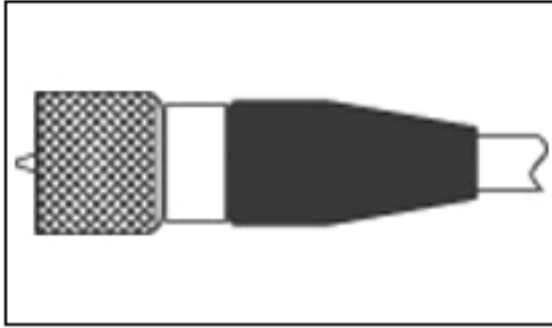

032-0155-0001
(1-1532153-9)

TE Internal Number: 1-1532153-9

Active

SMB RF Connectors

[Not EU RoHS or ELV Compliant](#)

Product Highlights:

- Connector - RF
- Plug
- Miniature
- Applies To Coaxial Cable
- Coupler Style = Threaded

[View all Features](#)

Quick Links

- ▶ [Check Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)

[Add to My Part List](#) [Request Sample](#) [Find Similar Products](#) [Buy Product](#)

Documentation & Additional Information

Product Drawings:

- [STRAIGHT PLUG HEX NUT,HEX CABLE CLAMP NUT S-50 SERIES](#) (PDF, English)

Catalog Pages/Data Sheets:

- None Available

Product Specifications:

- None Available

Application Specifications:

- None Available

Instruction Sheets:

- None Available

CAD Files:

- None Available

Related Products:

- [Tooling](#)

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- [Product Type](#) = Connector - RF
- [Gender](#) = Plug
- Connector Series = Miniature
- [Body Style](#) = Straight
- [Grade](#) = Commercial
- Safety Wire Holes = Without
- Thread Size = 4.83 [.190]-32
- Body Material = Brass
- Coupling Nut Style = 4.75 [.187] Hex Cable Clamp Nut
- Dielectric Material = Fluoropolymer

Mechanical Attachment:

- [Panel Mount Retention](#) = Without

Electrical Characteristics:

- [Connector Impedance \(Ω\)](#) = 50
- Solderless = No

Termination Features:

- [Coaxial Cable Termination Type](#) = Solder

Body Features:

- Coupler Style = Threaded
- [Pin Protection](#) = With
- Solder Lug = Without
- [Body Plating](#) = Silver
- Cable Jacket Diameter (mm [in]) = 2.24 [0.088]

Contact Features:

- [Center Contact Plating](#) = Gold per MIL-G-45204, Type II, Grade C, Class 1
- Preloaded = Yes

Configuration Features:

- Environmental Protection = Without

Industry Standards:

- [RoHS/ELV Compliance](#) = Not ELV/RoHS compliant
- [Lead Free Solder Processes](#) = Not suitable for lead free processing

Conditions for Usage:

- [Applies To](#) = Coaxial Cable

Other:

- Brand = Microdot
- Comment = Hole in ferrule permits soldering to clamp ring and shield for increased cable pullout strength.

Corporate Information

- [Who We Are](#)
- [Investors](#)
- [News Room](#)
- [Supplier Portal](#)
- [Careers](#)

Quick Links

- [Check Distributor Inventory](#)
- [Cross Reference](#)
- [Find Documents & Drawings](#)
- [Product Compliance Support Center](#)
- [Site Map](#)

Customer Support

- [Email or Chat With Us](#)
- [Find a Phone Number](#)
- [Search Knowledge Base](#)
- [Manage your Account](#)

Keep Me Informed

Receive TE News, Events & Technology Updates

Enter your email address

