

1-1718645-3 ✓ ACTIVE

## MCON Interconnection System

TE Internal #: 1-1718645-3

Housing for Female Terminals, Wire-to-Board / Wire-to-Wire / Wire-to-Device, 4 Position, .157 in [4 mm] Centerline, MCON Interconnection System

[View on TE.com >](#)



Connectors > Automotive Connectors > Automotive Housings



Connector System: **Wire-to-Board, Wire-to-Device, Wire-to-Wire**

Number of Positions: **4**

Connector & Housing Type: **Housing for Female Terminals**

Centerline (Pitch): **4 mm [ .157 in ]**

Sealable: **Yes**

### Features

#### Product Type Features

Mixed & Hybrid Connector	No
Connector Shape	Rectangular
Connector System	Wire-to-Board, Wire-to-Device, Wire-to-Wire
Connector & Housing Type	Housing for Female Terminals
Sealable	Yes
Connector & Contact Terminates To	Wire & Cable
Primary Locking Feature	On the Terminal

#### Configuration Features

Number of Positions	4
Number of Rows	1

#### Electrical Characteristics

Nominal Voltage Architecture	12 V
------------------------------	------

#### Body Features



Cable Exit Angle	180°
Primary Product Color	Black
Connector & Keying Code	A

#### Contact Features

Contact Size	1.2mm
Contact Type	Receptacle
Mating Tab Width	1.2 mm[.047 in]
Contact Current Rating (Max)	25 A

#### Mechanical Attachment

Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)

#### Housing Features

Housing Material	PA GF
Centerline (Pitch)	4 mm[.157 in]

#### Usage Conditions

Operating Temperature (Max)	70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C, 110 °C, 120 °C, 125 °C, 130 °C[158 °F][167 °F][176 °F][185 °F][194 °F][212 °F][221 °F][230 °F][248 °F][257 °F][266 °F]
Operating Temperature Range	-40 – 130 °C[-40 – 266 °F]

#### Operation/Application

Circuit Application	Power
---------------------	-------

#### Other

Connector Position Assurance Capable	Yes
--------------------------------------	-----

#### Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235)



Candidate List Declared Against: JUNE 2023 (235)

Does not contain REACH SVHC

Halogen Content

BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.

Solder Process Capability

Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


## Compatible Parts



## Also in the Series | MCON Interconnection System



Automotive Connector Caps & Covers (21)

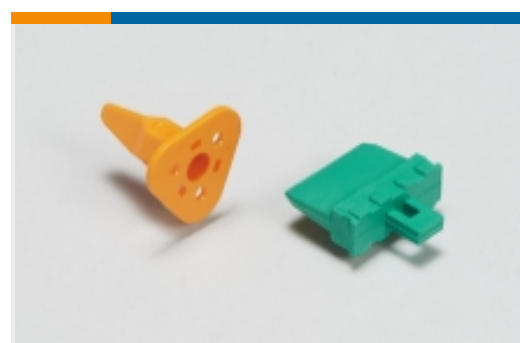


Automotive Connector Locks & Position Assurance(11)




Automotive Housings(288)




Automotive Terminals(104)

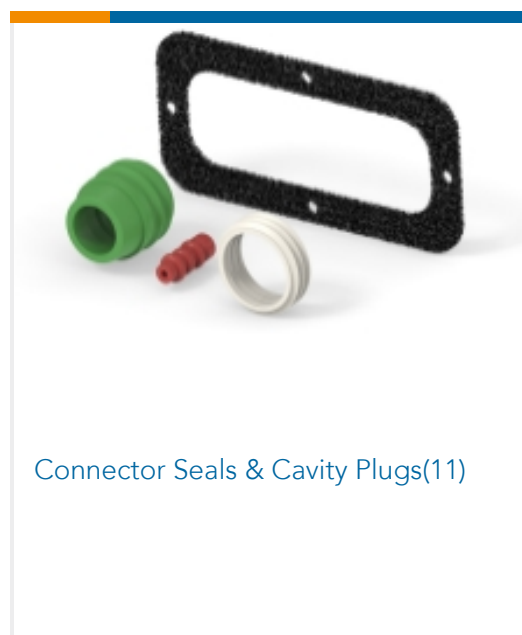

Connector Seals &amp; Cavity Plugs(11)

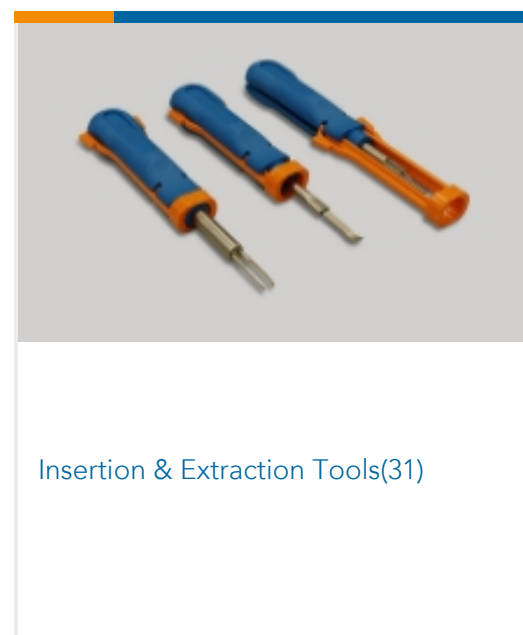

Insertion &amp; Extraction Tools(31)

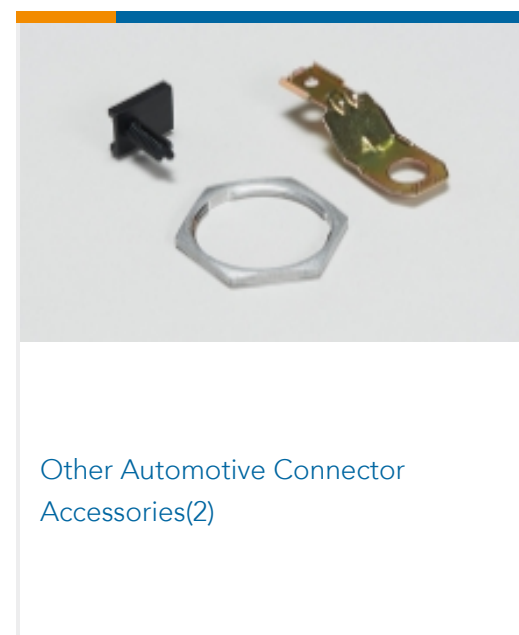

Other Automotive Connector Accessories(2)



PCB Headers &amp; Receptacles(2)

## Customers Also Bought

TE Part #1488973-1  
MQS, CONNECTOR HOUSINGTE Part #1719043-1  
SINGLE WIRE SEAL, GREENTE Part #63721-1  
RING 24-20 AWG TPBRTE Part #1326031-2  
1.5/2.8 CONNECTOR SYSTEM, RECPT AND TABTE Part #2098067-7  
Plug Assembly, Hybrid, BCM, CL, G KeyTE Part #2098067-4  
Plug Assembly, Hybrid, BCM, U2, D KeyTE Part #2098067-6  
Plug Assembly, Hybrid, BCM, B2, F KeyTE Part #184139-1  
WIRE SEAL, RUBBER, SENSOR, BLUE

## Documents

### CAD Files

#### Customer View Model

[ENG\\_CVM\\_CVM\\_1-1718645-3\\_F.3d\\_stp.zip](#)

English

### 3D PDF

3D

#### Customer View Model

[ENG\\_CVM\\_CVM\\_1-1718645-3\\_F.2d\\_dxf.zip](#)

English

#### Customer View Model

[ENG\\_CVM\\_CVM\\_1-1718645-3\\_F.3d\\_igs.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

### Product Specifications

#### Product Specification

English

1-1718645-3

Housing for Female Terminals, Wire-to-Board / Wire-to-Wire / Wire-to-Device, 4  
Position, .157 in [4 mm] Centerline, MCON Interconnection System

