

1-1734741-0 ✓ ACTIVE



## FPC

TE Internal #: 1-1734741-0

FPC Connectors, Flex-to-Board, 10 Position, .02 in [.5 mm]

Centerline, Zero Insertion Force (ZIF), Vertical, Surface Mount

[View on TE.com >](#)

Connectors > PCB Connectors > Wire-to-Board Connectors > FFC, FPC & Ribbon Connectors > FPC Connectors > 0.5mm FPC Connectors



Connector System: **Flex-to-Board**

Number of Positions: **10**

Centerline (Pitch): **.5 mm [.02 in ]**

Insertion Force Type: **Zero Insertion Force (ZIF)**

PCB Mount Orientation: **Vertical**

[All 0.5mm FPC Connectors \(135\)](#)

## Features

### Product Type Features

|                                   |   |
|-----------------------------------|---|
| PCB Connector Assembly Type       | PCB Mount Receptacle                                  |
| Connector Product Type            | Connector Assembly                                    |
| Connector System                  | Flex-to-Board   |
| Insertion Force Type              | Zero Insertion Force (ZIF)                            |
| FPC Actuator Type                 | Stuffer (Plunger Style)                               |
| Connector & Contact Terminates To | Flexible Printed Circuit (FPC), Printed Circuit Board |

### Configuration Features

|                                   |          |
|-----------------------------------|----------|
| Compatible With Wire & Cable Type | FFC, FPC |
| Number of Rows                    | 1        |
| Number of Positions               | 10       |
| PCB Mount Orientation             | Vertical |

### Electrical Characteristics

|                   |        |
|-------------------|--------|
| Operating Voltage | 50 VAC |
|-------------------|--------|

### Body Features

|                       |       |
|-----------------------|-------|
| Primary Product Color | Black |
|-----------------------|-------|

### Contact Features

|  |  |
|--|--|
|  |  |
|--|--|



|  |                           |
|--|---------------------------|
|  | 120 $\mu$ m               |
| Contact Layout                                 | Staggered Type B          |
| Contact Type                                   | Socket                    |
| Contact Mating Area Plating Material Thickness | .025 $\mu$ m[120 $\mu$ m] |
| Contact Shape & Form                           | Single Beam               |
| PCB Contact Termination Area Plating Material  | Gold                      |
| Contact Base Material                          | Phosphor Bronze           |
| Contact Mating Location                        | Bottom                    |
| Contact Mating Area Plating Material           | Gold                      |
| Contact Current Rating (Max)                   | .5 A                      |

### Termination Features

|   |               |
|---|---------------|
| Termination Method to Printed Circuit Board | Surface Mount |
|---|---------------|

### Mechanical Attachment

|                         |             |
|-------------------------|-------------|
| Mating Alignment        | With        |
| PCB Mount Alignment     | Without     |
| PCB Mount Retention     | With        |
| Connector Mounting Type | Board Mount |

### Housing Features

|                    |               |
|--------------------|---------------|
| Housing Material   | PA 9T GF      |
| Centerline (Pitch) | .5 mm[.02 in] |

### Dimensions

|                              |                  |
|------------------------------|------------------|
| Connector Length             | 10.7 mm[.421 in] |
| Connector Height             | 4.15 mm[.163 in] |
| Connector Width              | 3.8 mm[.15 in]   |
| Accepts Flex Cable Thickness | .3 mm[.012 in]   |

### Usage Conditions

|                             |                          |
|-----------------------------|--------------------------|
| Operating Temperature Range | -20 – 85 °C[-4 – 185 °F] |
|-----------------------------|--------------------------|

### Operation/Application

|                     |        |
|---------------------|--------|
| Circuit Application | Signal |
|---------------------|--------|

### Identification Marking

|                                |         |
|--------------------------------|---------|
| Circuit Identification Feature | Without |
|--------------------------------|---------|

### Packaging Features

|                    |      |
|--------------------|------|
| Packaging Quantity | 1000 |
| Packaging Method   | Tape |

## Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

|   |   |
|---|---|
| EU RoHS Directive 2011/65/EU                  | Compliant   |
| EU ELV Directive 2000/53/EC                   | Compliant   |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold   |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JUNE 2023 (235)<br>Candidate List Declared Against: JUNE 2022 (224)<br>Does not contain REACH SVHC |
| Halogen Content                               | Not Low Halogen - contains Br or Cl > 900 ppm.  |
| Solder Process Capability                     | Reflow solder capable to 260°C  |

### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

## Compatible Parts




## Customers Also Bought



TE Part #640456-6  
06P MTA100 HDR ASSY F/L SQ STR




TE Part #2227595-1  
1X1 VERT ASSY, MINI SAS HD  
INTERNAL

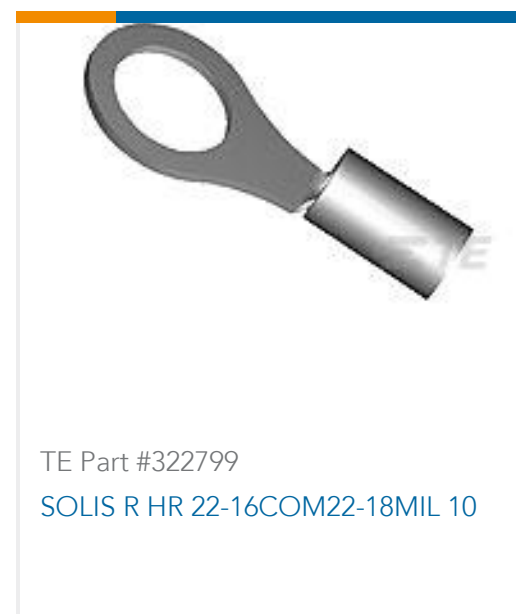

TE Part #322799  
SOLIS R HR 22-16COM22-18MIL 10



TE Part #5-146280-1  
01 MODII HDR SRST B/A LF

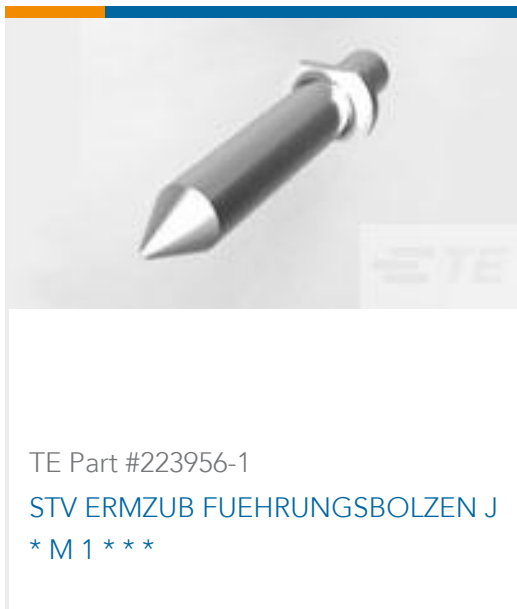

TE Part #223956-1  
STV ERMZUB FUEHRUNGSBOLZEN J  
\* M 1 \*\*\*



TE Part #5650897-5  
ASSY,RECEPT,EURO,TYPE R,L-FREE,  
A&C,64/96



TE Part #1-2373376-2  
12P,2MM,SHRD HDR,DRVT,SMD,0.1  
AU,TB



TE Part #2355045-3  
3P,2MM,BRK HDR,SRVT,2.8,0.1AU,TB



TE Part #1775838-2  
mSATA/mini PCI-E 5.6H Type I G/F

## Documents

### CAD Files

#### Customer View Model

[ENG\\_CVM\\_CVM\\_1-1734741-0\\_O.2d\\_dxf.zip](#)

English

### 3D PDF

3D

#### Customer View Model

[ENG\\_CVM\\_CVM\\_1-1734741-0\\_O.3d\\_igs.zip](#)

English

#### Customer View Model

[ENG\\_CVM\\_CVM\\_1-1734741-0\\_O.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

### Datasheets & Catalog Pages

[1-1773959-7-FPC-Connectors-CN](#)

### Product Specifications

[Product Specification](#)

1-1734741-0

FPC Connectors, Flex-to-Board, 10 Position, .02 in [.5 mm] Centerline, Zero Insertion Force (ZIF), Vertical, Surface Mount



English