


CONNECTOR HOUSINGS

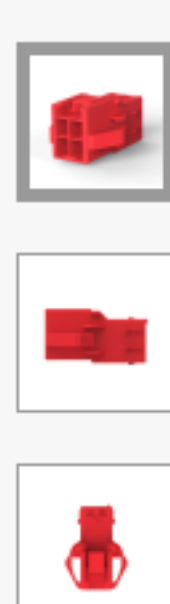

TE CONNECTIVITY
PDL 4P CAP 3.96 D/R P/M(GWT) R
 AMP | Power Double Lock

1-368589-2
 TE Internal Number: 1-368589-2

Always EU RoHS/ELV Compliant
 Connector System **Wire-to-Panel, Wire-to-Wire**

Centerline **3.96mm[.156in]**
 Row-to-Row Spacing(in) **.181, 4.6**

Number of Positions **4**

Number of Rows **2**
[> See All Features](#)

✓ Active

[PRODUCT DRAWING](#)
 English

[3D MODEL](#)

[> See All Documentation](#)

North America ▼

Contact us to request pricing, availability and customization options.

[REQUEST ADDITIONAL INFORMATION](#) >

SAVE TO LIST	
CHECK FOR TOOLING	
FIND SIMILAR PRODUCTS	

DOCUMENTATION FEATURES

Please review product documents or [contact us](#) for the latest agency approval information. Please Note: Use the Product Drawing for all design activity.

Product Type Features	Connector System	Wire-to-Panel, Wire-to-Wire
	Row-to-Row Spacing(in)	.181, 4.6
	Connector Style	Receptacle
	Sealed	No
	Wire/Cable Type	Discrete Wire
	Wire Type	Stranded
	Glow Wire Rating	Glow Wire
	Product Type	Connector
	Connector Type	Housing
	Applies To	Panel, Wire/Cable

Configuration Features	Number of Positions	4
	Number of Rows	2

Electrical Characteristics	Operating Voltage(VAC)	300
----------------------------	------------------------	------------

Contact Features	Contact Type	Tab
	Contact Transmits (Typical)	Power, Signal (Data)
	Contact Layout	Matrix

Mechanical Attachment	Panel Mount Retention Type	Latches
	Panel Mount Retention	With

Housing Features	Centerline	3.96mm[.156in]
	Housing Material	PA 66
	Housing Color	Red

Dimensions	Panel Thickness	.031 – .078 in, .8 – 2 mm
------------	-----------------	----------------------------------

Usage Conditions	Operating Temperature Range	65°C[149°F]
------------------	-----------------------------	--------------------

Operation/Application	For Use With	Contacts: 177916 or 177917, Double Lock Plate 368590-1, Plug (GWT): 368575
-----------------------	--------------	---

Industry Standards	Agency/Standard	CNR, USR
	UL File Number	C22.2 No. 182.3, UL 1977
	UL Flammability Rating	UL 94V-0

Packaging Features	Packaging Quantity	150
	Packaging Method	Bag

Product Compliance
[Statement of Compliance](#)
 PDF
[VIEW ALL PRODUCT COMPLIANCE](#)

COMPATIBLE

No compatible products found for 1-368589-2