

## RAMO 30 F, USB, round collar, frontring stainless steel, USB 3.0 type A with cable 55 cm




### fields of application

- > Measurement-control-regulation
- > Electrical engineering
- > Mechanical and system engineering
- > Vehicle construction
- > Chemical industry
- > Industrial robots
- > Home technology



### description

Cable feed-through for front panels. Front side USB 3.0 or RJ45, rear side with corresponding sockets in the housing or 55 cm cable and socket

### technical data

#### > general

illuminated	No
Collar color	black
Front ring color	stainless steel
Collar shape	round
Operating temperature, min.	-25 °C
Operating temperature, max.	70 °C
Storage temperature, min.	-40 °C
Storage temperature, max.	90 °C
Packaging	Box
Packaging unit	2 pcs.
standard delivery time	3 weeks
Environment resistance	IEC 60068-2-14 IEC 60068-2-30 IEC 60068-2-78
Operating life	1,500 Cycles
Degree of protection, front side, according to DIN EN 60529	IP65 with sealing cap
UL Enclosure Type Rating front side	type 4X
RoHS compliant	Yes
REACH compliant	Yes


#### direct links

- > [RAFI eCatalog](#)

shock resistance	05 side 06 frontal
MOQ order	2
<b>&gt; mounting diameters</b>	
Mounting hole	30.3 mm
Mounting depth	32.82 mm
Installation height	5.25 mm
Grid, min.	35 mm
Outside dimension, length	34.5 mm
Outside dimension, width	34.5 mm
Outside dimension, height	38.07 mm
Collar dimension	34.5 mm
<b>&gt; mechanical data</b>	
Fixing	Threaded ring
Threaded ring torque, max.	1.2 Nm
Front side terminal	USB 3.0 type A
Terminal on the rear	USB 3.0 type A with cable 55 cm

**drawings**

**Dimensioned drawing**

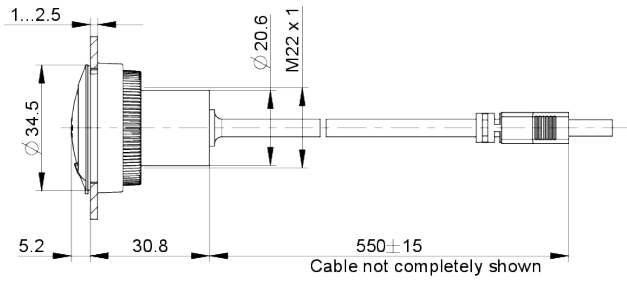

**Mounting hole drawing**

