

TILTED DIAMOND⁺3 signal lamp, lamp red / yellow / green, 24 Volt, bezel transparent, M12 4-pin A-coded


NEW


fields of application

- > Measurement-control-regulation
- > Electrical engineering
- > Mechanical and system engineering
- > Signalling systems
- > Vehicle construction
- > Industrial robots
- > Model construction

description

technical data

> general

illuminated	Yes
Bezel color	transparent
Luminous element color	red / yellow / green
Bezel shape	convex
Collar shape	round
Operating temperature, min.	-30 °C
Operating temperature, max.	60 °C
Storage temperature, min.	-40 °C
Storage temperature, max.	85 °C
Luminous elements	LED
Packaging	Box
Packaging unit	1 pcs.
Degree of protection, front side, according to DIN EN 60529	IP66 IP67
SAP MOQ order	1

direct links

- > [RAFI eCatalog](#)

> mounting diameters

Mounting depth	14.5 mm
Installation height	70.1 mm
Outside dimension, width	56.8 mm
Collar dimension	56.8 mm

> mechanical data

Fixing	Screw
Terminal on the rear	M12 4-pin A-coded
PIN 1	LED red
PIN 2	LED green


PIN 3	GND
PIN 4	LED yellow

> electrical data


Rated operating voltage	24 V
Operating voltage of the luminous element, min.	20 V
Operating voltage of the luminous element, max.	28 V

drawings

System drawing



Mounting hole drawing

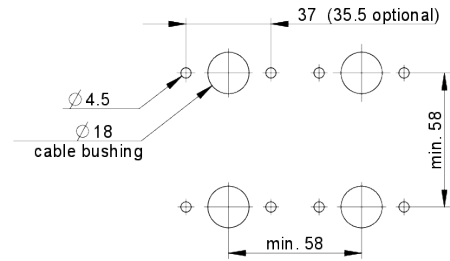

Schematic diagram

