


| DATE   | SYM | REVISION RECORD | AUTH. | DR. | CK. |
|--------|-----|-----------------|-------|-----|-----|
| 4/8/03 | A   | ISSUED          | OI    | NT  | OI  |
|        |     |                 |       |     |     |
|        |     |                 |       |     |     |
|        |     |                 |       |     |     |

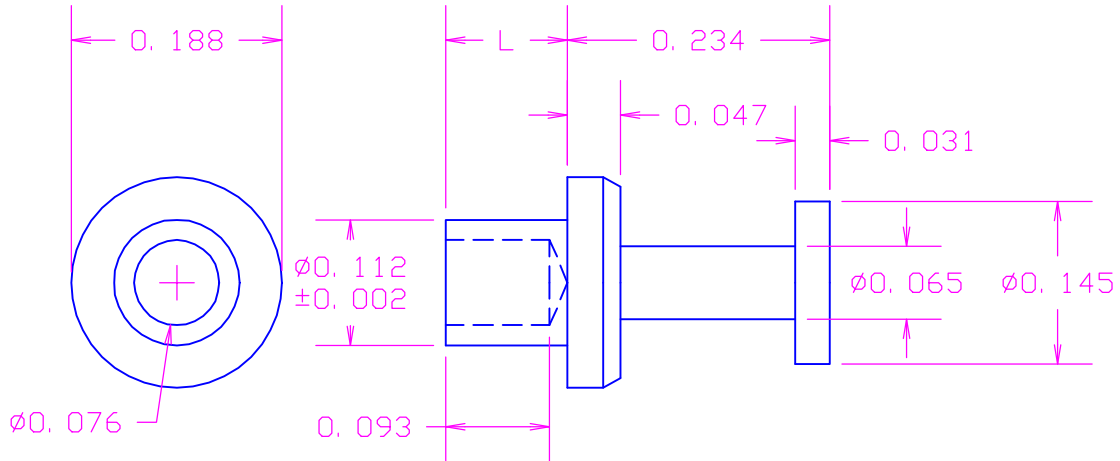

RECOMMENDED MOUNTING HOLE .116" DIA. (#32 DRILL)

MATERIAL: BRASS PER ASTM B16,


ALLOY C 36000, 1/2 HARD

FINISH: .0003" MIN. SILVER PER QQ-S-365

TYPE II, GRADE A WITH NON-CHROMATE  
PRESERVATIVE

| PART NUMBER: | L:   | BOARD THICKNESS: |
|--------------|------|------------------|
| 10-103-1-01  | .078 | 1/32             |
| 10-103-2-01  | .109 | 1/16             |
| 10-103-3-01  | .141 | 3/32             |
| 10-103-4-01  | .172 | 1/8              |
| 10-103-6-01  | .234 | 3/16             |
| 10-103-8-01  | .297 | 1/4              |

ACTUAL SIZE



|                          |                                 |                               |                                            |
|--------------------------|---------------------------------|-------------------------------|--------------------------------------------|
| TOLERANCES               | CONCORD ELECTRONICS CORPORATION |                               |                                            |
| DECIMAL<br>$\pm .005$    | P/N                             | SCALE                         | 30 GREAT JONES ST.<br>NEW YORK N. Y. 10012 |
| FRACTIONAL<br>$\pm 1/64$ | TITLE<br>TERMINAL               |                               |                                            |
| $\pm 5^\circ$            | DATE<br>7/8/03                  | DRAWING NUMBER<br>10-103-X-01 |                                            |