

注記
NOTE

- △ 全極数が偶数の場合のみ適用。
TO BE APPLIED ONLY WHEN ALL CKTS. ARE EVEN.
- 2 ウエハーの反りは、長さ 25.4 に対して 0.2 最大。
CAMBER MUST BE 0.24 MAX. PER 25.4.

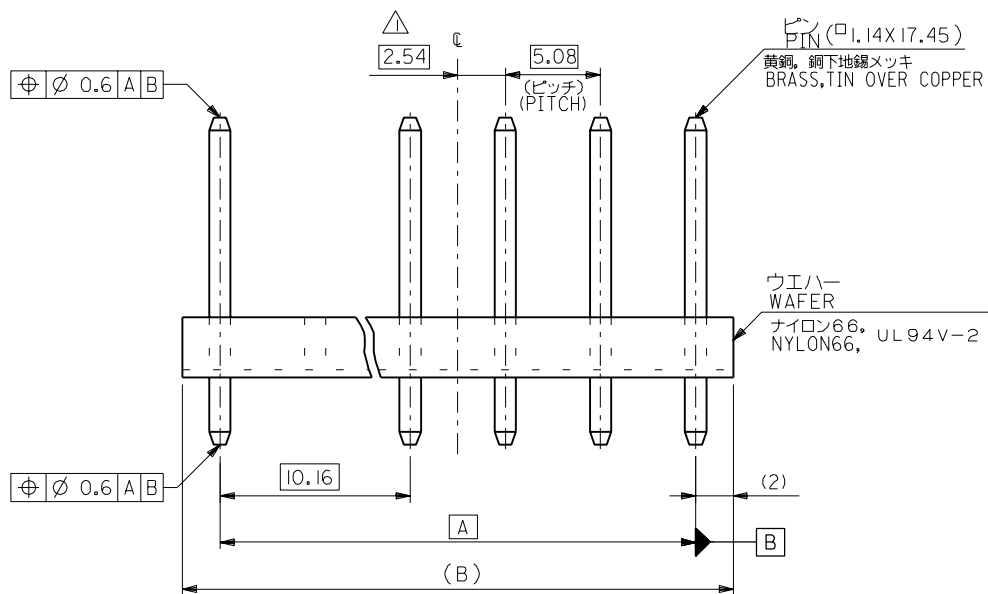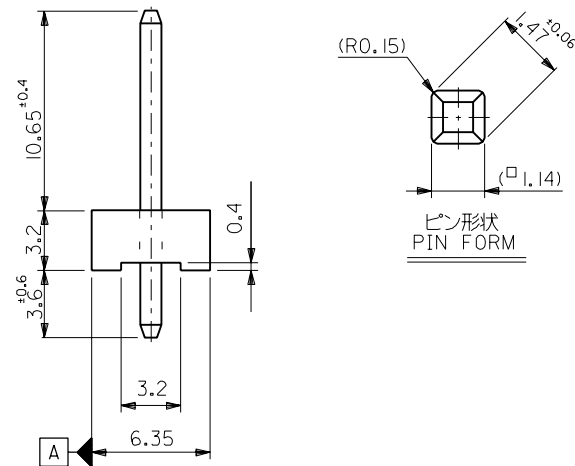

44.64	40.64	10-63-1083	5283-08A	8
39.56	35.56	↑ -1073	↑ -07A	7
34.48	30.48	↑ -1063	↑ -06A	6
29.4	25.4	↑ -1053	↑ -05A	5
24.32	20.32	↑ -1043	↑ -04A	4
19.24	15.24	↑ -1033	↑ -03A	3
14.16	10.16	10-63-1023	5283-02A	2
B	A	EDP NO.	ENG. NO.	極数 CKT.

角度	ANGLE	±3°
30 以上	OVER	±0.3
10 以上 30 未満	OVER UNDER	±0.25
10 未満	UNDER	±0.2
一般公差		
GENERAL TOLERANCES		

記号	変更内容	DR.	日付
LTR	REVISION RECORD	CHK	DATE

材料	図中参照
MATERIAL	SEE DRAWING
仕上げ	—H—
FINISH	
適用電線範囲	—H—
WIRE RANGE	
被覆外径	—H—
INS. RANGE	
DRAWN BY	CHK'D BY
9/10/11	9/10/15
T.ASAKAWA	S.A.HIRAMOTO
APP'D BY	尺
9/10/15	3/4
M.FUKUSHIMA	A
DATE	SCALE

MOLEX	MOLEX-JAPAN CO.,LTD.
日本モレックス株式会社	
REVISE ONLY ON CAD SYSTEM	
TITLE 名称	
KK 5.08/10.16	
WAVER ASS'Y	
DWG. NO.	REV
SD-5283-NA	C