
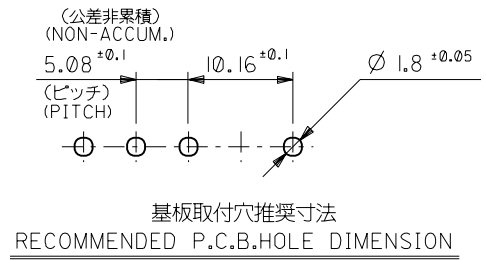


DWG. NO.

SD-5286-NA

ALL DIMENSIONS IN METRIC DO NOT SCALE DRAWING

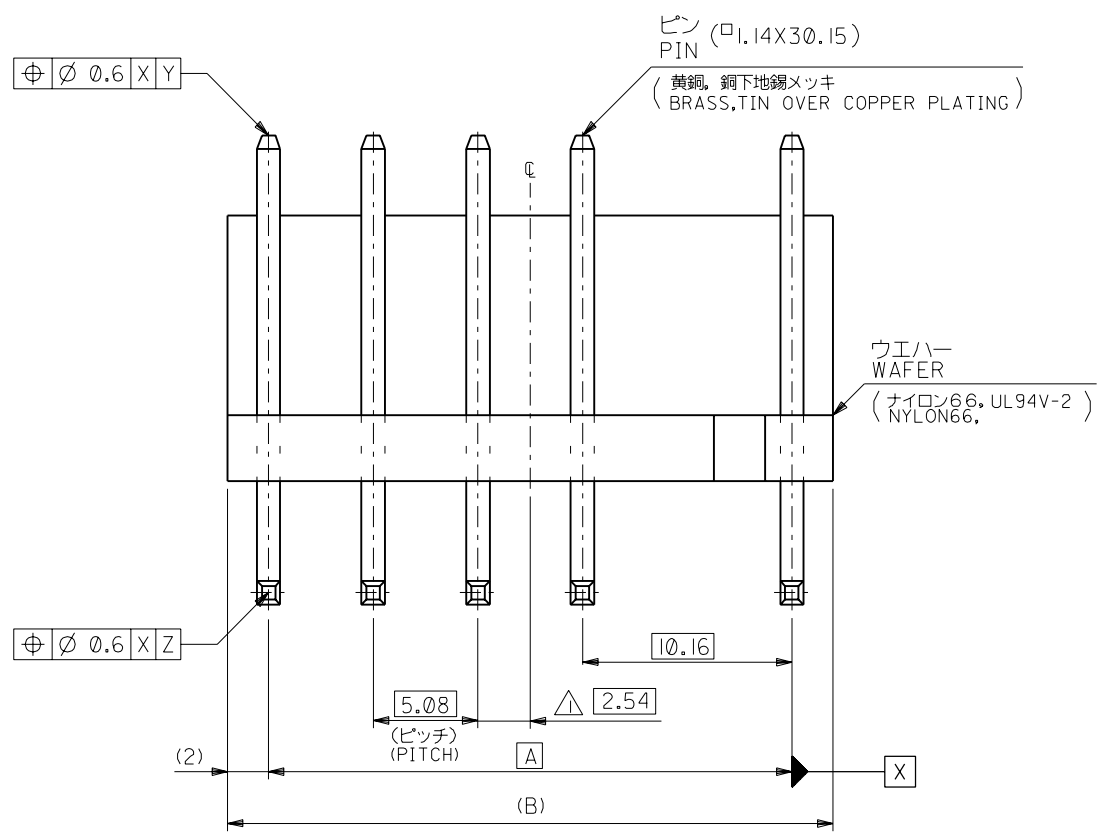

注記
NOTE

- △ 全極数が偶数の場合のみ適用。
TO BE APPLIED ONLY WHEN ALL CKTS. ARE EVEN.
- 2 ウエハーのそりは、長さ 25.4 に対して0.24 MAX..
CAMBER MUST BE 0.24 MAX. PER 25.4

34.48	30.48	10-68-1067	5286-06A	6
29.4	25.4	↑ -1057	↑ -05A	5
24.32	20.32	↑ -1047	↑ -04A	4
19.24	15.24	↓ -1037	↓ -03A	3
14.16	10.16	10-68-1027	5286-02A	2
B	A	EDP NO.	ENG. NO.	極数 NO. OF CKTS.

材料 MATERIAL				図中参照 SEE DRAWING		MOLEX-JAPAN CO.,LTD. 日本モレックス株式会社	
仕上げ FINISH				—H—		REVISE ONLY ON CAD SYSTEM	
適用電線範囲 WIRE RANGE				—H—		TITLE 名称	
被覆外径 INS. RANGE				—H—		KK 5.08/10.16 WAFER ASS'Y WITH LOCK	
DRAWN BY '94/07/12 T.ASAKAWA				CHK'D BY '94/07/12 Y.M.H.HIRAMOTO		DWG. NO.	
APP'D BY '94/07/12 M.FUKUSHIMA				尺度 SCALE 4 : 1		SD-5286-NA	
角 度 ANGLE				±30°		REV	
30 以上 OVER				±0.3		D	
10 以上 OVER 30 未満 UNDER				±0.25			
10 未満 UNDER				±0.2			
D 再作図&変更 REDRAWN & REVISED (J40554)				T.A. H.H.			
記号 LTR				変更内容 REVISION RECORD			
一般公差 GENERAL TOLERANCES				DR. CHK. 日付 DATE			