


■ bestückt / assemble

Leiterplatten-Lochbild / PCB drillhole pattern

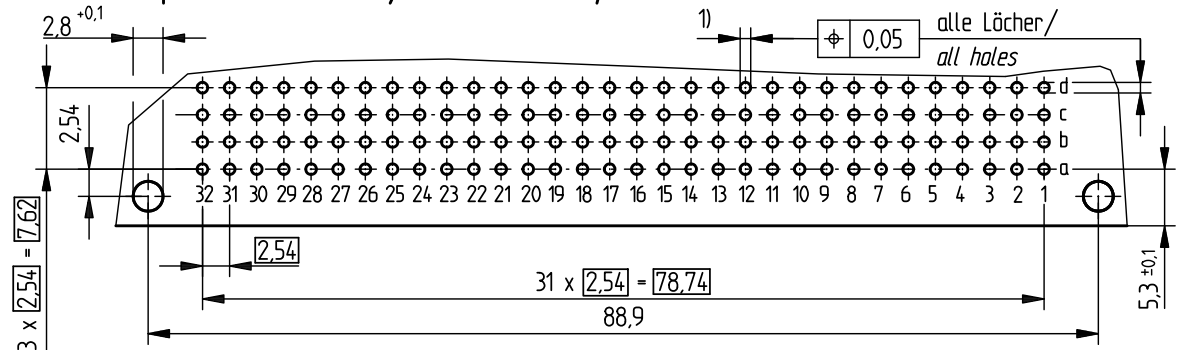

- Bedruckung siehe Zeichnung 294875
 Marking see drawing 294875
 Elastische Einpresszone / compliant pressfit zone
 Isolierwerkstoff / housing material : PBT GF30
 Bauart 7 / type 7
 Anforderungsstufe 2 = 400 Steckzyklen / performance class 2 = 400 mating cycles
 Fehlende Masse und Angaben gemäß IEC 60 603-2 / DIN EN 60 603-2
 Missing information and dimensions according to IEC 60 603-2 / DIN EN 60 603-2
 Schichtaufbau im metallisierten Loch siehe Zeichnung 114124
 diameter of drilled hole see drawing 114124
- $\phi 1.0 \pm 0.09$ Durchmesser des metallisierten Loches
 $\phi 1.0 \pm 0.09$ Diameter of finished plated-through hole
 $\phi 1.15 \pm 0.025$ Bohrungsdurchmesser des Loches
 $\phi 1.15 \pm 0.025$ Diameter of drilled hole

Information: All rights reserved. Only for information. To insure that this is the latest version of this drawing, please contact one of the ERNI companies before using.	Tolerances	 All Dimensions in mm	Scale	2.1
	Subject to modification without prior notice. Drawing will not be updated.		Designation	Federleiste RD 128 EE Fem. Con. RD 128 Pressfit
www.ERNI.com	374279		1	
a	15.04.2010	STVRD		
Index	Date	V:00069588.SZA		

Consider protection memo from DIN 34.