

OEG Miniature Relay PCF


TE Internal #: 100190-2

OEG Miniature Relay PCF, RJ25 Connectors, Single Port, Port Matrix Configuration 1 x 1, Standard Profile, RJ Type Jacks & Plugs

[View on TE.com >](#)



Connectors > Modular Jacks & Plugs > RJ25 Connectors > RJ25 Connectors

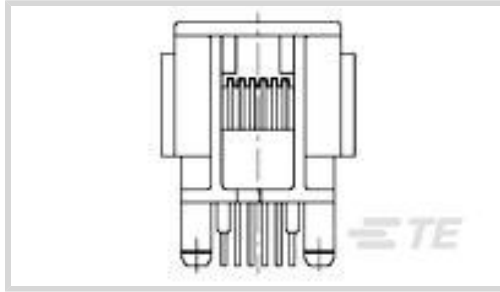

Port Configuration: **Single Port**

Port Matrix Configuration: **1 x 1**

Connector Profile: **Standard**

Modular Jacks & Plugs Products: **RJ Type Jacks & Plugs**

Connector Contact Density: **Standard**

[All RJ25 Connectors \(34\)](#)

## Features

### Product Type Features

Connectors & Connector Components Type	Connector
Modular Jack & Plug Interface Type	RJ25
Connector Product Type	Connector Assembly
Modular Jacks & Plugs Products	RJ Type Jacks & Plugs
Modular Connector Style	Jack
Connector System	Cable-to-Board
Grounding Options	None
Connector & Contact Terminates To	Printed Circuit Board

### Configuration Features

Status Indicator Type	None
Port Configuration	Single Port
Port Matrix Configuration	1 x 1
Connector Contact Density	Standard
PCB Mount Orientation	Vertical
Number of Positions	6

### Body Features

Connector Profile	Standard
-------------------	----------



Modular Jack Latch Orientation	Standard - Latch Down
--------------------------------	-----------------------

### Contact Features

	50 µin
Contact Underplating Material	Nickel
Contact Base Material	Phosphor Bronze
Contact Mating Area Plating Material	Gold
Contact Current Rating (Max)	1.5 A
PCB Contact Termination Area Plating Material	Tin-Lead

### Termination Features

Termination Method to Printed Circuit Board	Through Hole - Solder
Termination Post & Tail Length	3.15 mm[.124 in]

### Mechanical Attachment

Panel Mount Feature Type	Panel Stops
Mating Alignment	Without
Connector Mounting Type	Board Mount
Panel Mount Feature	With

### Housing Features

Mating Entry Location	Top
Housing Color	Black
Housing Material	PBT
Centerline (Pitch)	1.02 mm[.04 in]

### Dimensions

Connector Height	19.6 mm[.772 in]
PCB Thickness (Recommended)	1.6 mm[.062 in]

### Usage Conditions

Operating Temperature Range	-40 – 70 °C[-40 – 158 °F]
-----------------------------	---------------------------

### Operation/Application

Shielded	No
Circuit Application	Signal

### Industry Standards

Performance Category	Cat 3
UL Flammability Rating	UL 94V-0

## Packaging Features

Packaging Method	Loose Piece
Packaging Quantity	700

## Product Compliance


[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUN 2020 (209) Not Yet Reviewed
Halogen Content	Not Yet Reviewed for halogen content
Solder Process Capability	Wave solder capable to 265°C

### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE's information on SVHC in articles for this part number is still based on the European Chemical Agency (ECHA) 'Guidance on requirements for substances in articles' (Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An Article Always An Article) stating that, in case of 'complex object', the threshold for a SVHC must be applied to both the product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling based on the new ECHA "Guidance on requirements for substances in articles" (June 2017, version 4.0) and will be updating its statements accordingly.

## Compatible Parts

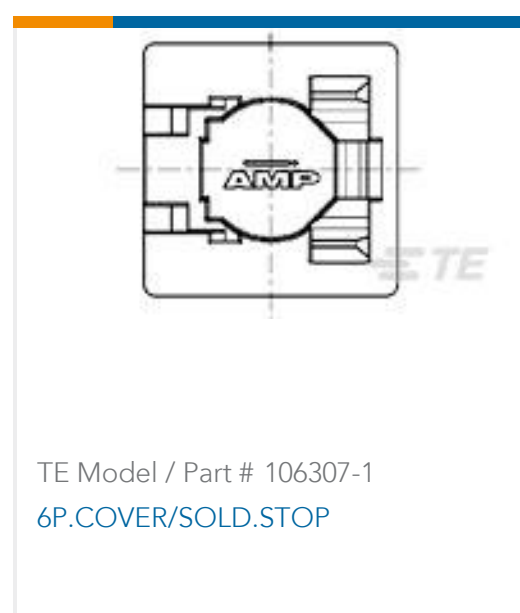


Also in the Series | [OEG Miniature Relay PCF](#)



Combo Jacks(2)



Mini PCI Express & mSATA(1)

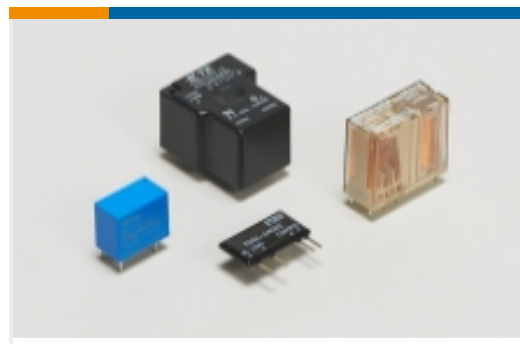

Power Relays(4)



RJ14 Connectors(3)



RJ22 Connectors(3)




RJ25 Connectors(10)



RJ45 Connectors(70)



Wire-to-Board Connector Contacts(1)

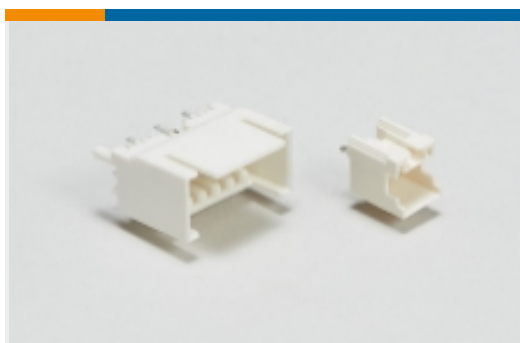

Wire-to-Board Headers & Receptacles (1)

## Customers Also Bought



TE Model / Part #5-1879354-4  
RR03 5% 51R AMMO



TE Model / Part #3-640602-4  
04P MTA156 CONN ASSY 24AWG LF



TE Model / Part #338360-1  
8/8 MOD.JACK ASSY TE



TE Model / Part #3-641238-7  
07P MTA100 CONN ASSY NATL 30AU



TE Model / Part #2-2834068-2  
PIN CONTACT,MINIATURE  
WATERPROOF CONN




TE Model / Part #1744057-4  
3.96 EP HDR ASSY 4P W/PEGS



TE Model / Part #826955-2  
2P MOD2 STIFT LEI



TE Model / Part #1625870-2  
RP 1J 10K 0.1% 50PPM 1K RL

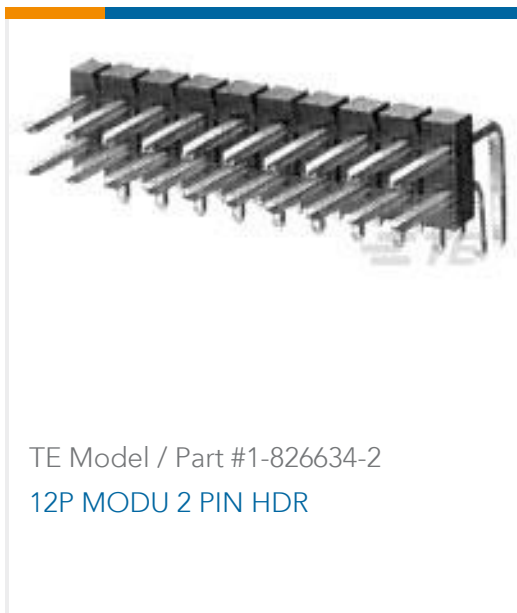

## Documents

### Product Drawings

[6/6 PCB MOD.JACK TE](#)

English

### CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG\\_CVM\\_CVM\\_100190-2\\_F.2d\\_dxf.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_100190-2\\_F.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_100190-2\\_F.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

### Product Specifications

[side entry, bottom entry, top entry and toolless modular jack](#)

English

[Product Specification](#)

English

### Agency Approvals

[UL Report](#)

English