


## ▶ 100671 PROBE

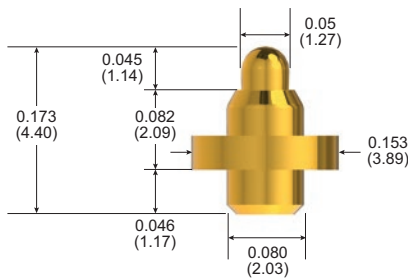

### PROBE SPECIFICATIONS

<b>Minimum Centers</b>	0.175 (4.45)
<b>Current Rating</b>	3 A continuous <i>(individual probe in free air @ ambient temperature)</i>
<b>Spring Force</b>	145 g @ 0.027 (0.69) travel
<b>Typical Resistance</b>	< 10 mΩ
<b>Maximum Travel</b>	0.04 (1.02)*
<b>Working Travel</b>	0.027 (0.69)

### MATERIALS


<b>Barrel</b>	Nickel/silver, gold plated
<b>Spring</b>	Stainless steel, gold plated
<b>Plunger</b>	Beryllium copper, gold plated

### HOW TO ORDER

<b>Part Number</b>	100671-000
--------------------	------------

\*Not recommended for use at maximum travel

## ▶ 101111 PROBE



### PROBE SPECIFICATIONS

<b>Minimum Centers</b>	0.029 (0.75)
<b>Current Rating</b>	6 A continuous <i>(individual probe in free air @ ambient temperature)</i>
<b>Spring Force</b>	43 g @ 0.022 (0.55) travel
<b>Typical Resistance</b>	< 50 mΩ
<b>Maximum Travel</b>	0.025 (0.58)
<b>Working Travel</b>	0.022 (0.55)

### MATERIALS

<b>Barrel</b>	Phosphor bronze, gold plated
<b>Spring</b>	Music wire, gold plated
<b>Plunger</b>	Phosphor bronze, gold plated

### HOW TO ORDER

<b>Part Number</b>	101111-000
--------------------	------------