
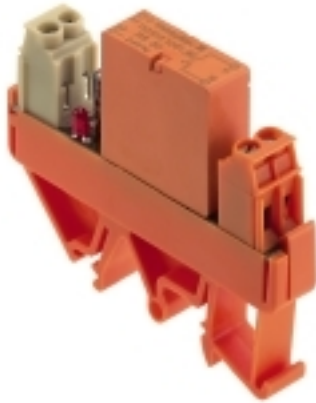


**RS 30 230VAC LD LP 1A**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

**Product image**

Similar to illustration

**General ordering data**

Version	RS-SERIES, Relay module, Number of contacts: 1, NO contact AgNi 0.15 gold flashed, Rated control voltage: 230 V AC +5 % / -15 %, Continuous current: 3 A, Screw connection, Test button available: No
Order No.	<a href="#">1102221001</a>
Type	RS 30 230VAC LD LP 1A
GTIN (EAN)	4032248046010
Qty.	10 pc(s).
Delivery status	<b>This article will no longer be available in the future.</b>
Available until	2022-11-25

Creation date: [27.03.2024](#) 5:09:38 PM CET

## RS 30 230VAC LD LP 1A

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

### Dimensions and weights

Depth	56 mm	Depth (inches)	2.205 inch
Height	70 mm	Height (inches)	2.756 inch
Width	11.2 mm	Width (inches)	0.441 inch
Net weight	31 g		

### Temperatures

Storage temperature	-40 °C...60 °C	Operating temperature	-25 °C...40
Humidity	40 °C / 93 % rel. humidity, no condensation		

### Control side

Rated control voltage	230 V AC +5 % / -15 %	Rated current AC	3.2 mA
Power rating	0.8 VA	Status indicator	red LED

### Load side

Rated switching voltage	250 V AC	Continuous current	3 A
Max. switching frequency at rated load	0.1 Hz	Max. switching voltage, AC	250 V
Inrush current	8 A	AC switching capacity (resistive), max.	2000 VA
Switch-on delay	≤ 10 ms	Switch-off delay	≤ 9 ms
Contact type	1 NO contact (AgNi 0.15 gold flashed)	Electrical service life, DC coil	> 5x10 <sup>5</sup> switching cycles
Mechanical service life	20 x 10 <sup>6</sup> switching cycles	Min. switching power	250 mW

### General data

Version	soldered relay	Rail	TS 32, TS 35
Test button available	No	Mechanical switch position indicator	No
Colour	orange		

### Insulation coordination

Rated voltage	250 V	Pollution severity	2
Surge voltage category	III	Creepage and clearance distance input - output	> 3 mm
Impulse withstand voltage	4 kV	Protection degree	IP20

### Connection data

Wire connection method	Screw connection	Stripping length, rated connection	8 mm
Clamping range, rated connection	2.5 mm <sup>2</sup>	Clamping range, min.	0.5 mm <sup>2</sup>
Clamping range, max.	4 mm <sup>2</sup>		

### Classifications

ETIM 6.0	EC001437	ETIM 7.0	EC001437
ETIM 8.0	EC001437	ETIM 9.0	EC001437
ECLASS 9.0	27-37-16-01	ECLASS 9.1	27-37-16-01
ECLASS 10.0	27-37-16-01	ECLASS 11.0	27-37-16-01
ECLASS 12.0	27-37-16-01	ECLASS 13.0	27-37-16-01

**Data sheet**

**RS 30 230VAC LD LP 1A**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

**Technical data**

**Approvals**

Approvals



ROHS

Conform

**Downloads**

Approval/Certificate/Document of  
Conformity

[DE\\_PA\\_5600\\_160311\\_001.pdf](#)

Catalogues

[Catalogues in PDF-format](#)