


LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
	D	ECR-15-007468	09JUN2015	GSK	JB



PN 0-1 As Shown

Contact arrangement view from connecting side

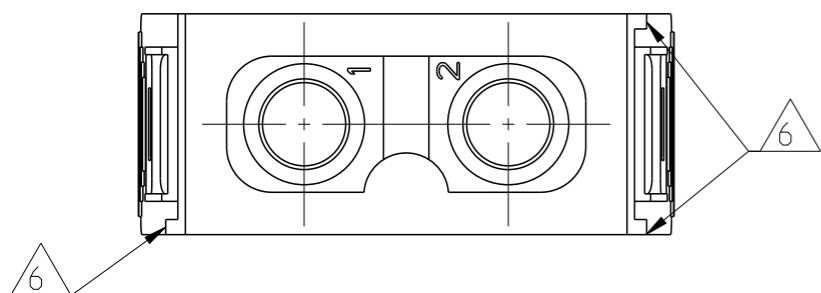


NOTES

- 1 SUITABLE CRIMP CONTACTS: SERIES HSK
CUSTOMER DRAWING: 1108756
OUTER DIMENSIONS OF INSULATION: MAX. Ø8mm
- 2 SUITABLE MODULE FIXING FRAME: SERIES HVS SIZE 3 TO 8
CUSTOMER DRAWING: 1103250
- 3 SUITABLE INSERTION TOOL:
CUSTOMER DRAWING: 1102855
- 4 SUITABLE EXTRACTION TOOL:
CUSTOMER DRAWING: 1102855
- 5 STANDARDS:
DIN EN 61984; DIN EN 60664-1
- 6 POLARIZATION RIPS
- 7 MARKING OF POLARIZATION ACCORDING TO MARKING OF MODULE FRAME
- 8 PACKAGING:
10 PIECES IN A CARTON

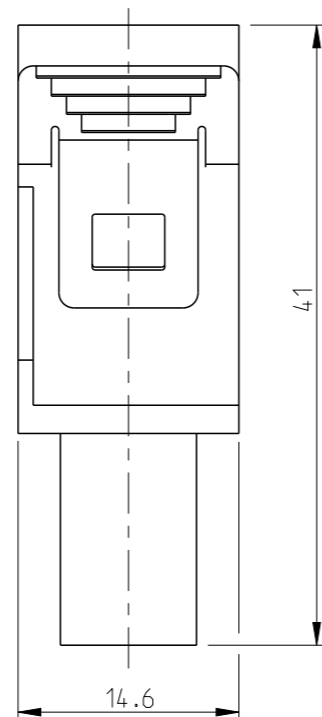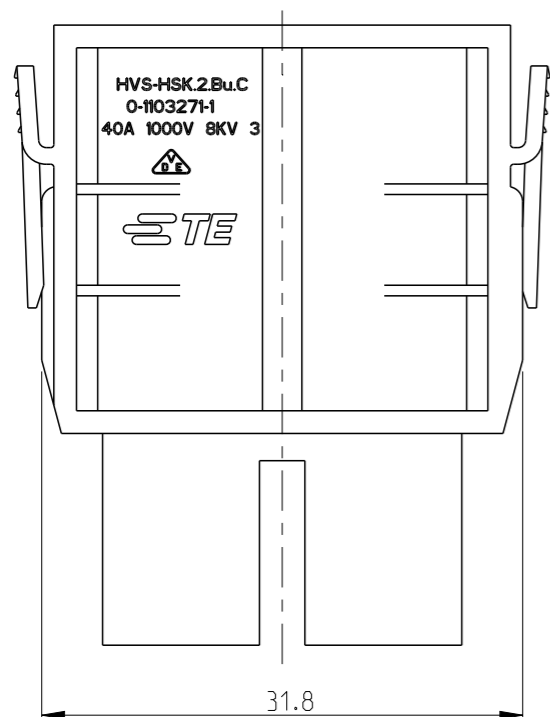


PN 0-1 As Shown

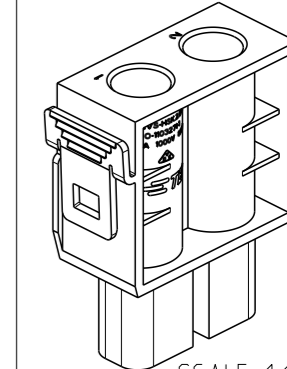

SCALE 1:1

Contact arrangement view from termination side

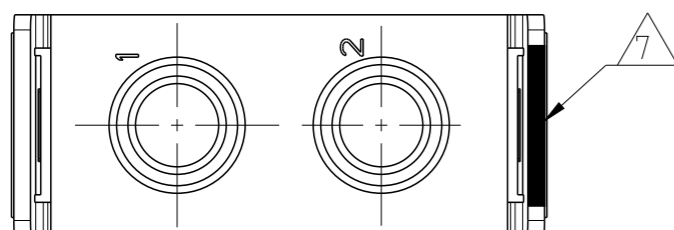

1	DESCRIPTION	MATERIAL	COLOR	ITEM NO
0-1	FEMALE INSERT	PBT-GF10	LIGHT GREY	1

HVS-HSK.2.BU.C				
		TE Connectivity		
		NAME FEMALE INSERT ASSY HVS-HSK.2.BU.C		
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO	
A3	00779	©-1103271		
CUSTOMER DRAWING		SCALE 2:1	SHEET 1 OF 1	REV D

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	20.02.2006
		CHK	20.02.2006
		APVD	20.02.2006
		PRODUCT SPEC	108-74081
		APPLICATION SPEC	114-74083
		WEIGHT	0.008 kg
		CUSTOMER DRAWING	

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	ISO 8015 DIN 150 2768 mm-E DIN 16901-120
	0 PLC ±
	1 PLC ±
	2 PLC ±
	3 PLC ±
	4 PLC ±
	ANGLES ±
MATERIAL	FINISH