


DATE	SYM	REVISION RECORD	AUTH.	DR.	CK.
8/19/98	-	ISSUED		NT	MM
11/4/99	A	OTHERWISE SPECIFIED TOLERANCE ±.005 WAS ±.010		NT	DG

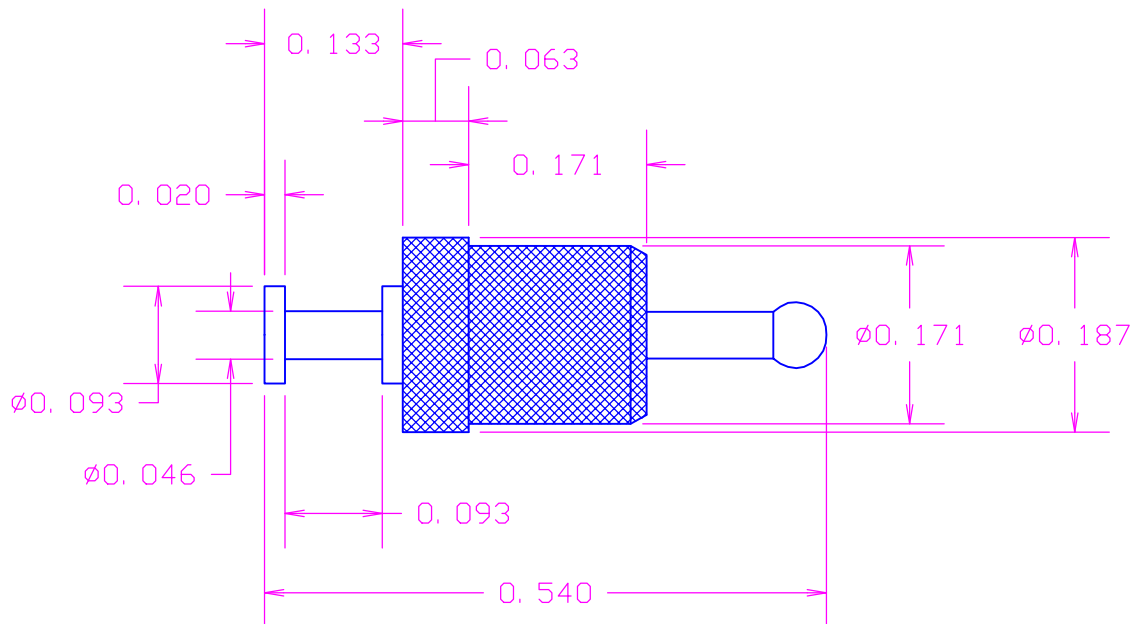

RECOMMENDED HOLE SIZE
FOR PRESS FIT INSERTION



MATERIAL: PIN- BRASS PER ASTM B16,
ALLOY C 36000, 1/2 HARD

BUSHING- PTFE PER ASTM D1710

COLOR(XX)- SEE COLOR CODE

FINISH: .0003"MIN. SILVER PER QQ-S-365

TYPE II, GRADE A, WITH NON-CHROMATE
PRESERVATIVE

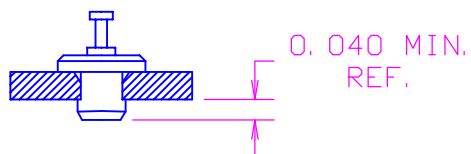


FOR BOARD THICKNESS GREATER THAN .040, X=60°

FOR BOARD THICKNESS LESS THAN .040, X=80°

(XX)COLOR CODE:
10-BLACK
11-BROWN
12-RED
13-ORANGE
14-YELLOW
15-GREEN
16-BLUE
17-VIOLET
18-GRAY
19-WHITE(NATURAL)

ACTUAL SIZE



TOLERANCES	CONCORD ELECTRONICS CORPORATION		
DECIMAL ± .005	P/N	SCALE	30 GREAT JONES ST. NEW YORK N. Y. 10012
FRACTIONAL ± 1/64	TITLE TERMINAL		
± 5°	DATE 8-19-98	DRAWING NUMBER 1116-02-01XX	