

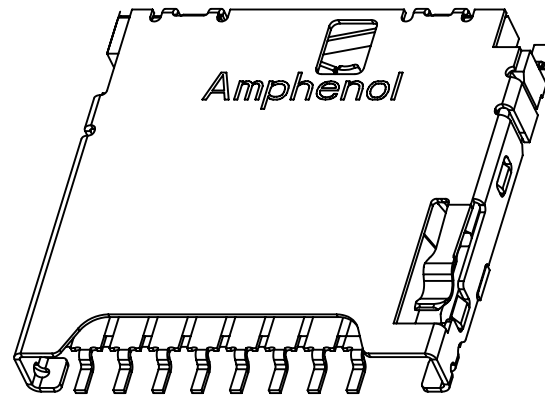
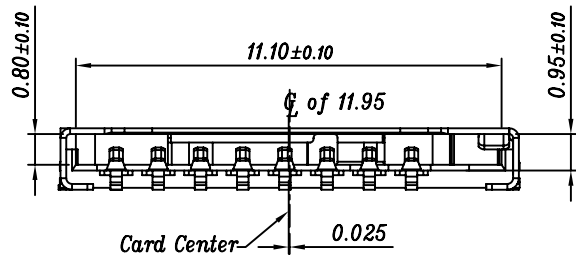
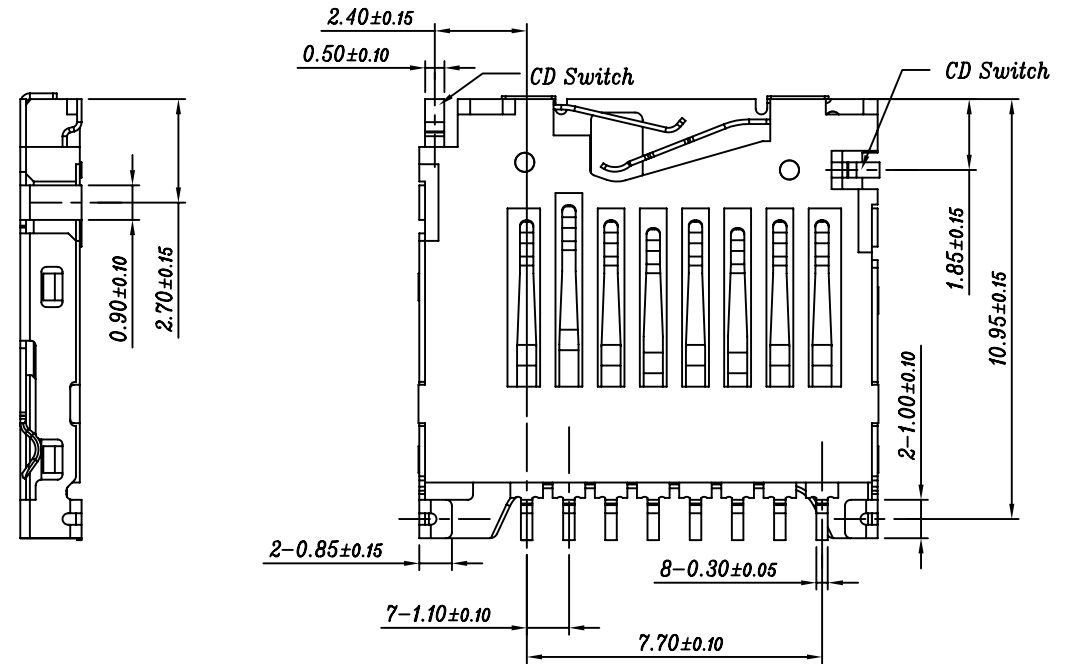
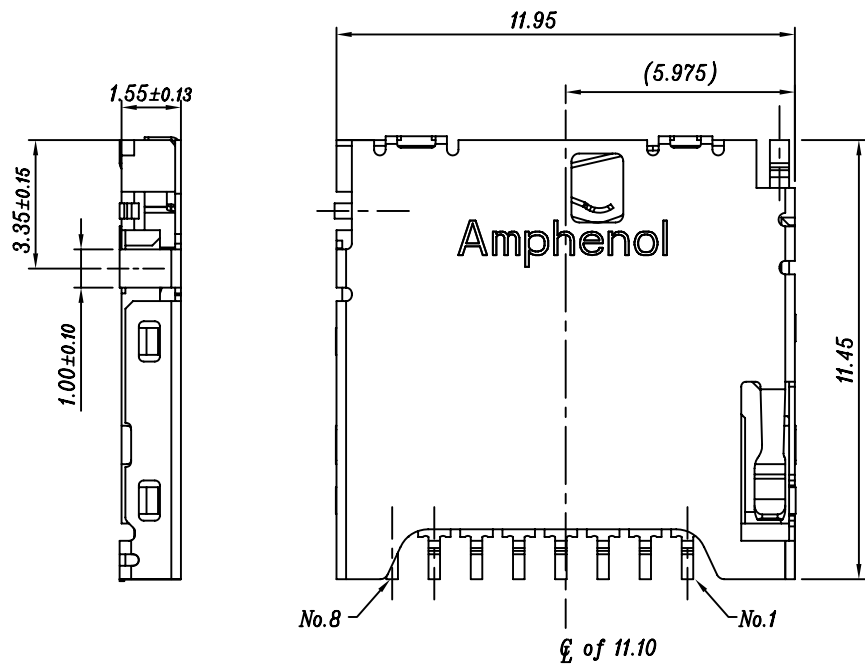


REV.	ECN.NO.	MODIFY.CONTENT	DATE
2	S0907005	Change The Switch Pin	7/01'09
3	ECN09110082	Widen switch pin	11/24'09
A	ECM0030260	Rev.A release	03/05'10




GENERAL TOLERANCE	TOLERANCE	FILE.NO.	114-00841	PART.NO.	114-00841-68	DRAWN	Ray lee	MATERIAL		SCALE	5:1
X±0.50	x.*±5°	REV.	A	TITLE	Micro SD None Push Connector Top Mount	CHECKED	Jane.Yu	DATE	03/05'2010	UNIT	MM
.X±0.38	.x.*±2°	SIZE		SHEET	1/2	APPROVED	Jane.Yu	Amphenol Shouhmin Industry			
.XX±0.25	.xx.*±1°	A4									

REV.	ECN.NO.	MODIFY.CONTENT	DATE
2	S0907005	Change The Switch Pin	7/01'09
3	ECN09110082	Widen switch pin	11/24'09
A	ECM0030260	Rev.A release	03/05'10

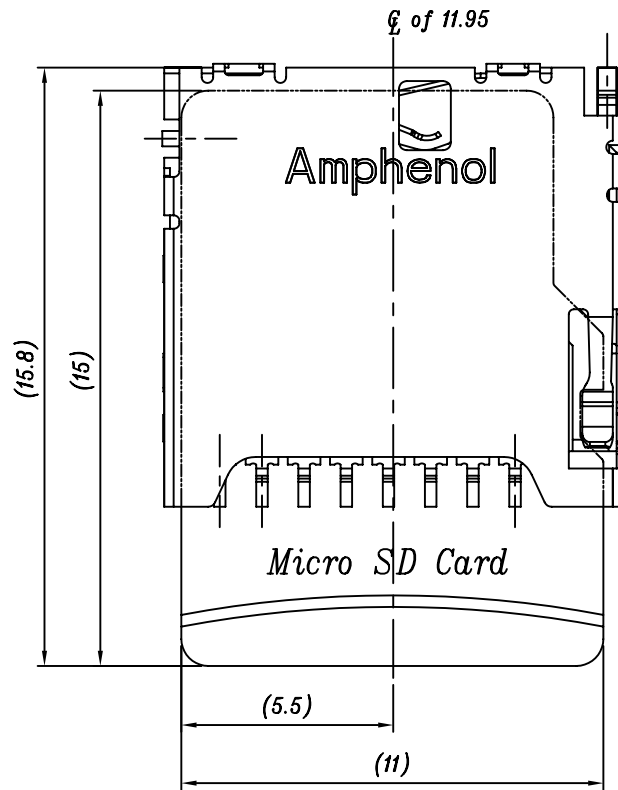




PIN Assignments

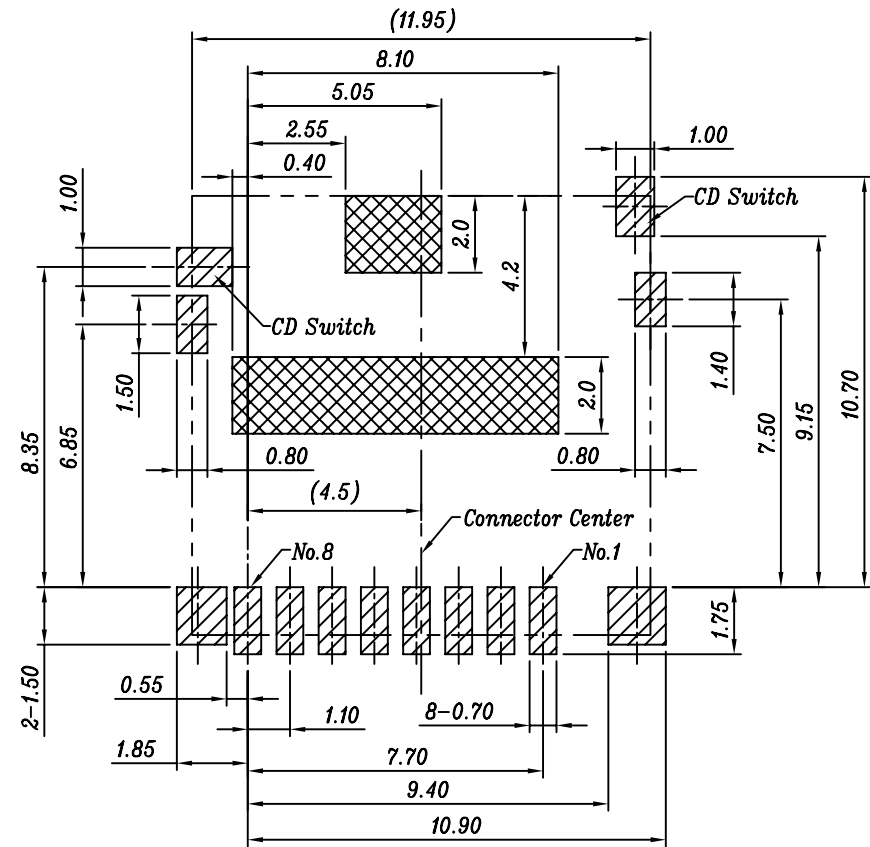PIN NO.	Micro SD
1	Date Line[Bit 2]
2	Card Detect/ Date Line[Bit 3]
3	Command/Response
4	Supply voltage
5	Clock
6	Supply voltage ground
7	Date Line[Bit 0]
8	Date Line[Bit 1]



RECOMMENDED P.C.B LAYOUT

P.C.B TOLERANCE: ± 0.05


-  Connector Area
-  PAD Area
-  Pattern Prohibited Area

Note:

1. Material:
Housing: LCP Black UL 94V-0
Contact: Copper alloy
Shell: Stainless steel
2. Plating:
Contact Area: Plating Au
Solder tail: Plating Tin
Shell: Plating weldable Ni
3. Tail Coplanarity 0.12mm Max.
4. The Part must compliant AMSI'S ROHS SPEC.

GENERAL TOLERANCE	FILE.NO.
$X \pm 0.50$	114-00841
$.X \pm 0.38$	A
$.XX \pm 0.25$	

TOLERANCE	REV.
$x' \pm 5^\circ$	A
$.x' \pm 2^\circ$	
$.xx' \pm 1^\circ$	A4



PART.NO.	TITLE	SHEET
114-00841-68	Micro SD None Push Connector Top Mount	2/2

DRAWN	CHECKED	APPROVED
Ray lee	Jane.Yu	Jane.Yu

MATERIAL	DATE
	03/05'2010

SCALE	UNIT
5:1	MM

Amphenol Shouhmin Industry