





DUAL-IN-LINE SOCKETS

SERIES 117, 317 • GULL WING SHRINK DIP SOCKETS & STRIPS, SMT SOLDER TAIL

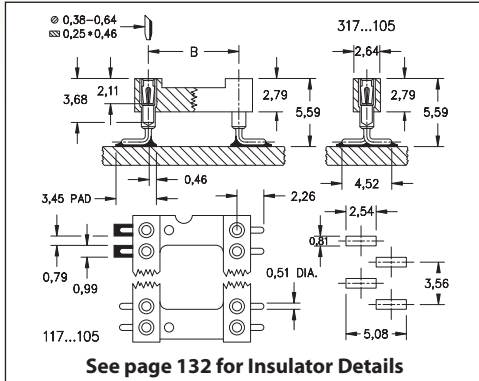

- Surface mount Gull Wing DIP & strip sockets for devices featuring 1,78 lead spacing
- Gull wing terminals provide maximum strength and permit easy visual inspection of solder joints
- Hi-Rel, 4-finger BeCu #30 contact is rated at 3 amps. See page 253 for details
- Series 117 and 317 use MM #1802 pins. See page 169 for details
- Insulators are high temperature thermoplastic, suitable for all soldering operations
- For Electrical, Mechanical and Environmental Data, see page 264 for details

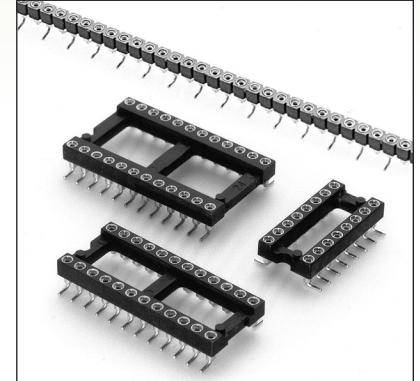

Total number of pins				Quantity per tube	ORDERING INFORMATION
	A	B	C		
16	14,53	7,62	9,91	35	117-XX-316-41-105000
28	25,20	10,16	12,45	20	117-XX-428-41-105000
30	26,97	10,16	12,45	18	117-XX-430-41-105000
48	42,98	10,16	12,45	12	117-XX-448-41-105000
20	18,08	15,24	17,53	28	117-XX-620-41-105000
28	25,20	15,24	17,53	20	117-XX-628-41-105000
40	35,86	15,24	17,53	14	117-XX-640-41-105000
42	37,64	15,24	17,53	13	117-XX-642-41-105000
48	42,98	15,24	17,53	12	117-XX-648-41-105000
52	46,53	15,24	17,53	11	117-XX-652-41-105000
56	50,09	15,24	17,53	10	117-XX-656-41-105000
64	57,20	15,24	17,53	9	117-XX-664-41-105000
68	60,76	15,24	17,53	8	117-XX-668-41-105000
64	57,20	19,05	21,34	8	117-XX-764-41-105000
XX=Plating Code See Below RoHS-2 2011/65/EU					
					
SINGLE ROW STRIP SOCKET If desired, we will supply any length up to 21 pins.					
21	37,64	---	2,64	-	317-XX-121-41-105000
See page 264 for coplanarity information					
SPECIFY PLATING CODE XX=					
Sleeve (Pin) 					
Contact (Clip) 					
91					
5,08µm Sn/Pb					
0,25µm Au					
41 ◆					
43 ◆					
5,08µm Sn					
0,76µm Au					

