


Quartz Crystal

SMD-version


model	KX – 7T
frequency	12,0 MHz
mode	fundamental
operating temperature	-40° ~ +85°C
frequency tolerance at +25°C	± 30 ppm
temperature tolerance -40° ~ +85°C	± 100 ppm
load capacitance C_L	12 pF
series resonance R1 max.	80 Ohm
aging at 25°C (first year) max.	± 2 ppm
shunt capacitance C_0 max.	3,5 pF
drive level max.	0,05 mW
contents of reel	1000 pcs.
part no.	12.88673

Dimensions (mm):


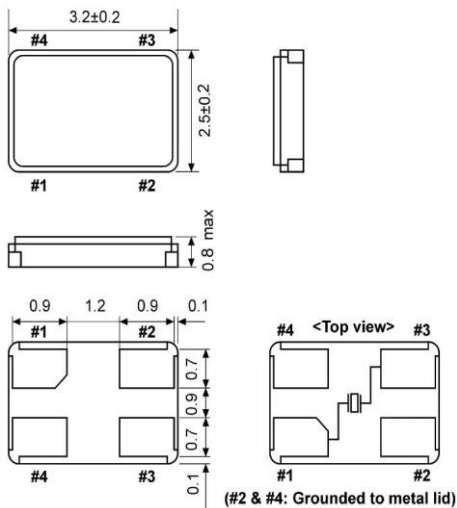


Suggested soldering pad:

Reflow soldering condition:

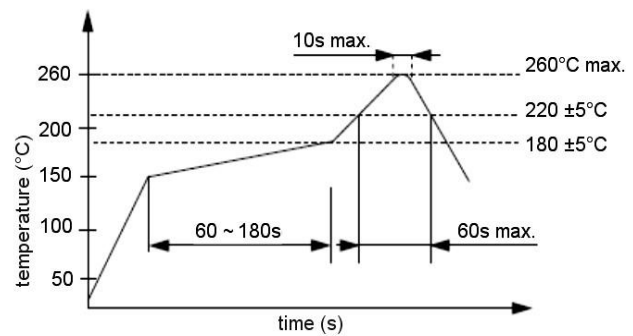

Tape specification:

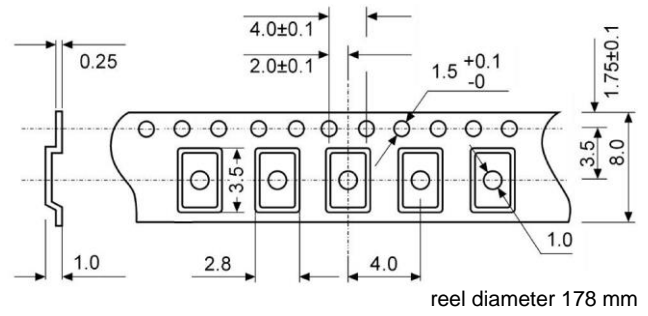

GEYER ELECTRONIC e.K. Lochhamer Schlag 5 82166 Gräfelfing/München
 Tel. +49 89 546868-0 quartz@geyer-electronic.de www.geyer-electronic.de

Version 16.01.2017