

6

5


4

3

2


1

FEMALE INSERT  
FRONT VIEW




1 BROWN  
2 WHITE  
3 BLUE  
4 BLACK

MALE INSERT  
FRONT VIEW



1 BROWN  
2 WHITE  
3 BLUE  
4 BLACK

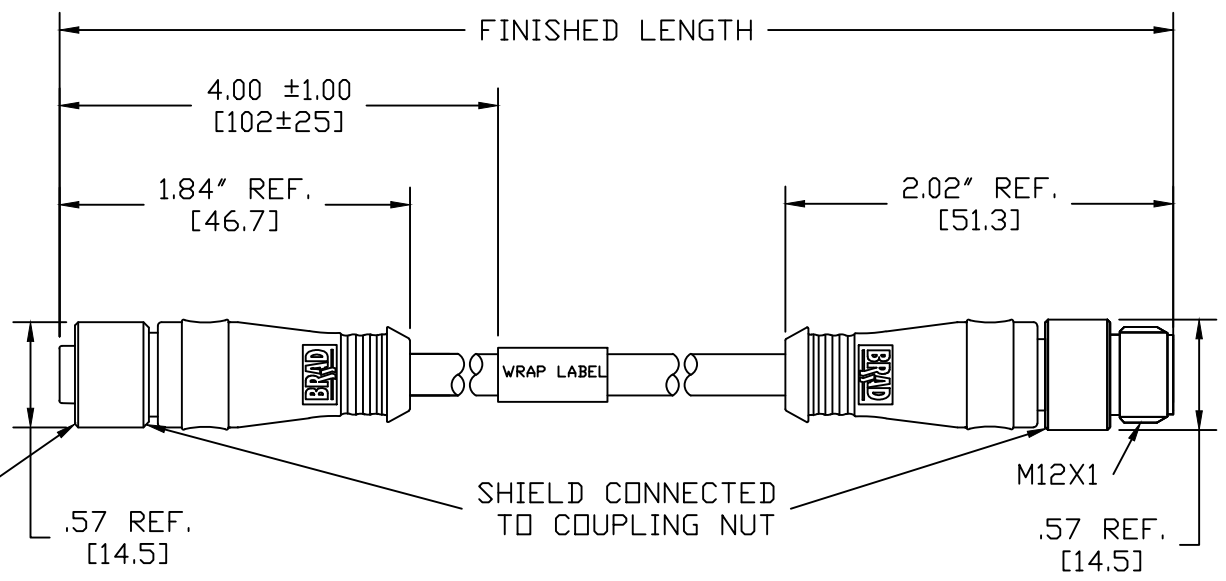

# 884S30D04MXXX

Wire type  
22/4C AWG  
Black PVC

cable length  
M020----2 Meter  
M100----10 Meter

**MECHANICAL**  
OVERMOLD: GRAY PBT w/ CONDUCTIVE MATERIAL  
INSERT: BLACK CELANEX  
SHIELD HOUSING: NICKEL PLATED BRASS  
O-RING: RED NITRILE  
CONTACTS: COPPER ALLOY, GOLD OVER NICKEL  
COUPLING NUT: NICKEL-PLATED BRASS  
CABLE: #22-4 BLACK PVC W/ BRAIDED SHIELD & 22AWG DRAIN

**ELECTRICAL**  
RATINGS: 250V AC/DC, 4A

**ENVIRONMENTAL**  
PROTECTION: IP67  
TEMPERATURE: -20°C to 105°C

RELEASED EC NO: IPC2014-0374 DRWN: BARDEN 2013/08/28 CHKD: VOU APPR: JFMURPHY 2013/10/30 REV A	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	
	$\nabla=0$ $\sphericalangle=0$	mm	INCH	IN/MM	NTS	INCH		
		4 PLACES ±---	±---	TWOLDEGE 2012/06/20	TITLE	MICRO CHANGE ASSEMBLY 4-POLE MALE/FEMALE ST/ST 360 SHLD		
		3 PLACES ±---	±.005	CHECKED BY DATE	MOLEX MOLEX INCORPORATED			
	2 PLACES ±0.13	±.010	---	APPROVED BY DATE	DOCUMENT NO.			
	1 PLACE ±0.25	±.020	ANGULAR ±1/2°	JFMURPHY 2013/10/30	SD-120069-027			
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			MATERIAL NO.	SHEET NO.			
	SIZE A	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						

6

5

4

3

2

1

E

D

C

B

A

E

D

C

B

A