

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [120079-0232](#)  
**Status:** **Active**  
**Overview:** Brad® Ultra-Lock® Connection System  
**Description:** Micro-Change® (M12) Ultra-Lock® Single-Ended Cordset, Female - Pigtail, Straight to 90°, Single Keyway, 4 Poles, Length 2.0m, PVC Cable

**Documents:**

[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

**Agency Certification**

CSA LR6837

**General**

Product Family	Industrial Cordsets
Series	<a href="#">120079</a>
Connector End A	Ultra-Lock® (M12)
Connector End B	Pigtail
IP Rating	IP69K
Overview	<a href="#">Brad® Ultra-Lock® Connection System</a>
Product Name	Micro-Change® (M12), Ultra-Lock® (M12)
Type	Single Ended
UPC	78678884752

**Physical**

Cable Diameter	5.33mm (.210")
Cable Length	2.0m
Color - Cable Jacket	Yellow
Coupling Style	Push to Lock
Gender	Female-Pigtail
Keyway	None
LED Indicator	No
Material - Cable Jacket	PVC
Material - Connector Body	PUR
Material - Contact	Phosphor Bronze
Material - Coupling Nut	Nickel-plated Brass
Material - O-Ring	Viton
Material - Plating Mating	Gold over Nickel
Net Weight	29.570/g
Orientation	Straight to 90°
Poles	4
Temperature Range - Operating	-25°C to +90°C
Wire Size AWG	22
Wire/Cable Type	UL 20327

**Electrical**


Current - Maximum per Contact	4A
Voltage - Maximum	250V

**Material Info**

Old Part Number W04001A09M020

**Reference - Drawing Numbers**

Sales Drawing SD-120079-011

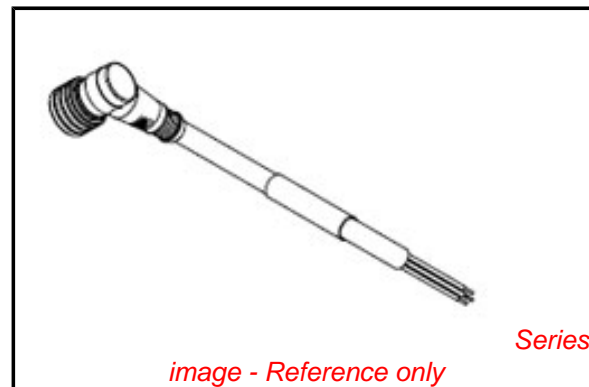

*image - Reference only*

**EU RoHS**

**ELV and RoHS  
Compliant**  
**REACH SVHC  
Not Reviewed**  
**Low-Halogen Status  
Not Reviewed**

**China RoHS**



**Need more information on product environmental compliance?**

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

**Search Parts in this Series**

120079Series

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**