



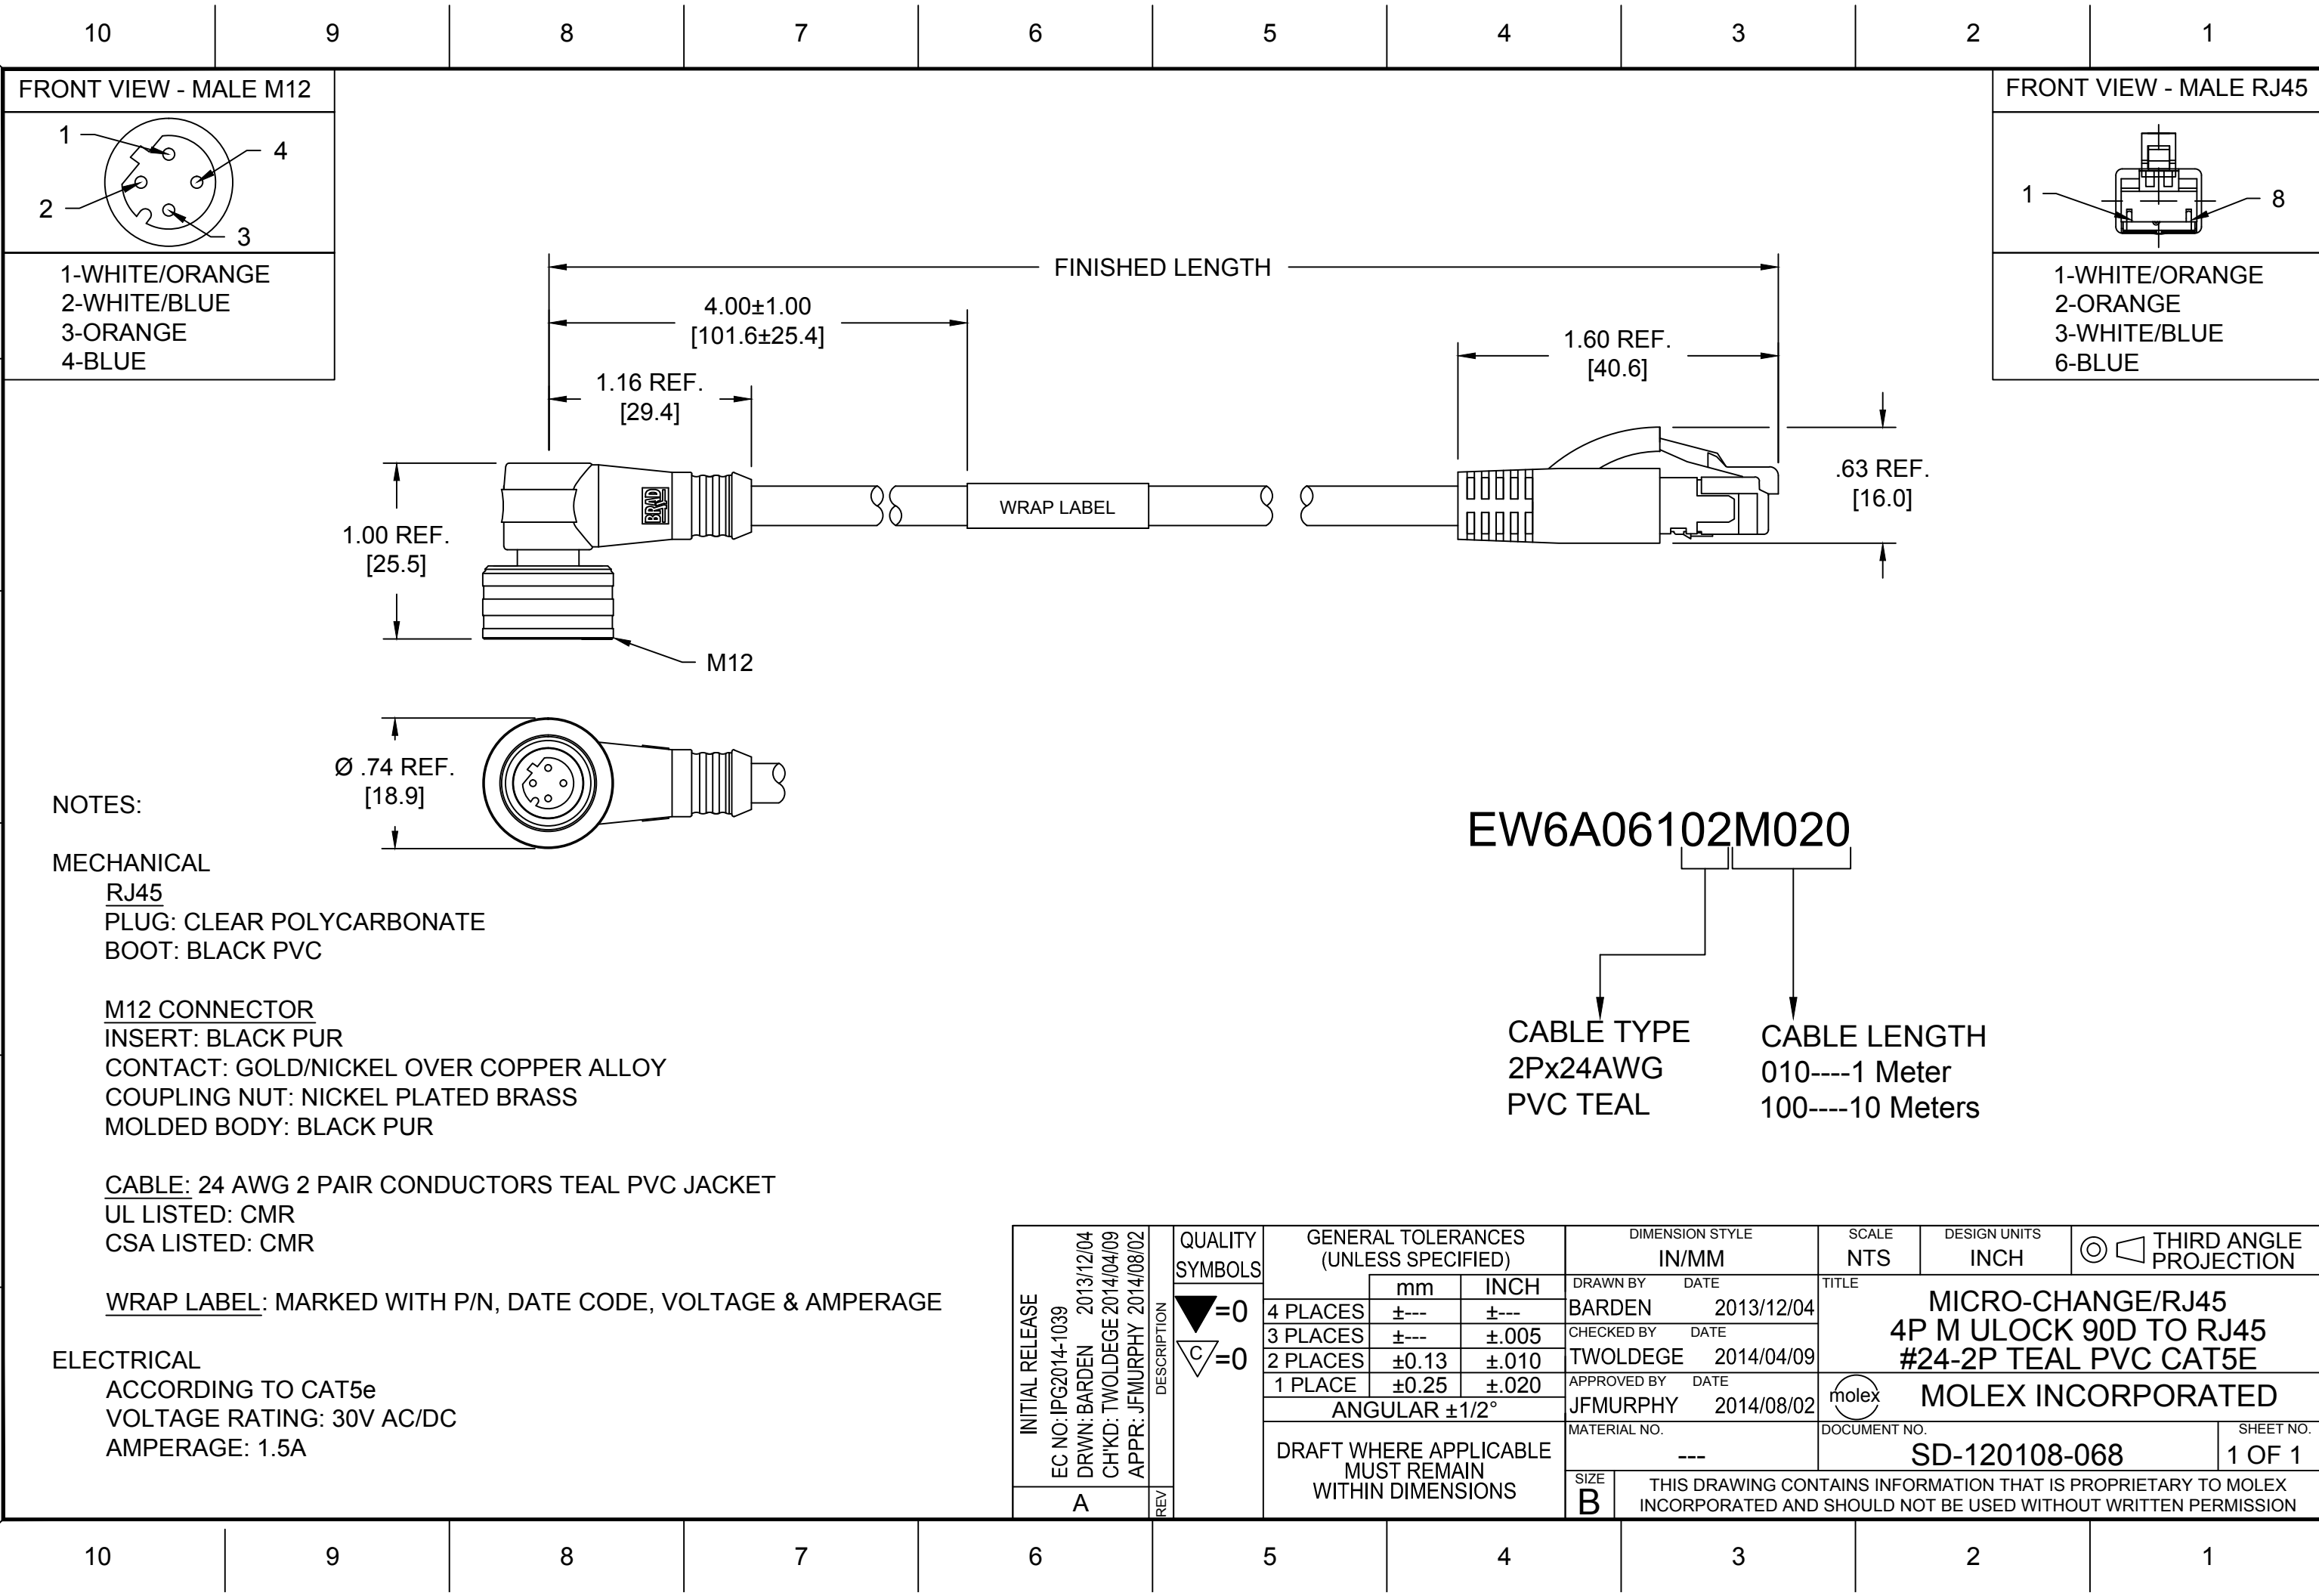


FRONT VIEW - MALE M12




1-WHITE/ORANGE
2-WHITE/BLUE
3-ORANGE
4-BLUE

FRONT VIEW - MALE RJ45

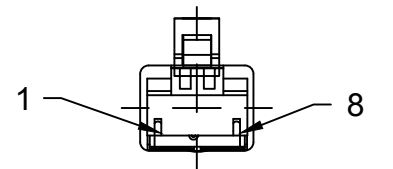

1-WHITE/ORANGE
2-ORANGE
3-WHITE/BLUE
6-BLUE

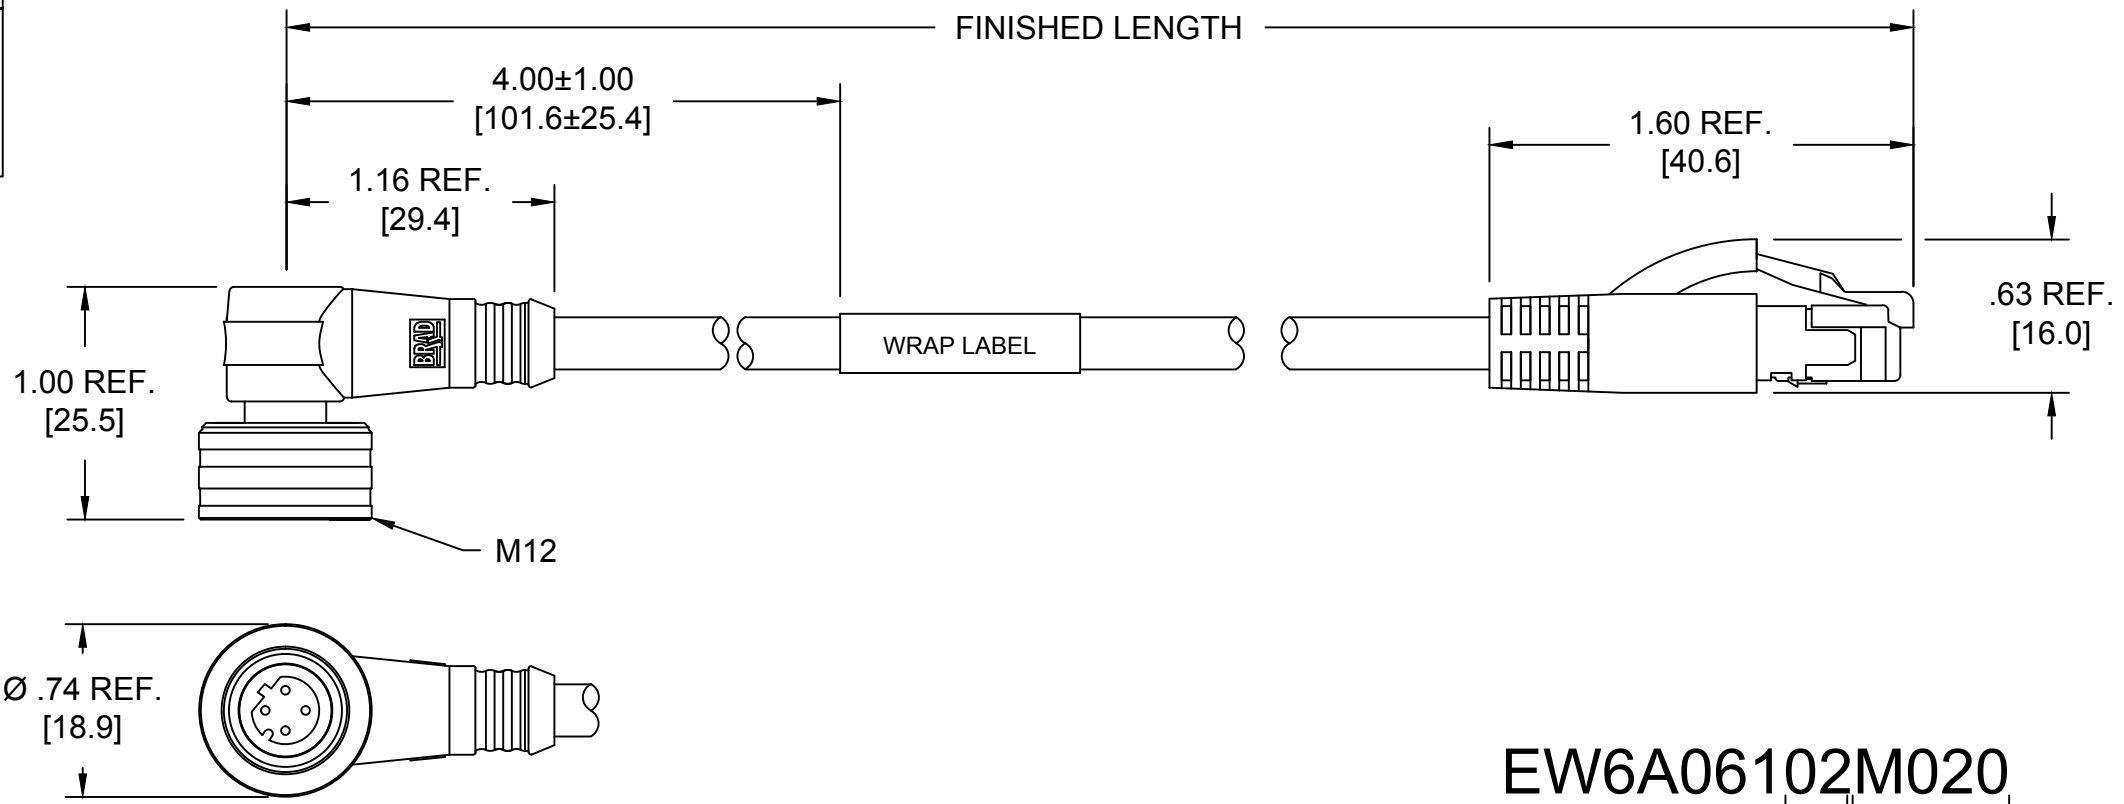

NOTES:

MECHANICAL

RJ45
PLUG: CLEAR POLYCARBONATE
BOOT: BLACK PVC

M12 CONNECTOR
INSERT: BLACK PUR
CONTACT: GOLD/NICKEL OVER COPPER ALLOY
COUPLING NUT: NICKEL PLATED BRASS
MOLDED BODY: BLACK PUR

CABLE: 24 AWG 2 PAIR CONDUCTORS TEAL PVC JACKET
UL LISTED: CMR
CSA LISTED: CMR

WRAP LABEL: MARKED WITH P/N, DATE CODE, VOLTAGE & AMPERAGE

ELECTRICAL
ACCORDING TO CAT5e
VOLTAGE RATING: 30V AC/DC
AMPERAGE: 1.5A

EW6A06102M020

CABLE TYPE
2Px24AWG
PVC TEAL

CABLE LENGTH
010----1 Meter
100----10 Meters

INITIAL RELEASE EC NO: IPG2014-1039 DRWN: BARDEN 2013/12/04 CH'KD: TWOLDEGE 2014/04/09 APPR: JFMURPHY 2014/08/02 A		DESCRIPTION REV	QUALITY SYMBOLS ▽=0 ▽C=0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE IN/MM		SCALE NTS	DESIGN UNITS INCH	THIRD ANGLE PROJECTION		
					mm	INCH	DRAWN BY DATE BARDEN 2013/12/04		TITLE MICRO-CHANGE/RJ45 4P M ULOCK 90D TO RJ45 #24-2P TEAL PVC CAT5E				
				4 PLACES	±---	±---	CHECKED BY DATE TWOLDEGE 2014/04/09						
				3 PLACES	±---	±.005	APPROVED BY DATE JFMURPHY 2014/08/02						
				2 PLACES	±0.13	±.010							
				1 PLACE	±0.25	±.020	MATERIAL NO. ---		DOCUMENT NO. SD-120108-068	SHEET NO. 1 OF 1			
				ANGULAR ±1/2°									
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS									
						SIZE B	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						