
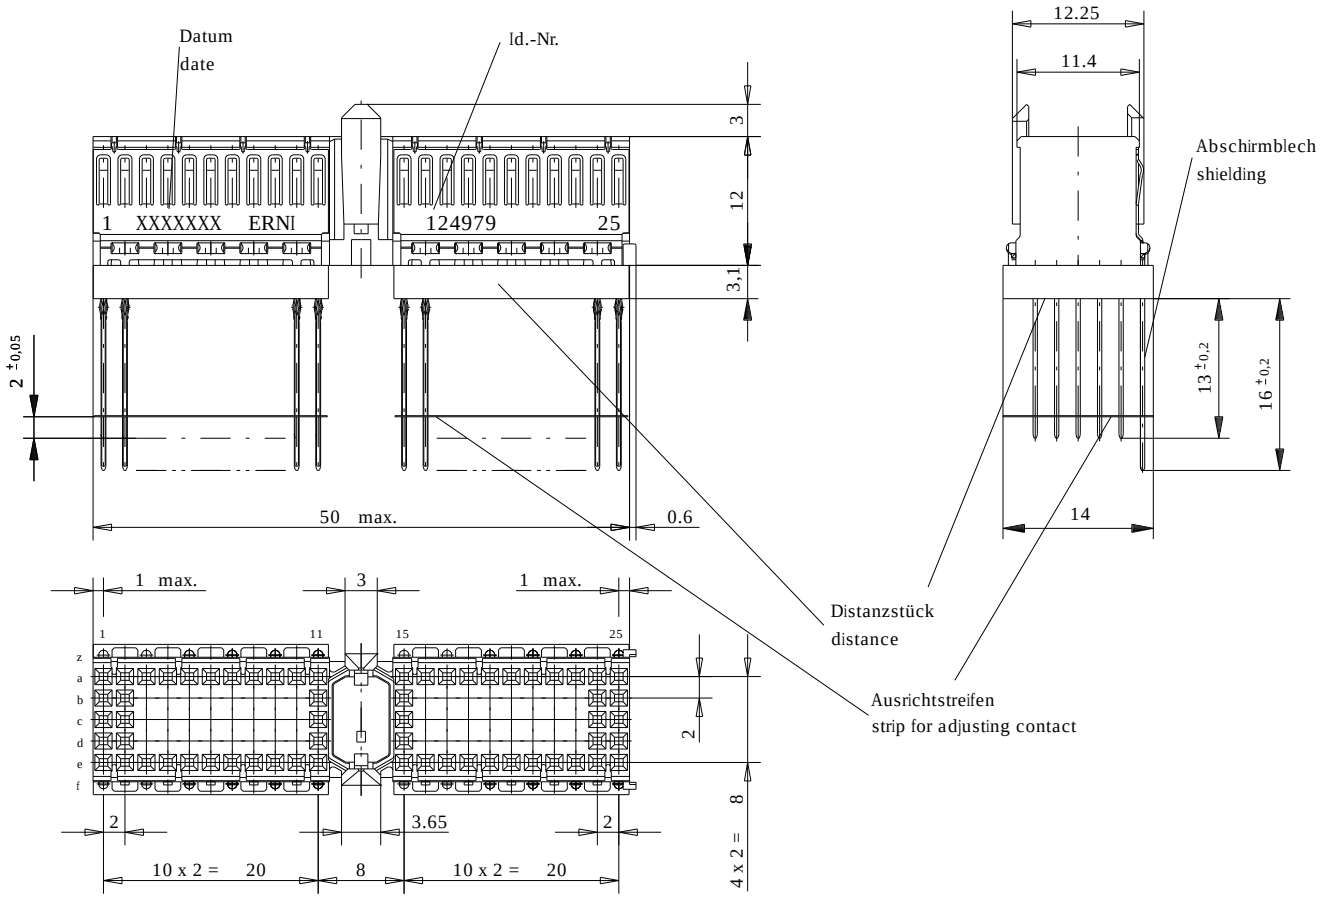



Bestückungsplan - contact layout

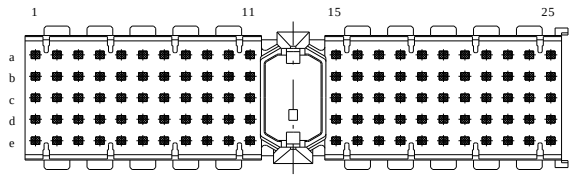

■ = bestückt - assemble

Lochbild für Leiterplatte (Bestückungsseite)

Board hole pattern (Component mounting side)

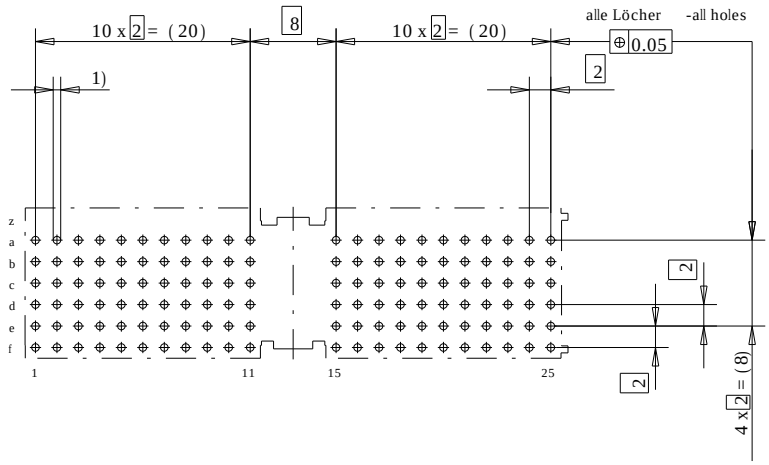

1) ø 0,6 ±0,05 Durchmesser des metallisierten Loches
ø 0,6 ±0,05 Diameter of finished plated-through hole

ø 0,7±0,02 Bohrungsdurchmesser des Loches
ø 0,7±0,02 Diameter of drilled hole

Schichtaufbau im metallisierten Loch siehe Zeichnung 114406

Metal plating of plated-through hole see drawing 114406

Fehlende Masse und Angaben nach IEC 61076-4-101
Missing information and dimensions per IEC 61076-4-101

Information: Distanzstück H=3.1 - distance H=3.1 Abschirmblech Reihe f montiert shielding row f mounted	Tolerances	All Dimensions in mm	Scale 2:1
			Angaben zu entsprechender Ident-Nr. siehe Fertigungsunterlagen For further information about I.D. number see manufacturing document
All rights reserved. Only for information. To insure that this is the latest version of this drawing, please contact one of the ERNI companies before using.	Subject to modification without prior notice. Drawing will not be updated.		Designation: ERmet-FS Federleiste A / ERmet-Female Straight Type A
		www.ERNI.com	124979
a / Index	08.06.2004 / Date	H:00041066.SZN	ERMA

Consider protection memo from DIN 34