

F

E

D

C

B

A

F




E

D

C


B

A

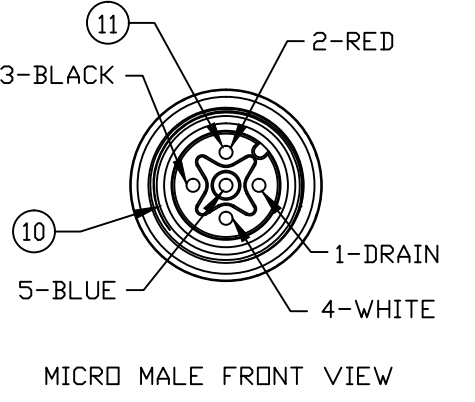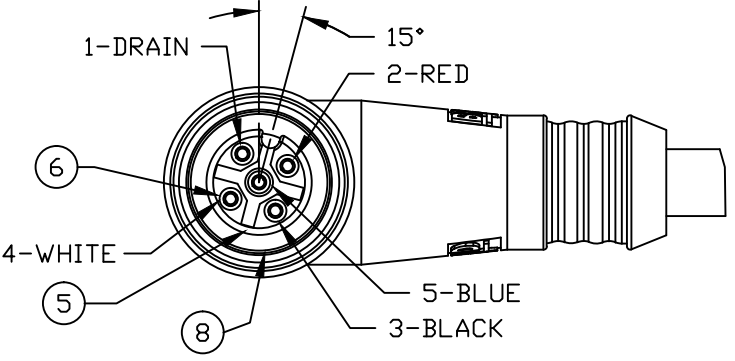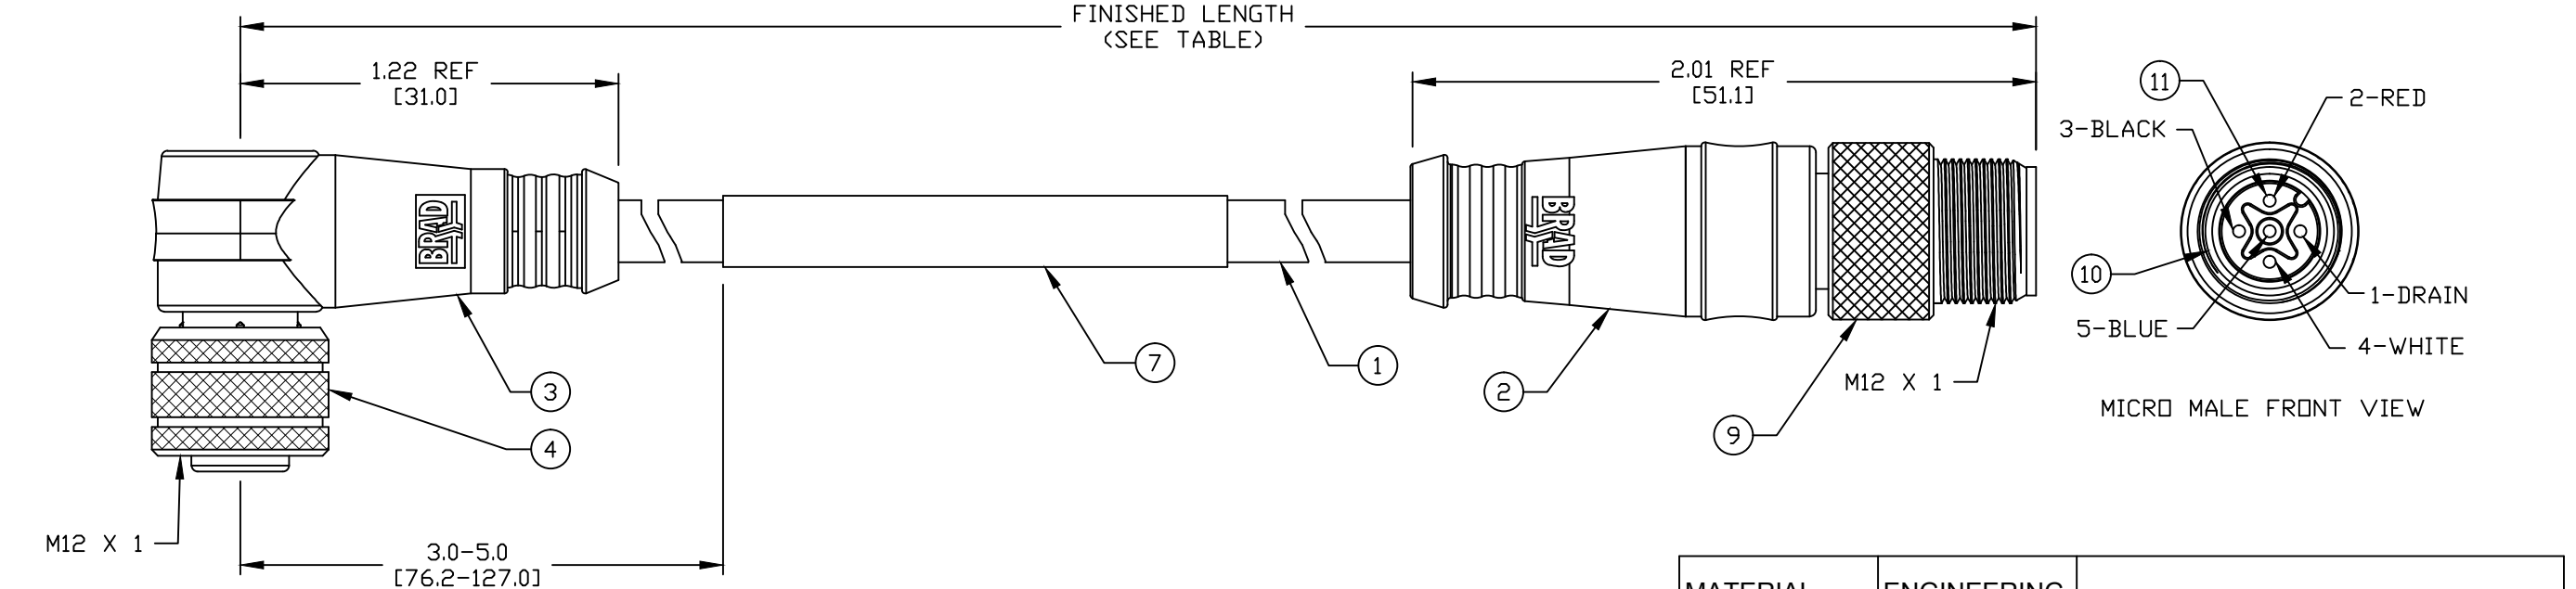

11	5	PIN CONTACT	COPPER ALLOY	GOLD PLATED
10	1	INSERT	NYLON	BLACK
9	1	COUPLING NUT	COPPER ALLOY	NICKEL PLATED
8	1	O-RING	NITRILE	RED
7	1	LABEL	PLASTIC FILM	BLACK/YELLOW
6	5	SOCKET CONTACT	COPPER ALLOY	GOLD PLATED
5	1	INSERT	NYLON	BLACK
4	1	COUPLING NUT	BRASS	NICKEL PLATED
3	1	OVERMOLD	PVC	GRAY
2	1	OVERMOLD	PVC	GRAY
1	1	DROP CABLE, 2 TWISTED PAIRS 26AWG CORD	PVC	GRAY
ITEM	QTY	DESCRIPTION	MATERIAL	FINISH

VOLTAGE RATING	30 VDC
AMPERAGE RATING	2.4 AMPS
PROTECTION	IP67
OPERATING TEMPERATURE	-20°C TO 80°C

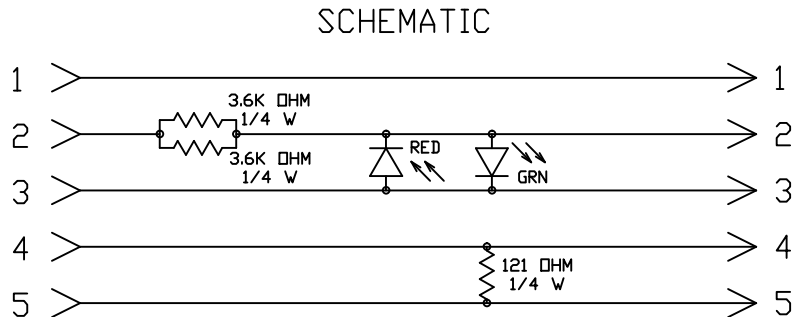

KEYWAY 15° WAS 45°
EC NO: WNA2012-0167
DRWN: BWOODMAN2011/11/04
CHKD: KJOZWIK
APPR: JFMURPHY

DESCRIPTION
REV

QUALITY SYMBOLS
▽=0
▽C=0

GENERAL TOLERANCES (UNLESS SPECIFIED)
mm INCH
4 PLACES ±--- ±---
3 PLACES ±--- ±.005
2 PLACES ±0.13 ±.010
1 PLACE ±0.25 ±.020
ANGULAR ±1/2°
DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE
IN/MM
DRAWN BY DATE
BWOODMAN 2011/11/04
CHECKED BY DATE
KJOZWIK 2011/11/16
APPROVED BY DATE

MATERIAL NO.
SEE TABLE
SIZE
B

SCALE
1:1
DESIGN UNITS
INCH
THIRD ANGLE
PROJECTION
TITLE
MIC 90D TERMINATED FEM
TO MIC STR MALE
SPCL KEYWAY ORIENT
MOLEX INCORPORATED
DOCUMENT NO.
SD-130028-008
SHEET NO.
1 OF 1