

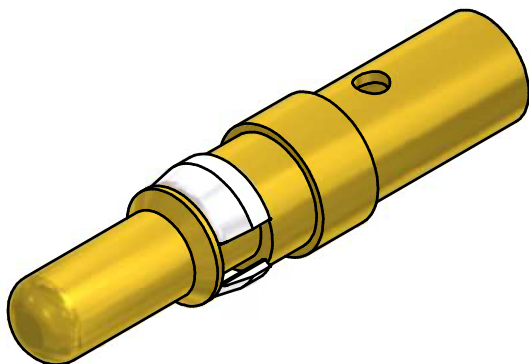
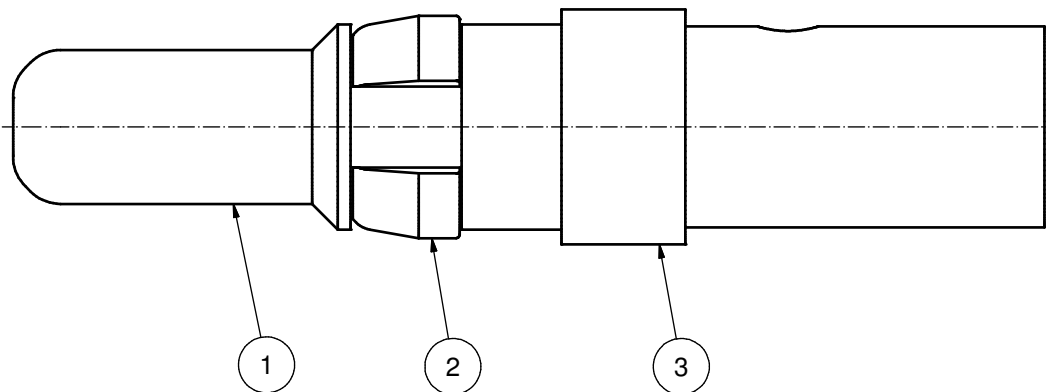


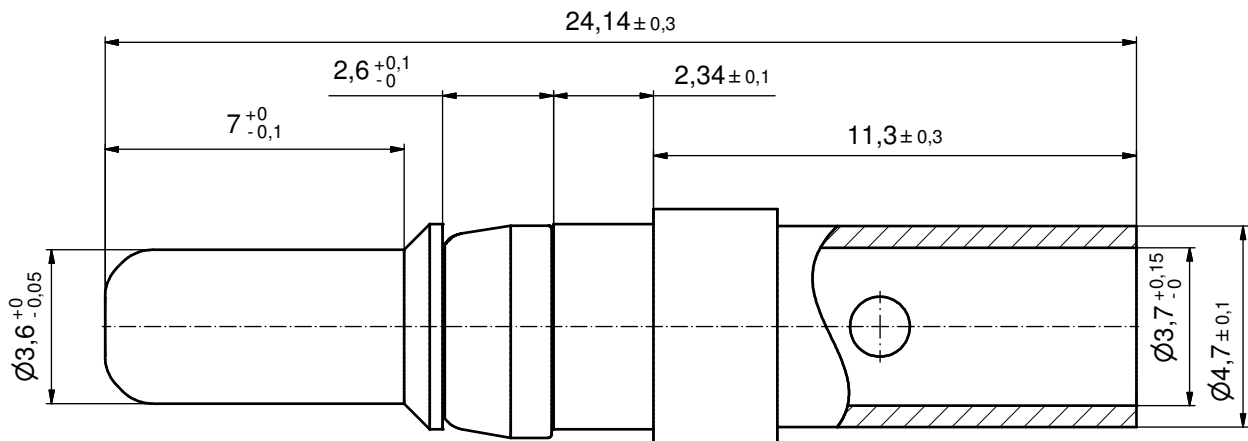

NOTES:
 CRIMPING:
 USE CRIMP TOOL: 360X10409X
 WITH TOOL INSERT: 36X20029X
 SELECTOR SETTINGS: 7 FOR AWG 10
 6 FOR AWG 12

plating	part no.
GOLD FLASH over NICKEL	131A11139X
30µin HARD GOLD over min. 50µin NICKEL	131C11139X

STRIPPING DIMENSIONS



RoHS compliant

3	1	REAR SIDE	COPPER ALLOY	GOLD FLASH over NICKEL
2	1	RETAINING RING	COPPER ALLOY	NICKEL PLATED
1	1	MATING SIDE	COPPER ALLOY	see table
item	quantity	part description	material	plating
partlist				
THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH			tolerance	scale: 8:1
			dim. in mm	material: see partlist
			drawn 10.11.14 Henneboel	title: HIGH POWER CONTACT MALE CRIMP VERSION 30A D-SUB COMBINATION
			appd. 10.11.14 Lehmenkühler	
			norm	
DO NOT ALTER CAD DRAWING BY HAND			d-old	dwg no:
			a Original	13K1A4808
rev.	description	date	name	part no: see table

CONEC

DIN-A3
sh: 1