



4

3

2

1

used for: D-SUB COMBINATION

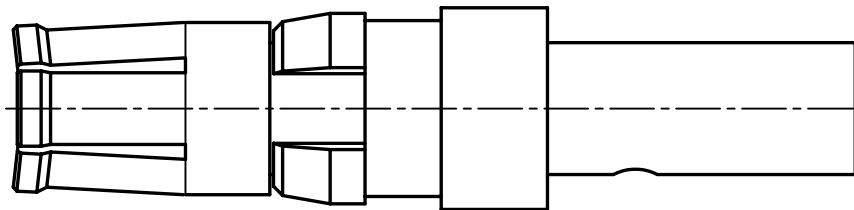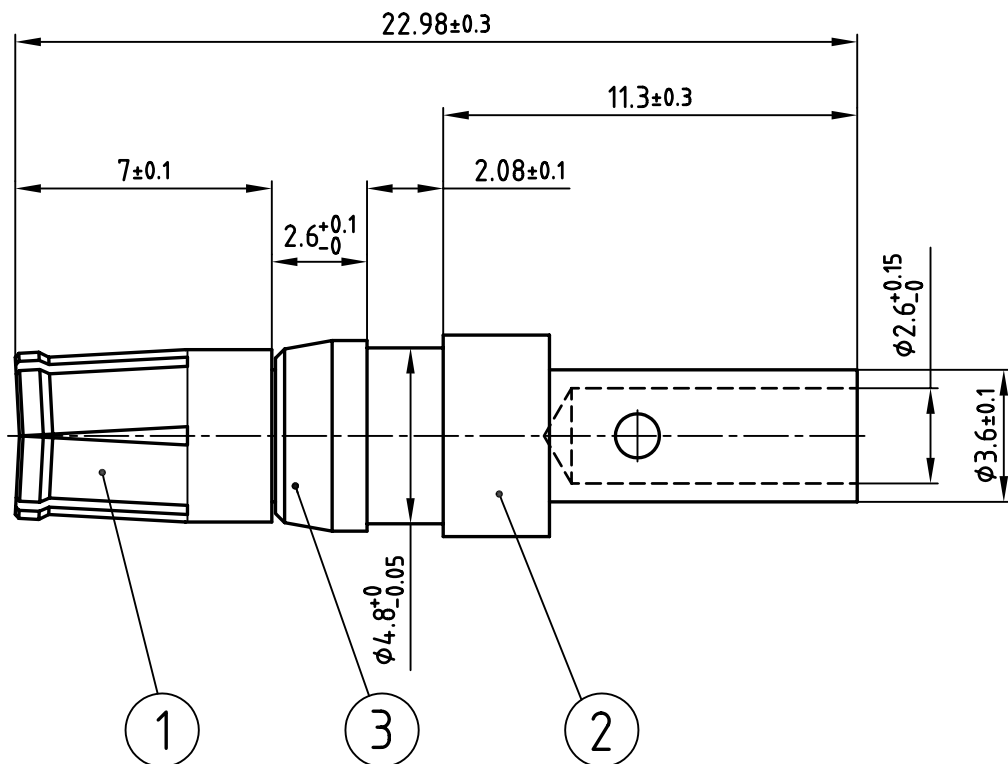

NOTES:

1. MATERIAL: COPPER ALLOY

2. PLATING:

ITEM 1: min. 30µ" HARD GOLD OVER min. 50µ" NICKEL

ITEM 2: min. 8µ" HARD GOLD OVER min. 50µ" NICKEL


ITEM 3: NICKEL PLATED

Directive 2002/95/EC
"RoHS"
Compliant

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

				tolerance		
rev.	description	date	name	1998	date	
				drawn	23.03.	Barcinski
				appd.	23.03.	Mickenbecker
				norm		
				d-old		

tolerance



scale:

5:1

material:

SEE NOTES

title:

HIGH POWER CONTACT FEMALE

CRIMP VERSION 20A

D-SUB COMBINATION

dwg no:

CAD/ /REL.13 DIN-A

13K1IE8A

4

sh: 1/1

product no:

132C11029X

4

3

2

1