

**Industrial Ethernet
VDATA CAT6**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com



- Suitable for Cat. 5 (up to 100 MHz) and Cat. 6 (up to 250 MHz Class E)
- Suitable for PoE (acc. to IEEE 802.3af) and PoE+ (acc. to IEEE 802.3at)
- Protection of all wire pairs
- Connection via RJ45 sockets
- Metal housing

General ordering data

Type	VDATA CAT6
Order No.	1348590000
Version	Terminal rail fixing, Surge protection, 48 V, 1 A, According to IEC61643-21
GTIN (EAN)	4050118153002
Qty.	1 pc(s).

**Industrial Ethernet
V DATA CAT6**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data
Dimensions and weights

Width	19 mm	Width (inches)	0.748 inch
Height	75 mm	Height (inches)	2.953 inch
Depth	46 mm	Depth (inches)	1.811 inch
Net weight	139 g		

Temperatures

Humidity	0...95 % (no condensation)	Operating temperature, max.	80 °C
Operating temperature, min.	-40 °C	Storage temperature, max.	85 °C
Storage temperature, min.	-40 °C	Operating temperature	-40 °C...80 °C
Storage temperature	-40 °C...85 °C		

General data

Colour	Silver grey	Design	Miscellaneous, Adapter plug
Mounting rail	TS 35 x 15, TS 35 x 7.5	Protection degree	IP20
Segment	Data surge protection	Suitable for	RJ45 plug

Insulation coordination acc. to EN 50178

Pollution severity	2	Surge voltage category	III
--------------------	---	------------------------	-----

Rated data IEC / EN

Discharge current I_{max} (8/20 μ s) wire-PE	10 kA	Discharge current I_n (8/20 μ s) wire-PE	5 kA
Discharge current, I_{imp} (10/350 μ s)	1 kA	Frequency range, max.	250 MHz
Insertion loss	≤ 1 dB @ 250 MHz	Lightning test current, I_{imp} (10/350 μ s) Wire-PE	1 kA
Max. continuous voltage, U_c (DC)	50 V	Protection level U_p (typ.)	≤ 550 V
Rated current I_N	1 A	Rated voltage (DC)	48 V
Requirements category acc. to IEC 61643-21	C2, D1	Response time	< 1 ns
Signal transmission properties (-3 dB)	250 kHz	Standards	According to IEC61643-21
Suitable for	RJ45 plug	Surge current-carrying capacity C2	10 kA
Surge current-carrying capacity D1	1 kA 10/350 μ s	Voltage type	AC/DC
Volume resistance	$< 0.1 \Omega$	Wire-PE capacitance @ 1 MHz, 1 Vrms	20 pF
Wire-wire capacitance @ 1 MHz, 1 Vrms	30 pF		

Connection data

Wire connection method	RJ45-Port
------------------------	-----------

Rated data UL

Rated Voltage U_N	48 V
---------------------	------

Classifications

ETIM 3.0	EC001473	ETIM 5.0	EC000510
ETIM 6.0	EC000943	UNSPSC	30-21-19-21
eClass 5.1	27-13-08-01	eClass 6.2	27-13-08-02
eClass 7.1	27-14-02-01	eClass 8.1	27-14-02-01
eClass 9.0	27-14-02-01	eClass 9.1	27-13-08-07

Data sheet**Industrial Ethernet
VDATA CAT6**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Technical data**Product information**

Descriptive text technical data Can also be used for CAT.5 applications

Approvals

Approvals




ROHS Conform

Downloads

Approval/Certificate/Document of Conformity	CE PAPER
Brochure/Catalogue	CAT 4.4 ELECTR 16/17 EN CAT 9 IETH 15/16 EN
Engineering Data	EPLAN, WSCAD
User Documentation	Instruction sheet

**Industrial Ethernet
VDATA CAT6**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

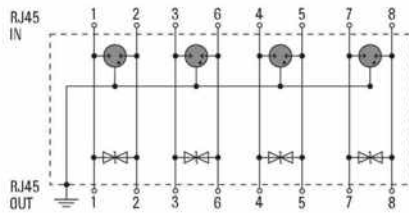

Circuit diagram