

1379165-4 ✓ ACTIVE



MQS

TE Internal #: 1379165-4

PCB Mount Header, Vertical, Wire-to-Board, 4 Position, 2.54 mm [.1 in] Centerline, Fully Shrouded, Tin, Through Hole - Solder, Signal, Yellow, MQS

[View on TE.com >](#)

Connectors > PCB Connectors > PCB Headers & Receptacles > SIGNAL HEADER



Connector System: **Wire-to-Board**

Number of Positions: **4**

Centerline (Pitch): **2.54 mm [.1 in]**

Sealable: **No**

PCB Mount Orientation: **Vertical**

[All SIGNAL HEADER \(407\)](#)

Features

Product Type Features

| | |
|-----------------------------------|-----------------------|
| Hybrid Header | No |
| Connector Shape | Rectangular |
| PCB Connector Assembly Type | PCB Mount Header |
| Header Type | Fully Shrouded |
| Connector System | Wire-to-Board |
| Sealable | No |
| Connector & Contact Terminates To | Printed Circuit Board |

Configuration Features

| | |
|----------------------------|----------|
| Number of Sections | 1 |
| Number of Signal Positions | 4 |
| Number of Positions | 4 |
| PCB Mount Orientation | Vertical |
| Number of Rows | 1 |



Electrical Characteristics

| | |
|------------------------------|--------|
| Nominal Voltage Architecture | 12 V |
| Operating Voltage | 12 VDC |

Body Features

| | |
|-----------------------|--------|
| Primary Product Color | Yellow |
|-----------------------|--------|

Contact Features

| | |
|--------------------------------------|-----------------|
| Contact Size | .63mm |
| Contact Type | Tab |
| Mating Tab Width | .63 mm[.025 in] |
| Mating Tab Thickness | .63 mm[.025 in] |
| Contact Mating Area Plating Material | Tin |

Termination Features

| | |
|---|-----------------------|
| Termination Method to Printed Circuit Board | Through Hole - Solder |
|---|-----------------------|

Mechanical Attachment

| | |
|--------------------------|-------------------|
| Mounting Holes | Without |
| Mating Retention | With |
| Mating Alignment | With |
| PCB Mount Alignment | With |
| Panel Mount Feature | Without |
| PCB Mount Retention | With |
| PCB Mount Retention Type | Boardlock |
| Mating Retention Type | Locking Interface |

Housing Features

| | |
|--------------------|----------------|
| Centerline (Pitch) | 2.54 mm[.1 in] |
|--------------------|----------------|

Dimensions

| | |
|-----------------------------|------------------|
| Connector Length | 20.4 mm[.803 in] |
| Connector Width | 8.6 mm[.339 in] |
| PCB Thickness (Recommended) | 1.6 mm[.063 in] |
| Profile Height from PCB | 18.7 mm[.736 in] |

Usage Conditions

| | |
|-----------------------------|---|
| Operating Temperature (Max) | 65 °C, 70 °C, 75 °C, 80 °C, 85 °C[149 °F][158 °F][167 °F][176 °F][185 °F] |
|-----------------------------|---|



| | |
|-----------------------------|---------------------------|
| Operating Temperature Range | -40 – 85 °C[-40 – 185 °F] |
|-----------------------------|---------------------------|

Operation/Application

| | |
|---------------------|--------|
| Shielded | No |
| Circuit Application | Signal |

Industry Standards

| | |
|------------------------|---------|
| UL Flammability Rating | UL 94HB |
|------------------------|---------|

Packaging Features

| | |
|--------------------|------|
| Packaging Type | Tray |
| Packaging Quantity | 585 |

Other

| | |
|------------------|-----------|
| Interface Number | 208-15592 |
|------------------|-----------|

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

| | |
|---|---|
| EU RoHS Directive 2011/65/EU | Compliant |
| EU ELV Directive 2000/53/EC | Compliant |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold |
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC |
| Halogen Content | Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free |
| Solder Process Capability | Wave solder capable to 260°C |

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 1379029-4
4POS MQS REC

Also in the Series | MQS



Automotive Connector Caps & Covers (133)



Automotive Connector EMC Shielding (2)



Automotive Connector Locks & Position Assurance(29)



Automotive Housings(492)



Automotive Seals & Cavity Plugs(26)



Automotive Terminals(95)



Insertion & Extraction Tools(42)




Other Automotive Connector Accessories(13)



PCB Headers & Receptacles(209)

Customers Also Bought

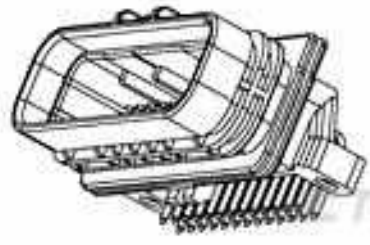


TE Part #6473711-1
SUPER SEAL 26POS CAP ASSY H AU



TE Part #2-966658-2
32pos MQS .63 header 180deg



TE Part #1-825440-5
MOD 2 PINHDR 2X15P.

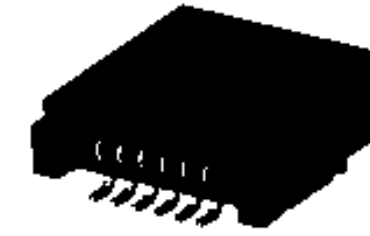

TE Part #2311714-1
6POS,TAB0.5X0.4,HDR ASSY,90DEG,
COD A



TE Part #2317523-1
2X4POS,NANOMQS,HDR ASSY,
180DEG,SMD,COD A



TE Part #2-2333210-2
FAKRA AUT,HDR ASSY,180DEG,COD
B



TE Part #2-2333210-5
1POS,FAKRA AUT,HDR ASSY,180DEG,
COD E



TE Part #2291364-5
4POS,PIN DIA 0.6,HEADER ASSY,
CODE E

TE Part #2330010-1
0.64 SMD 40POSITION CAP
ASSEMBLY V-TYPE

Documents

Product Drawings

[4pos MQS .63 header 180deg THR](#)

English

CAD Files

Customer View Model

[ENG_CVM_CVM_1379165-4_G.2d_dxf.zip](#)

English

3D PDF

3D

Customer View Model

[ENG_CVM_CVM_1379165-4_G.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1379165-4_G.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications



Product Specification

French

Instruction Sheets

Instruction Sheet (non U.S.)

English