

1393232-4 ✓ ACTIVE

SCHRACK


TE Internal #: 1393232-4

Power Relays, General Purpose Power Relay, Bistable, 2 Coils, Latching, 125 mW Coil Power Rating DC, 20  $\Omega$  Coil Resistance, 5 VDC Coil Voltage

[View on TE.com >](#)



Relays & Contactors > Relays > Power Relays

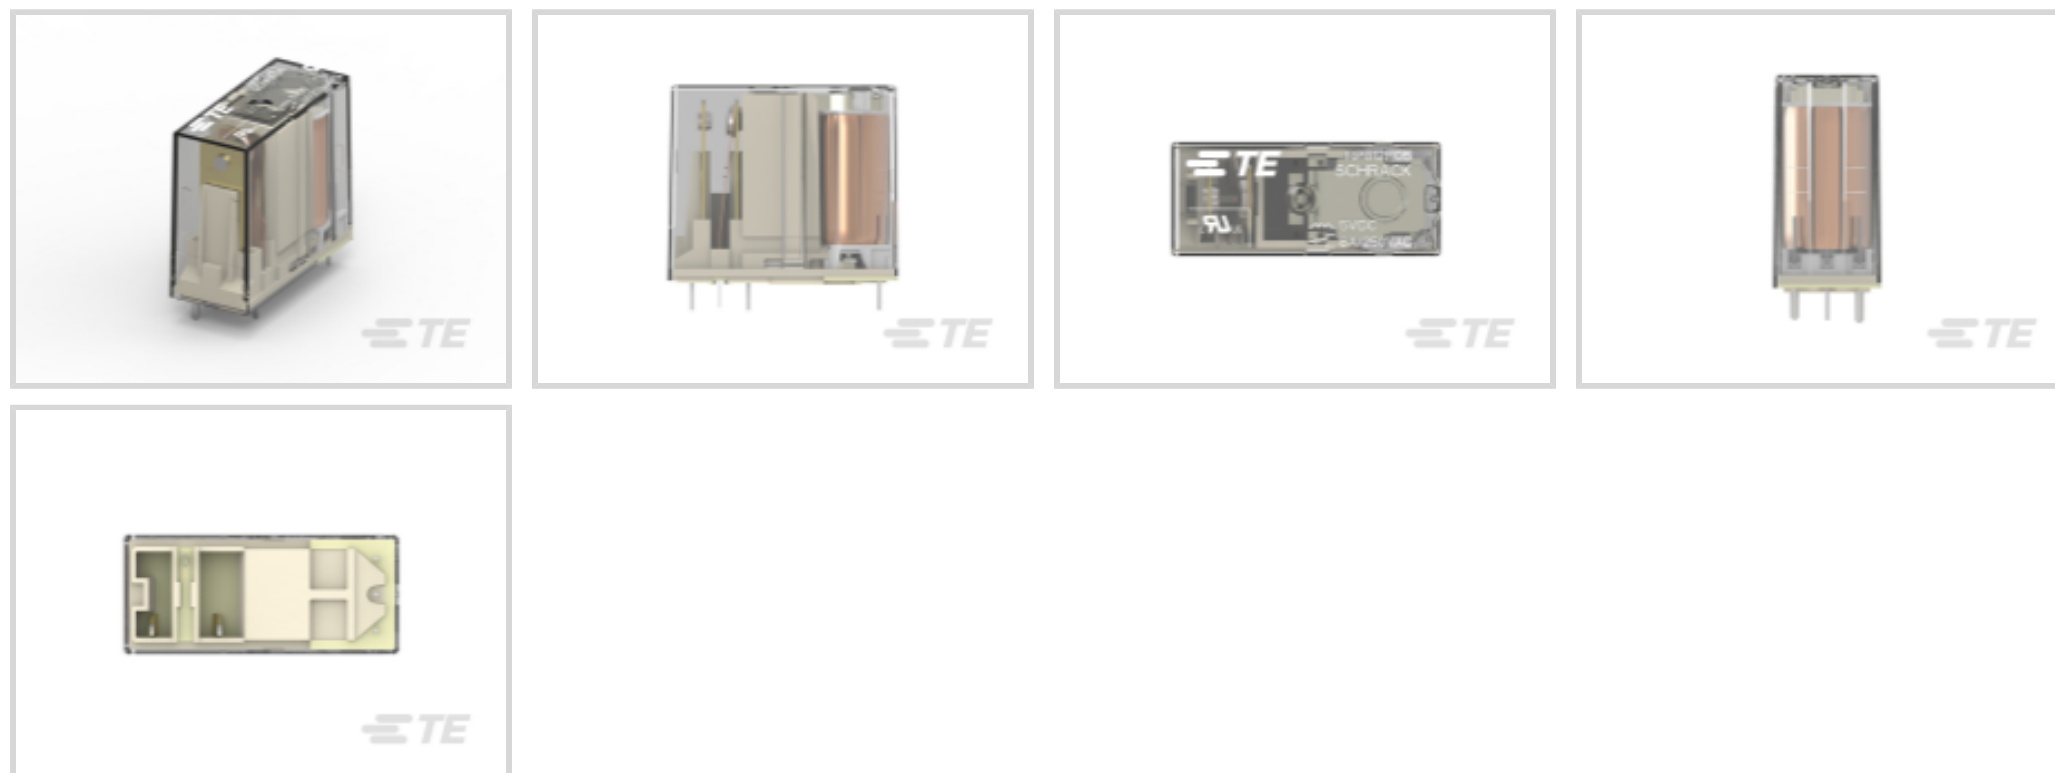

Relay Type: **General Purpose Power Relay**

Coil Magnetic System: **Bistable, 2 Coils, Latching**

Coil Power Rating DC: **125 mW**

Coil Resistance: **20  $\Omega$**

Coil Voltage Rating: **5 VDC**

## Features

### Product Type Features

Relay Type	General Purpose Power Relay
------------	-----------------------------

### Configuration Features

Contact Special Features	Single Contact
Contact Arrangement	1 Form C (CO)
Contact Number of Poles	1

### Electrical Characteristics

Coil Current	.25 A
Insulation Initial Dielectric Between Contacts & Coil	4000 Vrms
Insulation Initial Dielectric Between Open Contacts	1000 Vrms
Contact Limiting Making Current	8 A
Contact Limiting Short-Time Current	16 A
Coil Power Rating	1.25 W
Contact Limiting Continuous Current	8 A
Input Voltage	5 VDC



Contact Limiting Breaking Current	8 A
Coil Power Rating DC	125 mW
Coil Resistance	20 $\Omega$
Coil Voltage Rating	5 VDC
Contact Current Rating	8 A
Contact Switching Load (Min)	100mA @ 12V
Contact Switching Voltage (Max)	300 VDC
Contact Voltage Rating	30 VDC

### Body Features

Product Weight	18 g
----------------	------

### Contact Features

Contact Plating Material	Silver Nickel
Contact Material	AgNi90/10

### Termination Features

Relay Connection Type	PCB Termination
Terminal Configuration	Solder Pins

### Mechanical Attachment

Product Mount Type	Printed Circuit Board
--------------------	-----------------------

### Dimensions

Insulation Creepage Between Contact & Coil	8 mm
Insulation Clearance Between Contact & Coil	8 mm
Product Width	12.6 mm[.496 in]
Product Length	29 mm[1.14 in]
Product Height	25.5 mm[1 in]

### Usage Conditions

Environmental Ambient Temperature (Max)	70 °C
Environmental Category of Protection	RTIII
Operating Temperature Range	-40 – 70 °C

### Operation/Application

Actuating System	DC
Solder Process	Wave Solder
Output Switching	Random



Coil Magnetic System

Bistable, 2 Coils, Latching

### Packaging Features

Packaging Method

Box &amp; Tray

### Other

Length Class (Mechanical)

25 – 30 mm

Insulation Initial Dielectric Between Coil &amp; Contact Class

4000 V

Environmental Ambient Temperature Class

-40 – 70 °C

Height Class (Mechanical)

25 – 30 mm

Coil Power Rating Class

1000 – 1500 mW

Width Class (Mechanical)

12 – 16 mm

Contact Current Class

5 – 10 A

### Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU

Compliant

EU ELV Directive 2000/53/EC

Compliant

China RoHS 2 Directive MIIT Order No 32, 2016

No Restricted Materials Above Threshold

EU REACH Regulation (EC) No. 1907/2006

Current ECHA Candidate List: JUNE 2024 (241)  
 Candidate List Declared Against: JAN 2024 (240)  
 SVHC > Threshold:  
 Methanone, (diphenylphosphinyl)(2,4,6-trimethylphenyl)- (2% in Component Part)  
**Article Safe Usage Statements:**  
 Wash thoroughly after handling. Do not handle until all safety precautions have been read and understood. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Halogen Content

Not Low Halogen - contains Br or Cl &gt; 900 ppm.

Solder Process Capability

Wave solder capable to 260°C

#### Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on

requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

## Compatible Parts



## Customers Also Bought

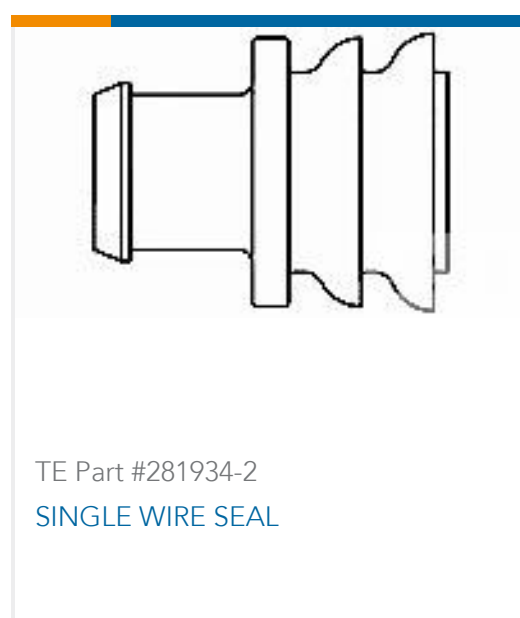

## Documents

### CAD Files

3D PDF

3D

Customer View Model

[ENG\\_CVM\\_CVM\\_1393232-4\\_A.2d\\_dxf.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_1393232-4\\_A.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_1393232-4\\_A.3d\\_stp.zip](#)

English



By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

## Datasheets & Catalog Pages

### Power PCB Relay RPII/1

English

## Product Specifications

### Definitions General Purpose Relays

English

## Agency Approvals

UL

English